

S = V (T1 + T2) + C

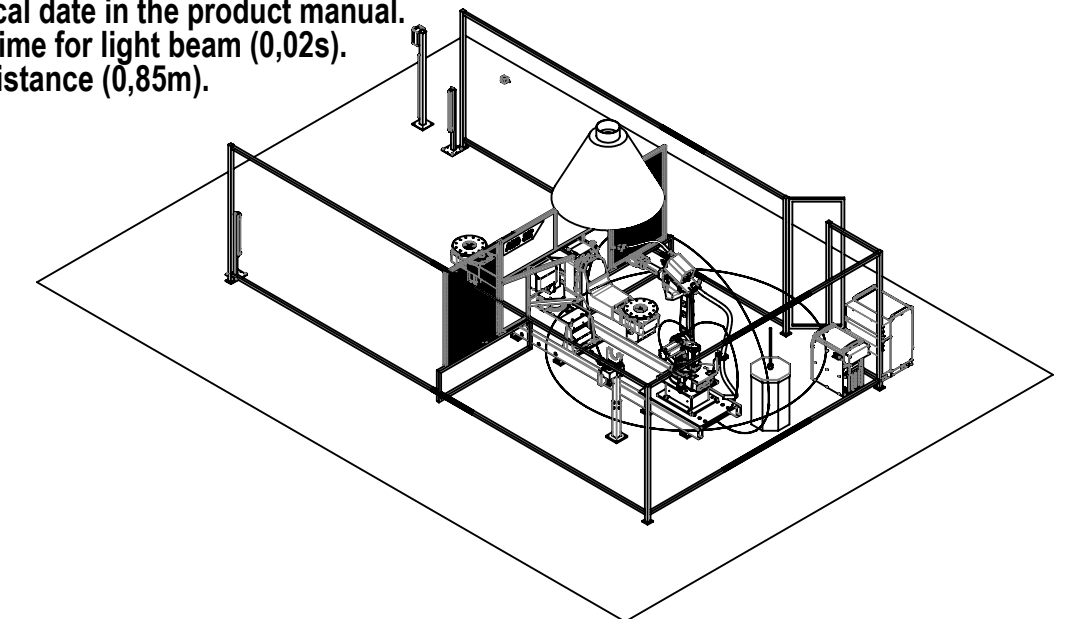
S Safety distance (m)



V Entering speed (1,6 m/s)

T1 Stopping time for the positioner (s).  
See technical data in the product manual.

T2 Response time for light beam (0,02s).

C Reaching distance (0,85m).



Prepared	Responsible Department RO/PRMW	Description	SWD	Drawing			
Approved	Take over department					Layout IRBP B-500 IRB 2600	Sheet 1
Status <b>Approved</b>	ECO number 500000054387					Layout IRBP B-500 IRB 2600	No. of sh. 1
		Document no. <b>3HAC042305-043</b>	Rev. ind. <b>01</b>				