Design overview

Reference plywood bookcase

DESIGN PACKET - CONSTRUCTION RECIPE UNSELECTED

Saved CAD, cut dimensions, drawings and this packet describe the same immutable revision. Outside depth includes the applied back. Dimensions are nominal; no fabrication fit tolerance or shelf load rating is supplied.

Verified geometry	7 physical panels; 3 semantic definitions; 3 manufacturing cut groups
Unit reference	1 in (25.4 mm); approximate fractions are explicitly labeled.

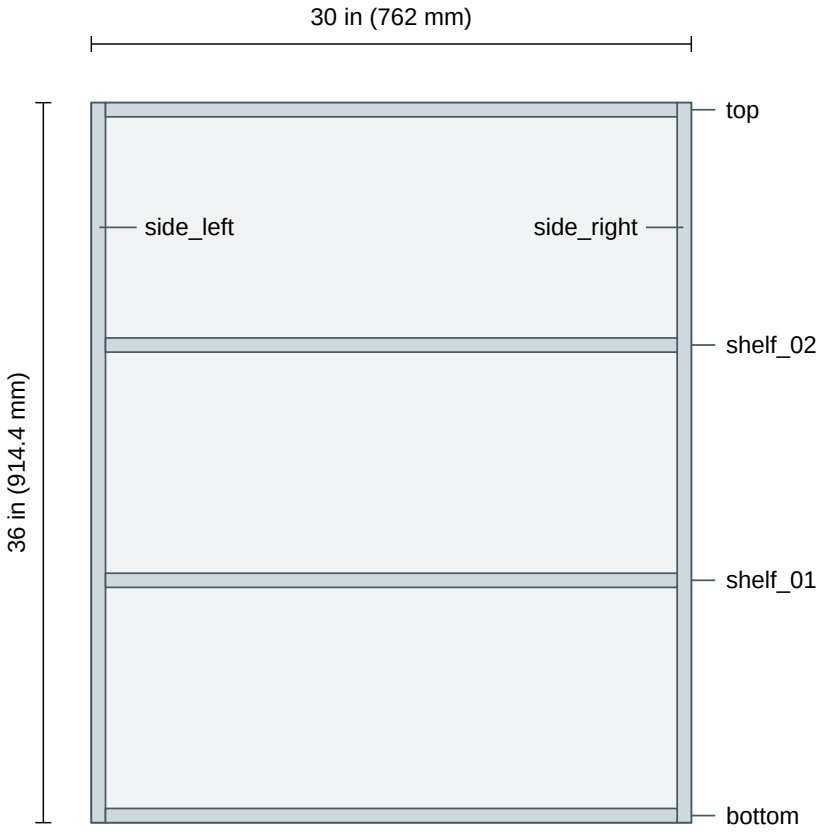

FRONT - full-height sides and between-side panels

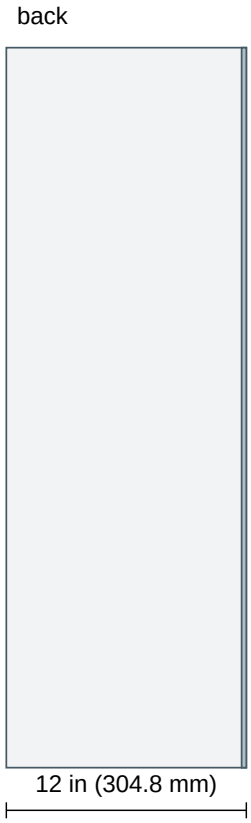

RIGHT - back included in outside depth

Instances and clear openings

Board identity and installed centers (millimeters)

side_left	panel_side | center X 9, Y 149.4, Z 457.2 mm
side_right	panel_side | center X 753, Y 149.4, Z 457.2 mm
bottom	panel_horizontal | center X 381, Y 149.4, Z 9 mm
shelf_01	panel_horizontal | center X 381, Y 149.4, Z 307.8 mm
shelf_02	panel_horizontal | center X 381, Y 149.4, Z 606.6 mm
top	panel_horizontal | center X 381, Y 149.4, Z 905.4 mm
back	panel_back | center X 381, Y 301.8, Z 457.2 mm

Clear openings - measured between saved opposing faces

Opening 1	Width approx. 28 37/64 in (726 mm); depth approx. 11 49/64 in (298.8 mm); clear height approx. 11 1/16 in (280.8 mm). Z faces 18 to 298.8 mm.
Opening 2	Width approx. 28 37/64 in (726 mm); depth approx. 11 49/64 in (298.8 mm); clear height approx. 11 1/16 in (280.8 mm). Z faces 316.8 to 597.6 mm.
Opening 3	Width approx. 28 37/64 in (726 mm); depth approx. 11 49/64 in (298.8 mm); clear height approx. 11 1/16 in (280.8 mm). Z faces 615.6 to 896.4 mm.

Spec SHA-256 2d4c00c1478a2cc839f2c3a32bbd6d2072196de2e0f8cb736ab08d9d3560aa2b

Grouped cuts and materials

Finished sizes, rough blanks and kerf remain separate. Grain is local L where declared. Groups combine panels only when their complete manufacturing fingerprint matches.

Quantity 2 - panel_side

Members: side_left, side_right

Finished L / W / T	36 in (914.4 mm) | approx. 11 49/64 in (298.8 mm) | approx. 45/64 in (18 mm)
Rough L / W / T	36 in (914.4 mm) | approx. 11 49/64 in (298.8 mm) | approx. 45/64 in (18 mm)

Quantity 4 - panel_horizontal

Members: bottom, shelf_01, shelf_02, top

Finished L / W / T	approx. 28 37/64 in (726 mm) | approx. 11 49/64 in (298.8 mm) | approx. 45/64 in (18 mm)
Rough L / W / T	approx. 28 37/64 in (726 mm) | approx. 11 49/64 in (298.8 mm) | approx. 45/64 in (18 mm)

Quantity 1 - panel_back

Members: back

Finished L / W / T	36 in (914.4 mm) | 30 in (762 mm) | approx. 15/64 in (6 mm)
Rough L / W / T	36 in (914.4 mm) | 30 in (762 mm) | approx. 15/64 in (6 mm)

---

plywood_back	Example back plywood. Actual approx. 15/64 in (6 mm). Nominal label: 1/4 in plywood (label only) (display only).
plywood_main	Example main plywood. Actual approx. 45/64 in (18 mm). Nominal label: 3/4 in plywood (label only) (display only).
Cut process	Saw kerf 3.2 mm; rough allowance per edge 0 mm. No sufficient sheet count is asserted without a verified stock layout.

Spec SHA-256 2d4c00c1478a2cc839f2c3a32bbd6d2072196de2e0f8cb736ab08d9d3560aa2b

Measured part - panel_side

Physical members	side_left, side_right
Local length L	36 in (914.4 mm)
Local width W	approx. 11 49/64 in (298.8 mm)
Actual thickness T	approx. 45/64 in (18 mm)
Local convention	Centered origin. +X=L, +Y=W, +Z=T. Grain follows L where declared. This face diagram is nominal and uncompensated.

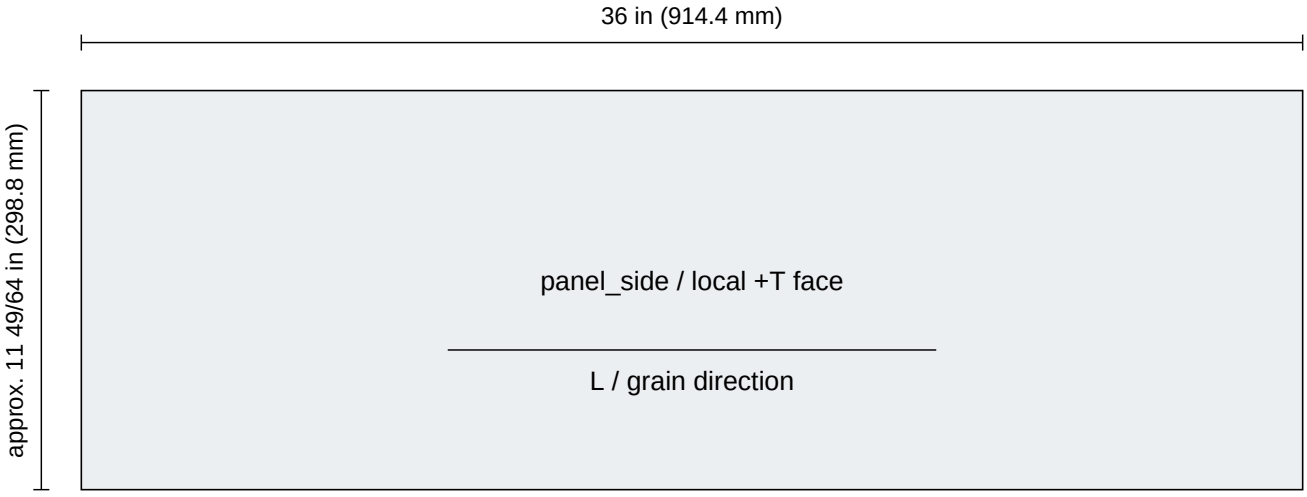

Thickness profile



T = approx. 45/64 in (18 mm)

Companion drawing: drawings/panel_side-metric.pdf. Genuine cadgen A4 orthographic/isometric projections and native dimensions remain millimeters.

Measured part - panel_horizontal

Physical members	bottom, shelf_01, shelf_02, top
Local length L	approx. 28 37/64 in (726 mm)
Local width W	approx. 11 49/64 in (298.8 mm)
Actual thickness T	approx. 45/64 in (18 mm)
Local convention	Centered origin. +X=L, +Y=W, +Z=T. Grain follows L where declared. This face diagram is nominal and uncompensated.

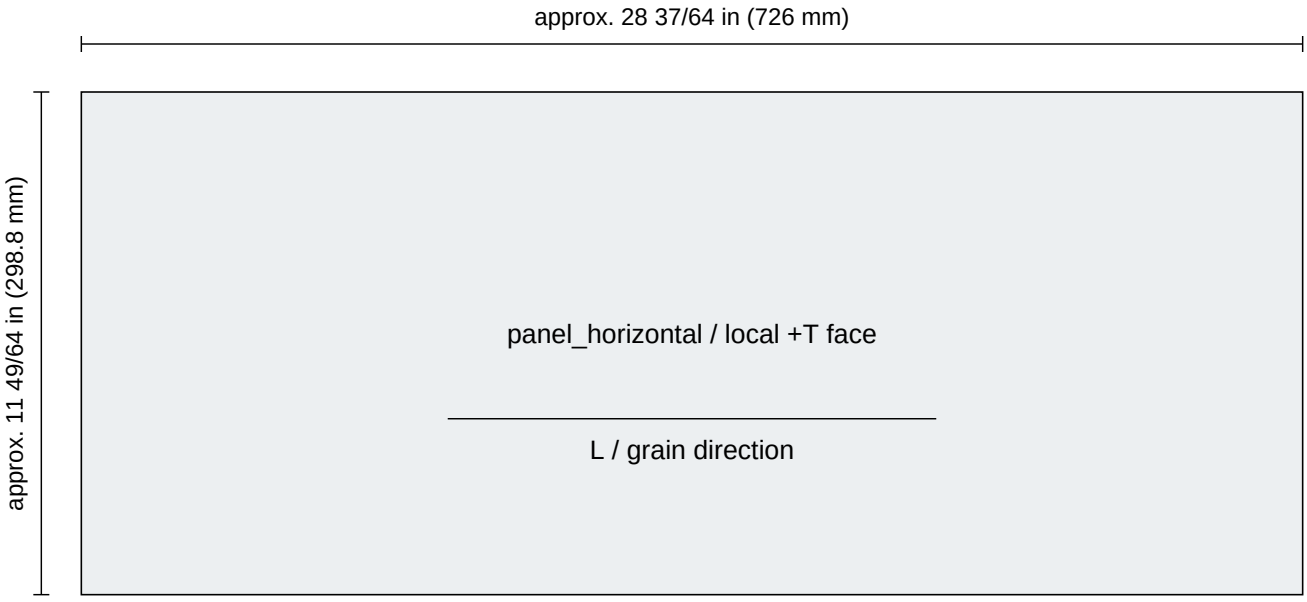

Thickness profile



T = approx. 45/64 in (18 mm)

Companion drawing: drawings/panel_horizontal-metric.pdf. Genuine cadgen A4 orthographic/isometric projections and native dimensions remain millimeters.

Measured part - panel_back

Physical members	back
Local length L	36 in (914.4 mm)
Local width W	30 in (762 mm)
Actual thickness T	approx. 15/64 in (6 mm)
Local convention	Centered origin. +X=L, +Y=W, +Z=T. Grain follows L where declared. This face diagram is nominal and uncompensated.

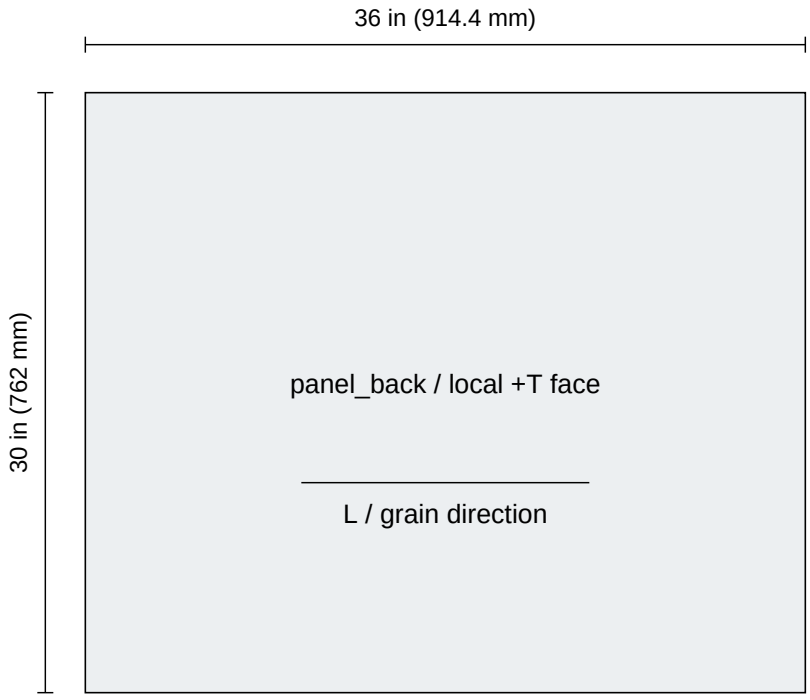

Thickness profile

T = approx. 15/64 in (6 mm)

Companion drawing: drawings/panel_back-metric.pdf. Genuine cadgen A4 orthographic/isometric projections and native dimensions remain millimeters.

Construction state and revision details

Construction status	recipe_unselected
Physical review	NOT REVIEWED - no actual build, service behavior or load capacity is certified.

Choose a compatible construction method; this revision is a design packet.

Missing attachment method: no pocket settings, fastener quantity or assembly instructions have been inferred from the panel geometry. Compatible recipes must be selected and checked against measured stock and the tool set.

Installed method: Kreg 720 plywood bookcase - 19.05 mm panels, 6.35 mm back, 14 in depth

This method's exact applicability is 762 x 914.4 x 355.6 mm, actual 19.05 mm main panels and 6.35 mm back. This revision's measured stock is not silently changed to fit it.

Template	plywood_bookcase_v1 / 1.0.0
Resolved SHA-256	d81132362ea0a2b73cea1d3cffe4a6d18a5af0352a8ae83f1141f1c71643f8dc
Publication source	c727bd7a-72b7-4dcf-8710-0ab3474cd543

The current STEP occurrence map is bound to the exact assembly hash. Rebuilds receive current selectors; old face/occurrence references are not manufacturing identity.