

Practical-6**Name:** Lynsey Fernandes**Roll no:** 1024140

Branch: Comp-A

Batch: B2


Step 1: Open network settings

```
ax408@ax408-ThinkCentre-neo-50s-Gen-5:~$ ifconfig
enp2s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 172.16.20.169 netmask 255.255.254.0 broadcast 172.16.21.255
    inet6 fe80::d2f4:5ff:fe1:6ee6 prefixlen 64 scopeid 0x20<link>
    ether d0:f4:05:f1:6e:e6 txqueuelen 1000 (Ethernet)
    RX packets 24317 bytes 5617409 (5.6 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 1342 bytes 164345 (164.3 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0


lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 444 bytes 56039 (56.0 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 444 bytes 56039 (56.0 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ax408@ax408-ThinkCentre-neo-50s-Gen-5:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 10
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp2s0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group def
    link/ether d0:f4:05:f1:6e:e6 brd ff:ff:ff:ff:ff:ff
    inet 172.16.20.169/23 brd 172.16.21.255 scope global dynamic noprefixroute enp2s0
        valid_lft 690578sec preferred_lft 690578sec
    inet6 fe80::d2f4:5ff:fe1:6ee6/64 scope link
        valid_lft forever preferred_lft forever

ax408@ax408-ThinkCentre-neo-50s-Gen-5:~$ route -n
Kernel IP routing table
Destination        Gateway           Genmask          Flags Metric Ref    Use Iface
0.0.0.0            172.16.20.1     0.0.0.0          UG    100    0      0 enp2s0
172.16.20.0        0.0.0.0         255.255.254.0    U     100    0      0 enp2s0
```

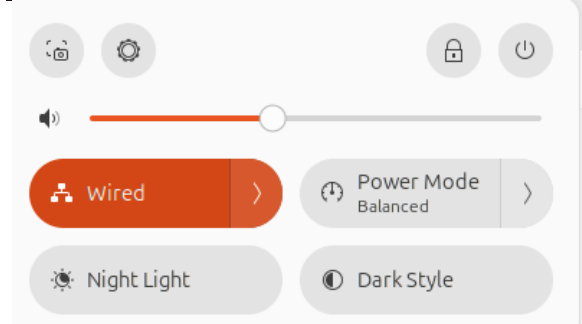

Step 2: Select wired connection

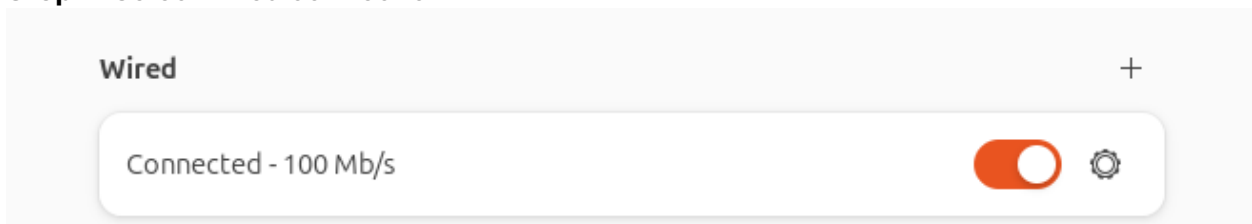

Step 3: Go to IPv4 Setting

Cancel Wired Apply

Details Identity IPv4 IPv6 Security

IPv4 Method

☒ Automatic (DHCP) ☐ Link-Local Only

☐ Manual ☐ Disable

☐ Shared to other computers

Step 4: Add first IP address

Addresses

Address	Netmask	Gateway	
172.16.20.169	255.255.255.0	172.16.20.1	

Step 5: Add Multiple IP addresses

Addresses

Address	Netmask	Gateway	
172.16.20.169	255.255.255.0	172.16.20.1	
172.16.20.170	255.255.255.0		
172.16.20.171	255.255.255.0		

Step 6: Save and apply

Cancel Wired Apply

Step 7: Verify connection

```
ax408@ax408-ThinkCentre-neo-50s-Gen-5:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 10
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp2s0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group def
    link/ether d0:f4:05:f1:6e:e6 brd ff:ff:ff:ff:ff:ff
    inet 172.16.20.169/24 brd 172.16.20.255 scope global noprefixroute enp2s0
        valid_lft forever preferred_lft forever
ax408@ax408-ThinkCentre-neo-50s-Gen-5:~$ ping 172.16.20.169
PING 172.16.20.169 (172.16.20.169) 56(84) bytes of data.
64 bytes from 172.16.20.169: icmp_seq=1 ttl=64 time=0.052 ms
64 bytes from 172.16.20.169: icmp_seq=2 ttl=64 time=0.048 ms
64 bytes from 172.16.20.169: icmp_seq=3 ttl=64 time=0.049 ms
64 bytes from 172.16.20.169: icmp_seq=4 ttl=64 time=0.049 ms
64 bytes from 172.16.20.169: icmp_seq=5 ttl=64 time=0.047 ms
64 bytes from 172.16.20.169: icmp_seq=6 ttl=64 time=0.047 ms
```