



ABOUT US:-

SOBHAINFRA TECH PRIVATE LIMITED Har Nirman Ki Jaan

Sobhainfra Tech Private Limited, a proud part of the Sobha Group, has been engaged in the business of manufacturing high-quality building materials since 2003. With decades of industry experience, the company stands as a trusted name in delivering performance-driven construction solutions across India.

Built on a foundation of quality, integrity, and innovation, Sobhainfra Tech Pvt.Ltd specializes in advanced dry mix construction materials designed to enhance durability, strength, and work efficiency at construction sites.

Under the leadership of:



Mr. Dharendra S. Jha – Director



Mr. Nripendra S. Jha – Director

The company continues to expand its footprint with a strong commitment to manufacturing excellence and customer satisfaction.

Manufacturing Plants – Gujarat.
Manufacturing Capacity **20000+** Bags per day.

Factory 1.

**Survey No. 123, Near Navsari Food Product,
Village Amarpore, Sub-District & District Navsari
396445, (Gujarat).**

Factory 2.

**NH 48, Near Kolei Khadi Sarodhi, Sarodhi, Valsad
396001, (Gujarat).**

Head Office.

**104, 1st Floor, Hari Om CHSL, Near Royal Collage, MIDC Road
Mahajanwadi, Mira Road (E), Thane - 401107(Maharashtra).**





SOBHA BLOCK FIX (Dry Block Joining Mortar)

Description

SOBHA FIX is a versatile, high-strength adhesive designed for laying AAC blocks and concrete blocks with thin joints.

Key Qualities



HIGH BOND STRENGTH



THIN JOINTING



SPEED OF CONSTRUCTION



ECO-FRIENDLY



NO CURING REQUIRED



THERMAL INSULATION

Technical Data

Appearance	Grey Powder
Wet density	1700-1800 kg/m ³
Pot life	>30 min
Dry Density	1300-1400 kg/m ³
Tensile splitting strength	>0.4 N/m ²
Hard dry	24 hours
Compressive at 28 days	> 5.0 N/mm ²
Water Ratio	10-12 Ltr/per 40 kg bag





SOBHA PLAST (Dry Ready Mix Plaster Mortar)

Description

SOBHA PLAST is a high-quality, mineral-based, ready-to-use plaster designed for internal and external application. It is composed of high-grade cement, graded sand, and performance-enhancing polymers.

Key Qualities



CRACK RESISTANCE



SELF-CURING



SUPERIOR FINISH



ENHANCED BONDING



CONSISTENT QUALITY




HIGH COVERAGE

METHOD OF APPLICATION



Prepare the surfaces before the Sobha Plast application by removing oil, bond inhibiting agents, dirt, dust and laitance. The cleaning can be carried out with suitable methods like by using wire brush, water jetting, mopping, etc.

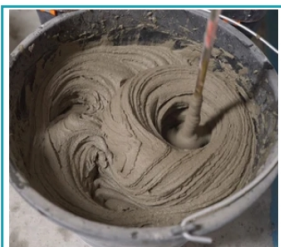

Sobha Plast mortar requires 16-19% of water by weight of material. Mix Sobha Plast to the measured quantity of water using mechanical stirring for 2-3 minutes to ensure a consistency free of lumps.



Applied with a spatula, Sobha Plast is designed for easy use by skilled masons, following the same techniques as conventional plastering.

Technical Data	
Bulk density	1500-1600 Kg/m ³
Water powder ratio	6.7 ltr
Pot life	1 hour @ 27°C
Compressive strength @ 28 days	12-22 Mpa
Coverage	16-18 sq.ft / bag
Thickness of layer	10-12 mm per coat
Water curing	2-3 times for 6-7 days
Wastage	Negligible
Final finish	Excellent

Shelf Life & Storage

- Shelf life 6 months from date of manufacture.

Safety Instructions

- Prevent the material from splashing into the eyes.
- Keep the bag away from children.
- Wear suitable protective clothing, gloves and eyes/face protection.
- Consult a physician if an irritation occurs.





SOBHA TILE ADHESIVE - TYPE- 1

For Ceramic Tiles on Floors and Walls.

Description

A polymer-modified, cement-based adhesive specifically designed for fixing ceramic tiles in internal areas.

Key Qualities



**EXCELLENT
ADHESION**



**WATER
RESISTANT**



**EASY
WORKABILITY**



ECONOMICAL



ANTI-SLIP

Technical Data (T1)	
Tensile Adhesion Strength	
Dry Condition (N/mm ²)	≥ 0.50
Wet Condition (N/mm ²)	NA
Shear Adhesion Strength	
Dry Condition (N/mm ²)	>0.4 N/m ²
Heat Aging Condition (N/mm ²)	NA
Wet Condition (N/mm ²)	NA
Open Time (Minutes)	≥ 20
Adjustment Time (Minutes)	≥ 20
Slip (mm)	≤ 0.5
Pot Life	1 hr



SOBHA TILE ADHESIVE - TYPE- 2

For Vitrified Tiles & Natural Stones.

Description

High-performance adhesive formulated for vitrified tiles and large format tiles for both internal and external applications.

Key Qualities



HIGH POLYMER



FLEXIBILITY



HEAVY DUTY



SHOCK RESISTANT



VERSATILE

Technical Data (T2)	
Tensile Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.00
Wet Condition (N/mm ²)	≥ 1.00
Shear Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.25
Heat Aging Condition (N/mm ²)	≥ 1.00
Wet Condition (N/mm ²)	≥ 1.00
Open Time (Minutes)	≥ 20
Adjustment Time (Minutes)	≥ 20
Slip (mm)	≤ 0.5
Pot Life	1 hr





SOBHA TILE ADHESIVE - TYPE- 3

Tile Adhesives for Stones.

Description

A premium grade adhesive with high bond strength for heavy-duty applications, specifically for external vertical surfaces.

Key Qualities



ZERO VERTICAL SLIP



EXTREME WEATHER RESISTANCE



HIGH DEFORMABILITY



EXTENDED OPEN TIME



EFFLORESCENCE RESISTANT

Technical Data (T3)	
Tensile Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.50
Wet Condition (N/mm ²)	1.00
Shear Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.50
Heat Aging Condition (N/mm ²)	≥ 1.00
Wet Condition (N/mm ²)	≥ 1.00
Open Time (Minutes)	≥ 25
Adjustment Time (Minutes)	≥ 25
Slip (mm)	≤ 0.5
Deformability	≥ 2.5 mm < 5.00 mm
Pot Life	1 hr



SOBHA TILE ADHESIVE - TYPE- 4

Highly Deformable Tile Adhesive.

Description

A highly flexible, specialized adhesive designed for glass mosaics, swimming pools, and demanding substrates like metal or wood.

Key Qualities



MAXIMUM FLEXIBILITY




UNDERWATER STABILITY



CHEMICAL RESISTANCE



SUPERIOR SUCTION



VIBRATION DAMPING

Technical Data (T4)	
Tensile Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.50
Wet Condition (N/mm ²)	1.00
Shear Adhesion Strength	
Dry Condition (N/mm ²)	≥ 1.50
Heat Aging Condition (N/mm ²)	≥ 1.00
Wet Condition (N/mm ²)	≥ 1.00
Open Time (Minutes)	≥ 25
Adjustment Time (Minutes)	≥ 25
Slip (mm)	≤ 0.5
Deformability	≥ 5.00 mm
Pot Life	1 hr



PRODUCT APPLICATION MATRIX

	CE	VT	SA	HF
Tile Type:	Type 1	Type 2	Type 3	Type 4
Ceramic Tiles	✓	✓	✓	✓
Vitrified Tiles		✓	✓	✓
Glass Mosaic		✓	✓	✓
Natural Stone Tiles		✓	✓	✓
Clay Tiles		✓	✓	✓
Porcelain Tiles			✓	✓
Tile Size:				
≤ 300 × 300 mm	✓	✓	✓	✓
≤ 600 × 600 mm		✓	✓	✓
≤ 1200 × 1200 mm			✓	✓
> 1200 × 1200 mm				✓
Substrate:				
Cement Plaster	✓	✓	✓	✓
Cement Concrete	✓	✓	✓	✓
Cement Screed	✓	✓	✓	✓
Gypsum Board			✓	✓
Plywood			✓	✓
Wood			✓	✓
Calcium Silicate Board			✓	✓
MDF Board			✓	✓
Fiber Cement Board			✓	✓
Cement Board			✓	✓
Bison Panels			✓	✓
Application Condition:				
Dry	✓	✓	✓	✓
Wet		✓	✓	✓
Application Area:				
Internal Floor	✓	✓	✓	✓
Internal Wall	✓	✓	✓	✓
External Floor		✓	✓	✓
External Wall			✓	✓

DIRECTIONS FOR USE



Add Tile Adhesive to clean potable water in the mixing pot



Mix Manually or Mechanically until homogeneous paste is obtained



Allow to stand for 5 Mins for Polymer additives to dissolve then remix



Apply Tile Adhesive on the substrate with a trowel



Comb with 6mm x 6mm notch trowel.



Fix the tiles in place and tap gently with wooden/rubber mallet to ensure complete coverage



Allow to set for a period of 24 Hrs then start filling the joints with Sobha tile joint grout.

DISCLAIMER: The use of this product is beyond the manufacture's control, and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. *Specifications are subject to change without notice.




SOBHA SUPER FINE FLYASH Quality Processed Flyash

Description

Finely graded fly ash used as a partial replacement for cement to enhance concrete durability and work ability.

Uses & Applications

- Manufacturing of high-quality RMC.
- Construction of dams, bridges, and highways.
- Production of pre-cast concrete elements.

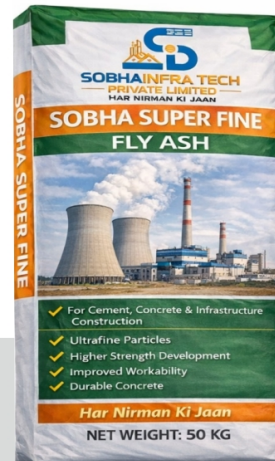


SOBHA ULTRA FINE FLYASH Micro-Silica Grade Performance Additive

Description

An ultra-micronized fly ash designed for high-performance concrete (HPC) and specialized construction requirements

Uses & Applications

- Marine structures and coastal construction.
- High-strength concrete (M60 and above).
- Specialized repair mortars and grouts.

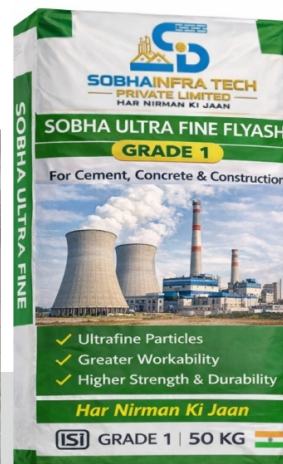



SOBHA SHAKTI MICRO FINE GGBS CEMENT

ENGINEER'S CONFIDENCE

Description

Micro Fine GGBS is an ultra-fine, high-reactivity supplementary cementitious material (SCM) produced by grinding granulated blast furnace slag to a much finer particle size than standard GGBS. It is used in high-performance concrete and cementitious grouts to enhance strength, durability, and Workability.


Key Qualities

- Ultra-fine particle size – Finer than OPC and standard GGBS for better micro structure.
- High pozzolonic reactivity – Enhances strength and durability.
- Light off-white color – Ideal for architectural applications.
- Improved particle packing – Reduces porosity and increases density.
- Low heat of hydration – Minimizes thermal cracking.

Conclusion

GGBS blended concrete has been used successfully in concrete for many years, in many countries throughout the world. From all the available technical literature it is suggested that, there are potentially many technical benefits to be gained from using GGBS. When structures have to be designed for durability requirements in very aggressive environment, GGBS blend mixes are recommended in standards of most developed and developing countries.

Many countries have accepted the benefits and have recommended its use in their national standards. Once the user is made aware of the properties of the material and has understood the benefits to be gained, there is no reason why it should not continue to be used successfully in existing and future projects.

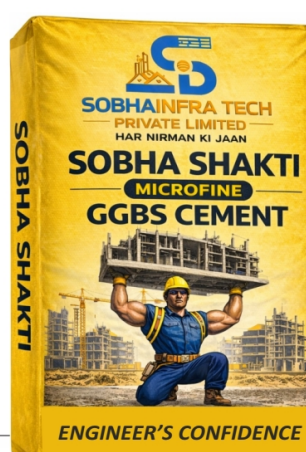

OUR OTHER COMPANIES

- SHOBHA BUILDTech.
- SHOBHA READY PLAST.



OUR OTHER PRODUCTS



NARESHWAR SAND



BLACK SAND



POND ASH



AGGREGATE METAL



BROWN BARDOLI SAND



SILICA SAND



AAC BLOCK



DRY SAND

OUR TRUSTED CLIENTS



5000+ Happy Customers.