
Table

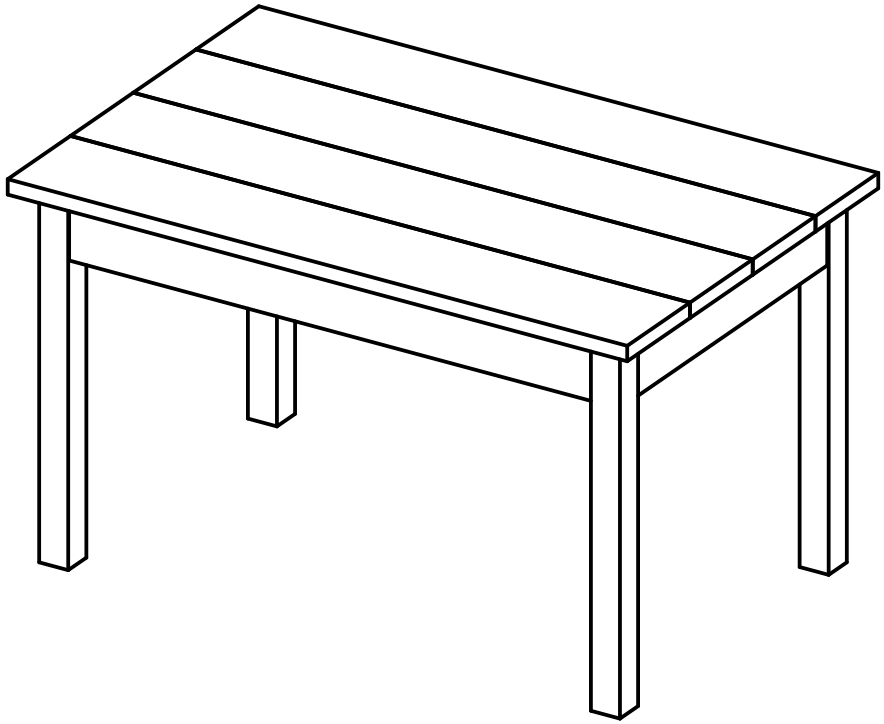

parts	22 (6 different)
overall	1280 x 830 x 750 (W x D x H)
material	oak
date	2026-10-24
made with	woodwright 0.7.0

Contents

Description **3**

Drawings **4**

Assembly 4

Parts 5

1 leg 6

2 apron_front_back 7

3 apron_right_left 8

4 top_1_4 9

5 top_2_3 10

6 button 11

Cut list **12**

Appendix: source **13**

Description

A dining or work table in solid oak: four square legs, wide aprons tenoned into them, and a top glued up from boards edge to edge.

How it is built


- The aprons are joined to the legs with **haunched mortise and tenon** joints, set down from the top of the legs so the legs keep their tops whole. The two tenons meeting in a leg are mitred at their ends.
- The top is *not* glued to the frame: wooden **buttons**, screwed to its underside, have tongues in short mortises in the aprons, so the top can move across its grain with the seasons.

Order of work


1. Mill all the parts to their cut sizes (see the cut list).
2. Mark out and cut the mortises in the legs, then the tenons to fit them.
3. Cut the button mortises in the aprons, and dry-fit the frame.
4. Glue up the frame: first the two short sides, then join them with the long aprons; check the diagonals.
5. Glue up the top, flatten it, and fix it with the buttons.




TOP

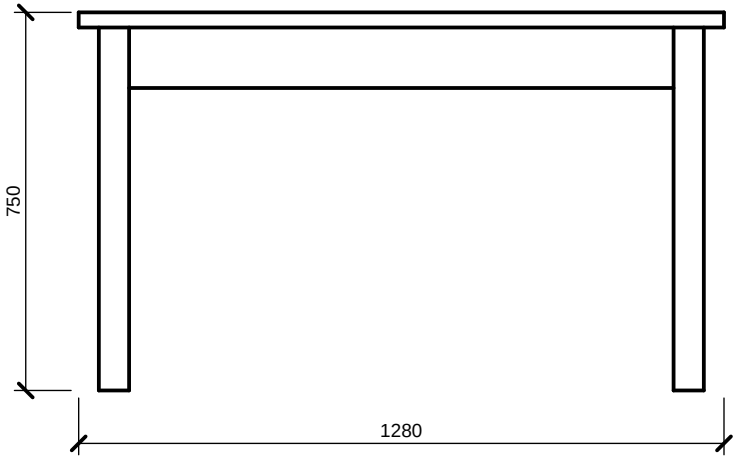

FRONT

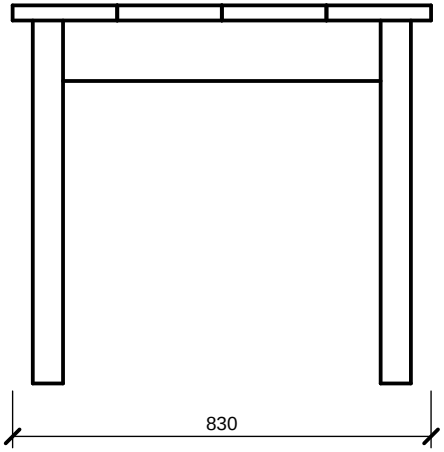


RIGHT SIDE

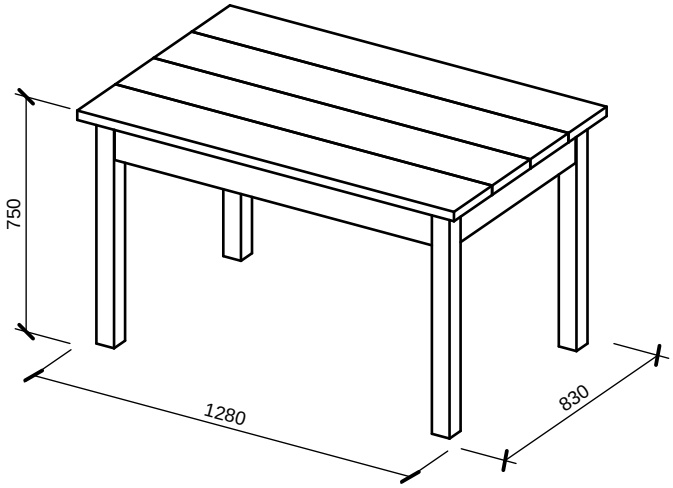

ISOMETRIC


assembly	**table**
parts	22 (6 different)
overall	1280 x 830 x 750 (W x D x H)
material	oak
scale	1:15, mm

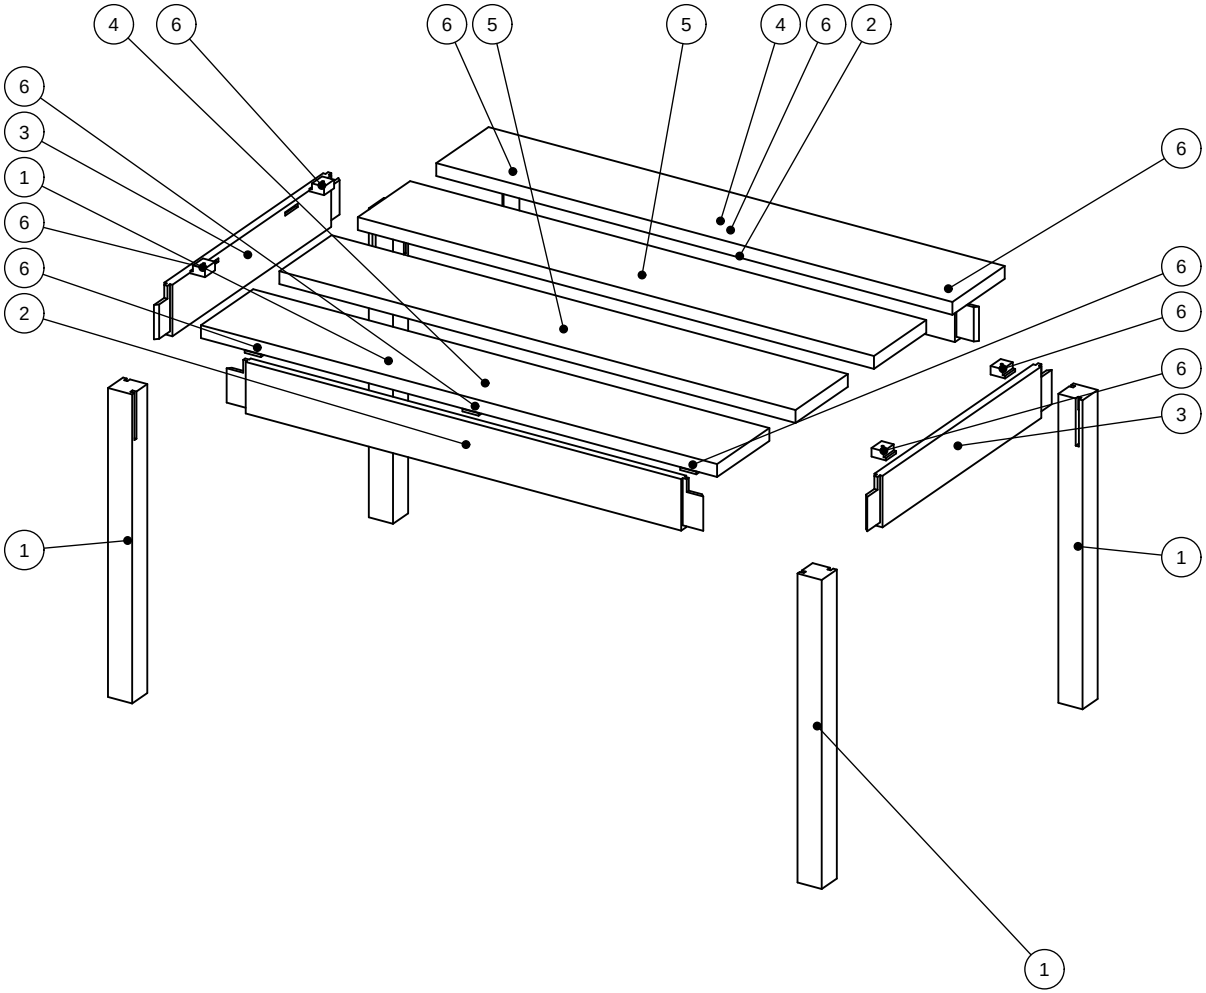


EXPLODED

no.	part	qty	cut size (L x W x T)	material
1	leg	4	720 x 60 x 60	oak
2	apron_front_back	2	1182 x 120 x 20	oak
3	apron_right_left	2	732 x 120 x 20	oak
4	top_1_4	2	1280 x 207.5 x 30	oak
5	top_2_3	2	1280 x 207.5 x 30	oak
6	button	10	36 x 40 x 20	oak


assembly	**table**
parts	22 (6 different)
overall	1280 x 830 x 750 (W x D x H)
material	oak
scale	not to scale, mm

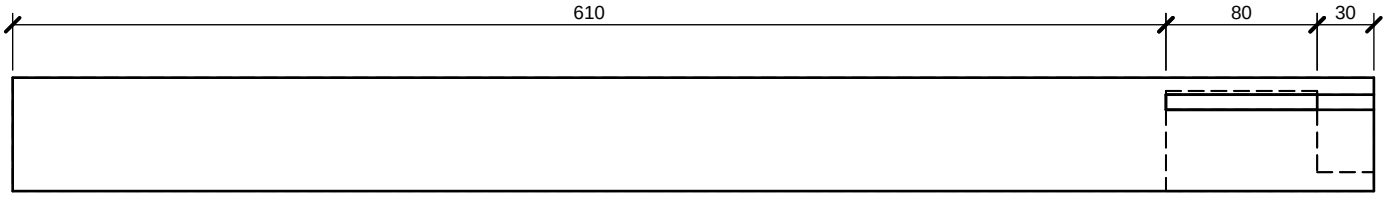


BACK EDGE

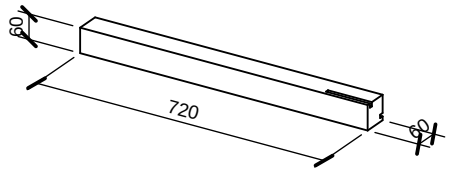

ISOMETRIC

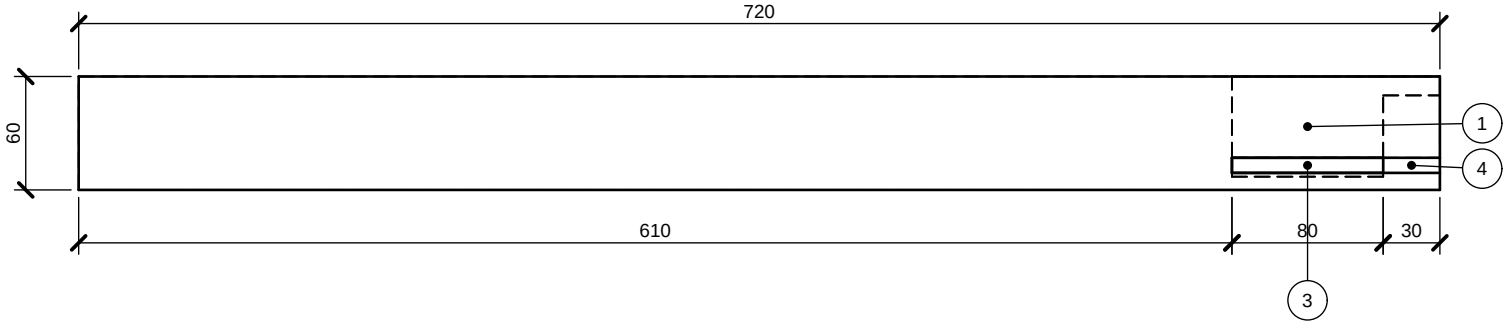


TOP FACE




TOP FACE: 1, 3, 4 1:2




FRONT EDGE



RIGHT END 1:2.5



BACK EDGE: 1, 2 1:2



FRONT EDGE: 3 1:2

4 pieces: leg_front_left, leg_front_right, leg_back_right, leg_back_left


1 mortise 80 x 8 mm, 53 deep, in back_edge

2 haunch mortise 30 x 8 mm, 10 deep, in back_edge at right_end


3 mortise 80 x 8 mm, 53 deep, in top_face

4 haunch mortise 30 x 8 mm, 10 deep, in top_face at right_end


part	**leg**
of	table
make	4
cut size	720 x 60 x 60
material	oak
scale	1:4, mm




TOP FACE: 1 1:4

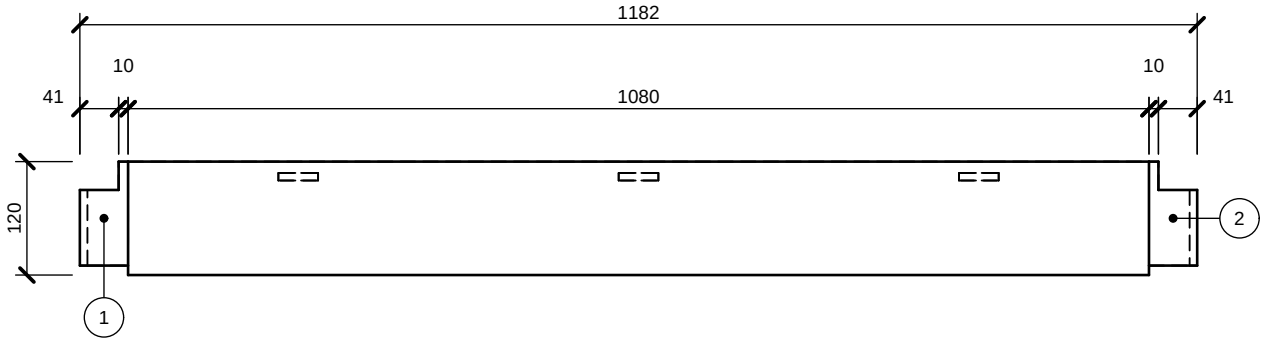


TOP FACE




TOP FACE: 2 1:4




LEFT END 1:5

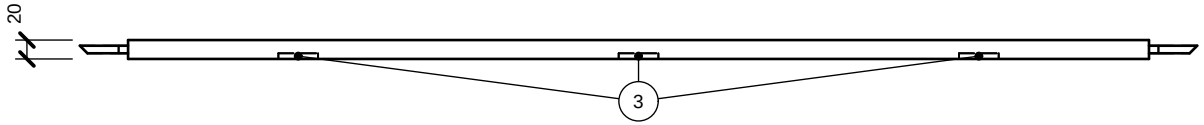


FRONT EDGE




RIGHT END 1:5




FRONT EDGE: 3 1:2.5

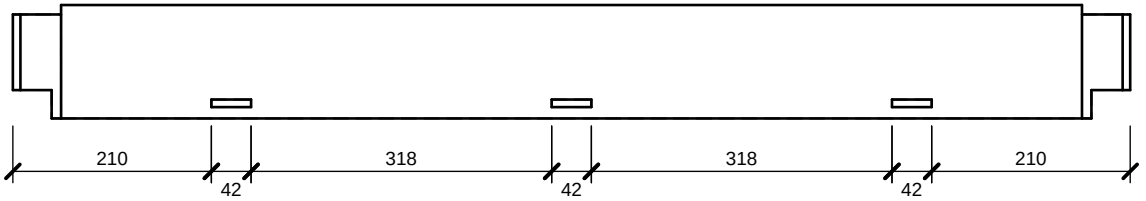

BOTTOM FACE

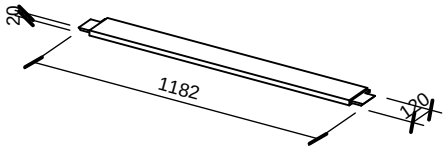

ISOMETRIC



BOTTOM FACE: 3 1:4


2 pieces: apron_front, apron_back

1 haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on left_end


2 haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on right_end

3 3 x mortise 42 x 8 mm, 6 deep, in bottom_face


part	**apron_front_back**
of	table
make	2
cut size	1182 x 120 x 20
material	oak
scale	1:8, mm




LEFT END: 1 1:1

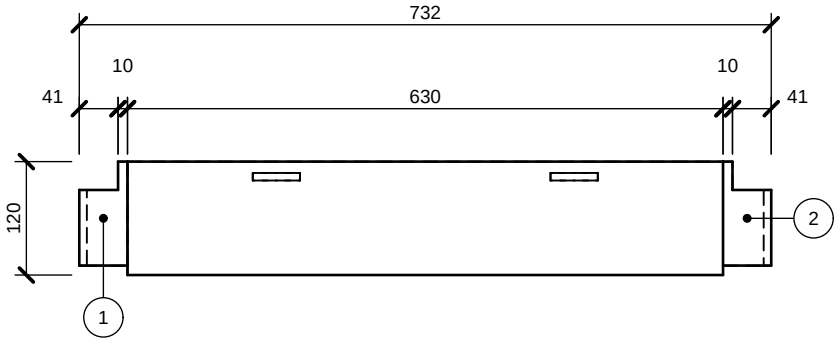


TOP FACE

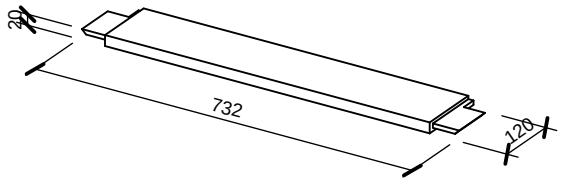


ISOMETRIC

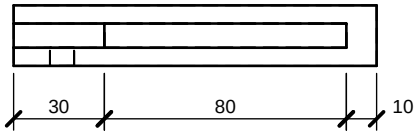


LEFT END 1:2.5




FRONT EDGE




RIGHT END 1:2.5




TOP FACE: 1 1:2




FRONT EDGE: 3 1:1

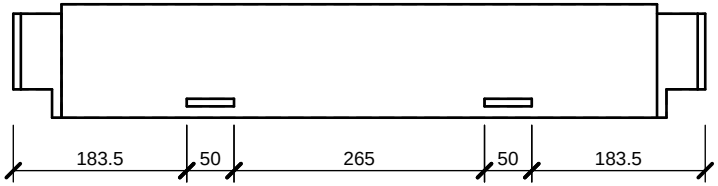


BOTTOM FACE



RIGHT END: 2 1:1



TOP FACE: 2 1:2



BOTTOM FACE: 3 1:2


2 pieces: apron_right, apron_left

1 haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on left_end


2 haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on right_end

3 2 x mortise 50 x 8 mm, 6 deep, in bottom_face


part	**apron_right_left**
of	table
make	2
cut size	732 x 120 x 20
material	oak
scale	1:8, mm

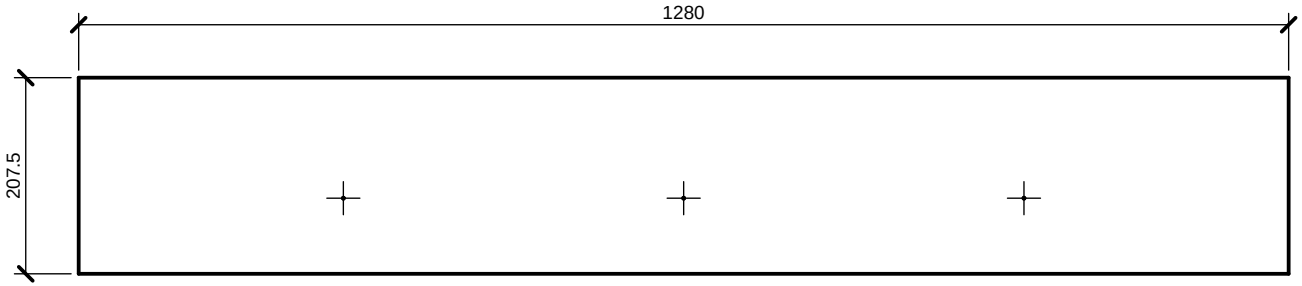


TOP FACE

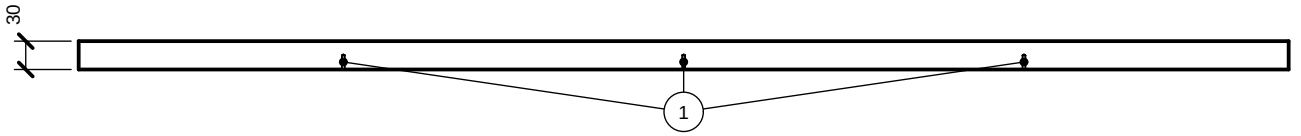


FRONT EDGE

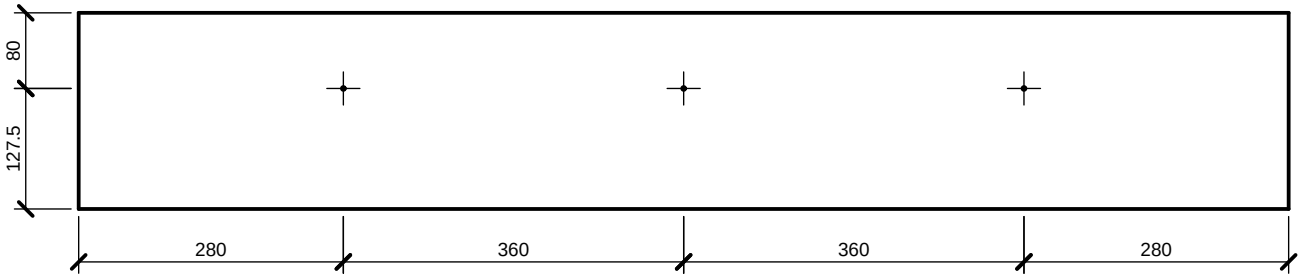

BOTTOM FACE

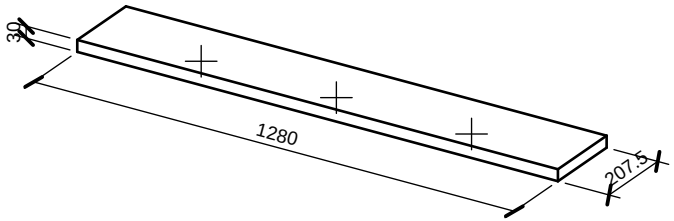

ISOMETRIC




FRONT EDGE: 1 1:1


part	**top_1_4**
of	table
make	2
cut size	1280 x 207.5 x 30
material	oak
scale	1:8, mm

2 pieces: top_1, top_4


1 3 x pilot hole ø3, 15 deep, drill point 118 deg, in bottom_face, for a 4 x 35 screw

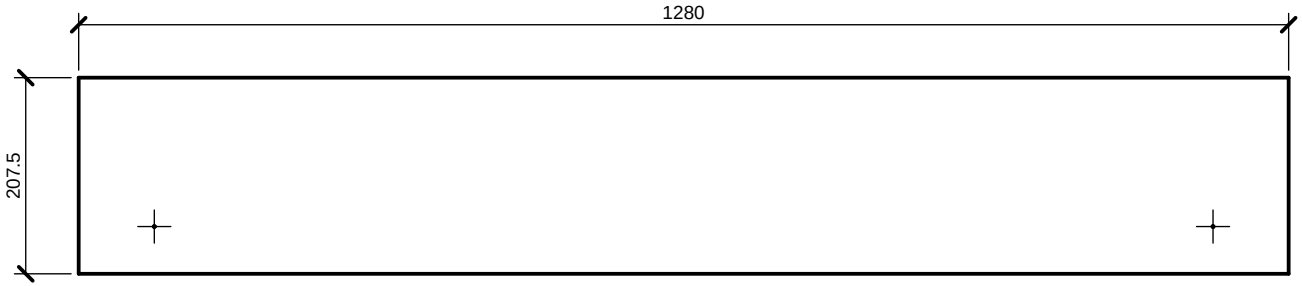


TOP FACE

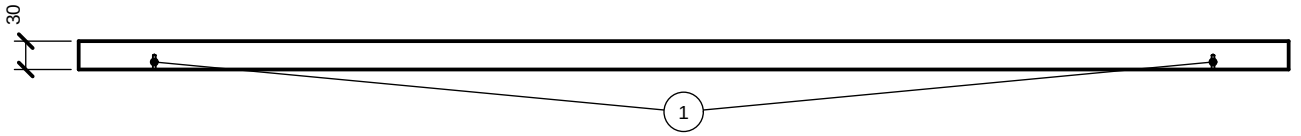


FRONT EDGE

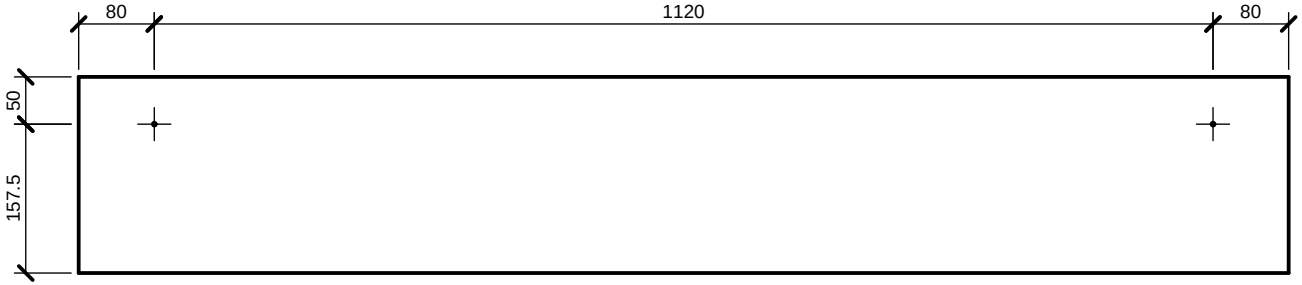

BOTTOM FACE

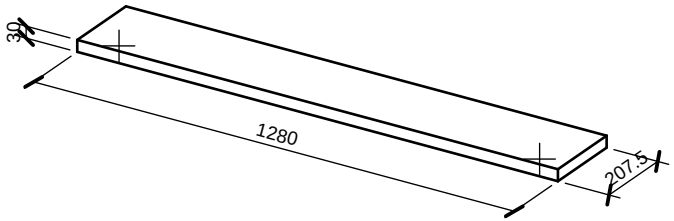

ISOMETRIC




FRONT EDGE: 1 1:1


part	**top_2_3**
of	table
make	2
cut size	1280 x 207.5 x 30
material	oak
scale	1:8, mm

2 pieces: top_2, top_3


1 2 x pilot hole ø3, 15 deep, drill point 118 deg, in bottom_face, for a 4 x 35 screw




TOP FACE

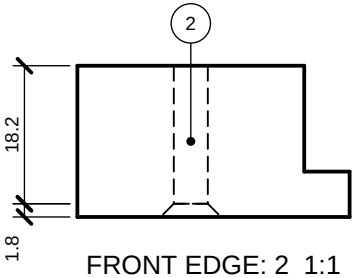


FRONT EDGE: 2 1:1




FRONT EDGE

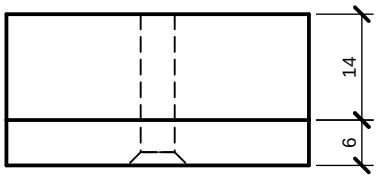

RIGHT END 1:1



BOTTOM FACE

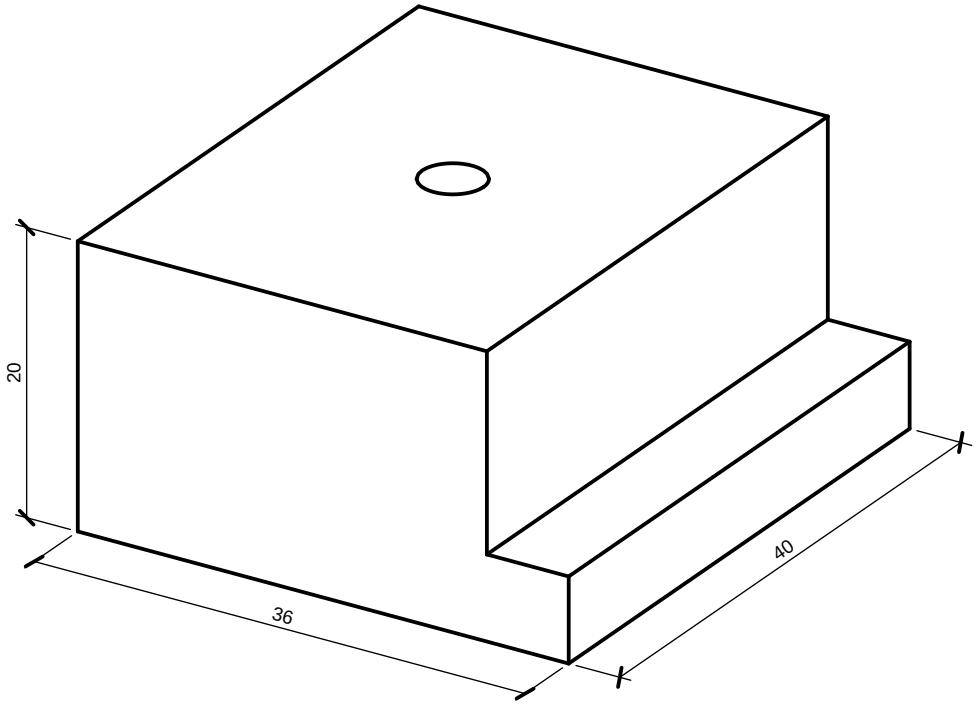

ISOMETRIC

10 pieces: button_front_1, button_front_2, button_front_3, button_right_1, button_right_2, button_back_1, button_back_2, button_back_3, button_left_1, button_left_2

1 end rabbet 6 mm, 14 deep, in top_face at right_end

2 clearance hole ø4.5, countersunk ø8, 90 deg, in bottom_face, for a 4 x 35 screw

part	**button**
of	table
make	10
cut size	36 x 40 x 20
material	oak
scale	1:2, mm

Cut list

leg	720 x 60 x 60 mm oak, 4 pieces: leg_front_left, leg_front_right, leg_back_right, leg_back_left - mortise 80 x 8 mm, 53 deep, in back_edge - haunch mortise 30 x 8 mm, 10 deep, in back_edge at right_end - mortise 80 x 8 mm, 53 deep, in top_face - haunch mortise 30 x 8 mm, 10 deep, in top_face at right_end
apron_front_back	1182 x 120 x 20 mm oak, 2 pieces: apron_front, apron_back - haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on left_end - haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on right_end - 3 x mortise 42 x 8 mm, 6 deep, in bottom_face
apron_right_left	732 x 120 x 20 mm oak, 2 pieces: apron_right, apron_left - haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on left_end - haunched tenon 80 x 8 mm, 51 long, haunch 10 long, end mitred 45 deg towards bottom_face, on right_end - 2 x mortise 50 x 8 mm, 6 deep, in bottom_face
top_1_4	1280 x 207.5 x 30 mm oak, 2 pieces: top_1, top_4 - 3 x pilot hole ø3, 15 deep, drill point 118 deg, in bottom_face, 280 and 1000 from left_end, centered; 80 from front_edge, for a 4 x 35 screw
top_2_3	1280 x 207.5 x 30 mm oak, 2 pieces: top_2, top_3 - 2 x pilot hole ø3, 15 deep, drill point 118 deg, in bottom_face, 80 and 1200 from left_end; 50 from front_edge, for a 4 x 35 screw
button	36 x 40 x 20 mm oak, 10 pieces: button_front_1, button_front_2, button_front_3, button_right_1, button_right_2, button_back_1, button_back_2, button_back_3, button_left_1, button_left_2 - end rabbet 6 mm, 14 deep, in top_face at right_end - clearance hole ø4.5, countersunk ø8, 90 deg, in bottom_face, centered, for a 4 x 35 screw

Appendix: source

Made with woodwright 0.7.0, build123d 0.13.0, Python 3.14.8.

To make these plans again:

```
  uvx --python 3.14 woodwright==0.7.0 export projects.table
```

projects.table, in woodwright/examples/projects.py

```
def table(
    width: float = 1200,
    depth: float = 750,
    height: float = 750,
    overhang: float = 40,
    apron_width: float = 120,
    setback: float = 3,
    top_boards: int = 4,
    buttons: tuple[int, int] = (3, 2),
    leg_stock: Stock = TABLE_LEG_STOCK,
    stock: Stock = OAK,
    top_stock: Stock = THICK_OAK,
) -> Assembly:
    """A table: legs and wide aprons, a solid top held down by buttons; outside sizes.

    `width` and `depth` are those of the frame, the top overhangs it by
    `overhang`. The aprons are wide, so their tenons are set down from the
    top of the legs, with haunches filling the wide shoulders: the legs
    keep their tops whole, and the aprons can't twist. The top is glued up
    from `top_boards` boards edge to edge, its grain from side to side. It
    is not glued to the frame: wooden buttons screwed to its underside have
    tongues in short mortises in the inside of the aprons (`buttons` along
    the front and back, and along the sides), so it can move across its
    grain: in and out of the mortises at the front and back, along them at
    the sides, where they are longer.
    """
    asm = Assembly("table", root_location=STANDING, description=TABLE_DESCRIPTION)
    _, aprons = _table_frame(
        asm,
        width,
```

```
    depth,
    height - top_stock.thickness,
    apron_width,
    setback,
    leg_stock,
    stock,
    shoulder=(10, 30),
    haunch_length=10,
)
top = _glued_top(
    asm,
    aprons[0],
    "top",
    width,
    depth,
    overhang,
    overhang,
    top_boards,
    leg_stock,
    setback,
    top_stock,
)
_buttons(asm, aprons, buttons, stock, top, overhang)
return asm
```