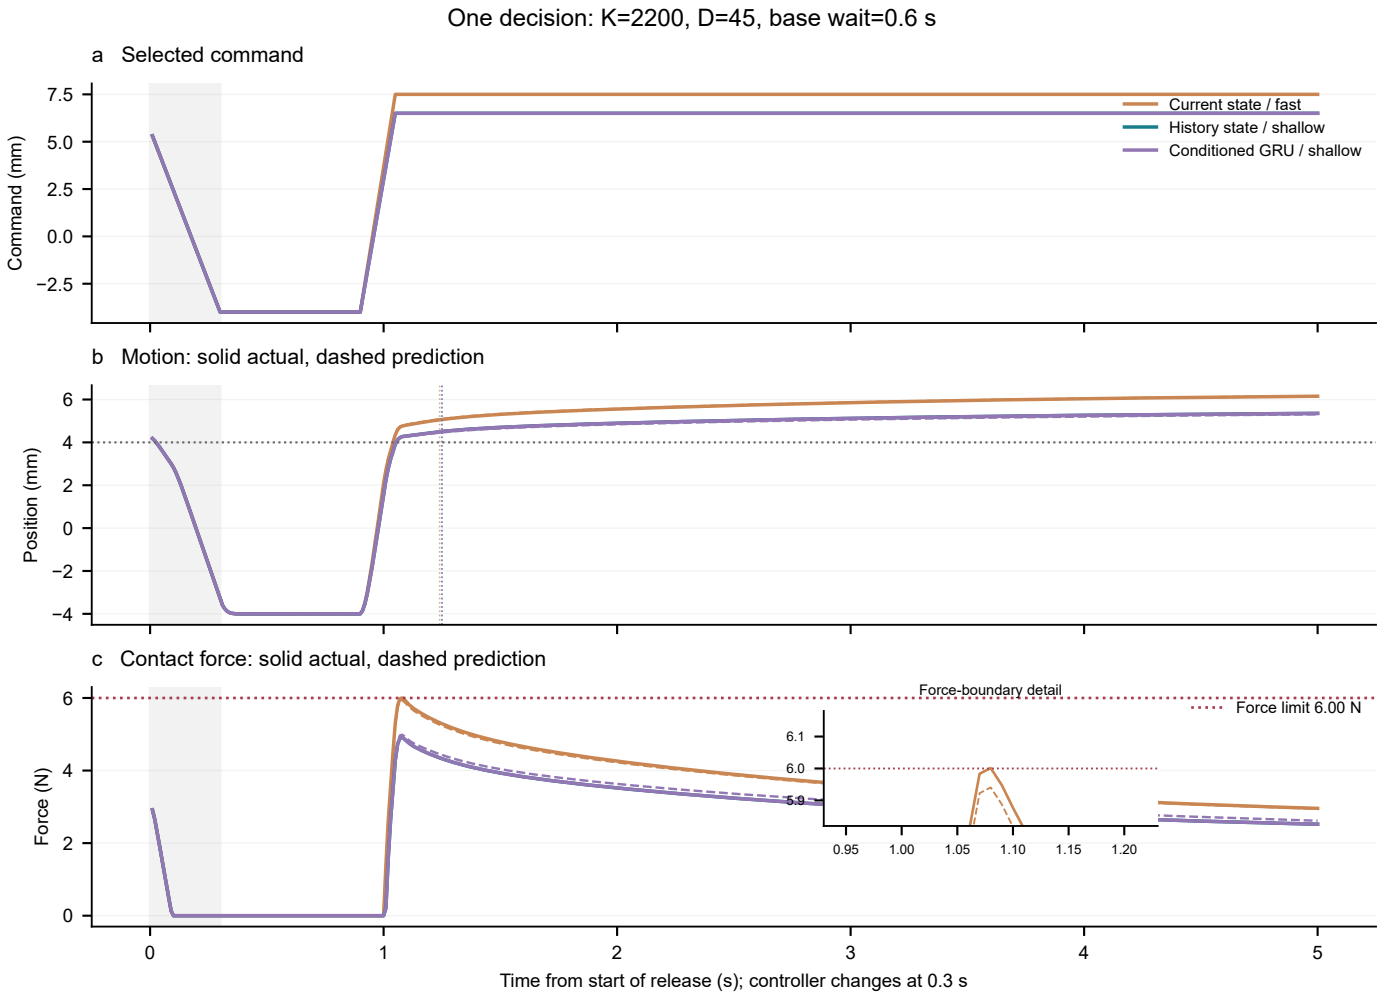
One decision: K=2200, D=45, base wait=0.6 s
a Selected command
Command (mm)
7.5
5.0
2.5
0.0
−2.5
Current state / fast
History state / shallow
Conditioned GRU / shallow
b Motion: solid actual, dashed prediction
Position (mm)
6
4
2
0
−2
−4
c Contact force: solid actual, dashed prediction
Force (N)
6
4
2
0
Force-boundary detail
Force limit 6.00 N
6.1
6.0
5.9
0.95
1.00
1.05
1.10
1.15
1.20
0
1
2
3
4
5
Time from start of release (s); controller changes at 0.3 s