

Preselected case 1: pair 0, member 0 | K=4800, D=45, wait=0.1 s, cap=5.5 N
Solid = actual; dotted force = next-10-ms forecast of the command already selected


Frozen encoding context: the original 301 samples, used exactly once

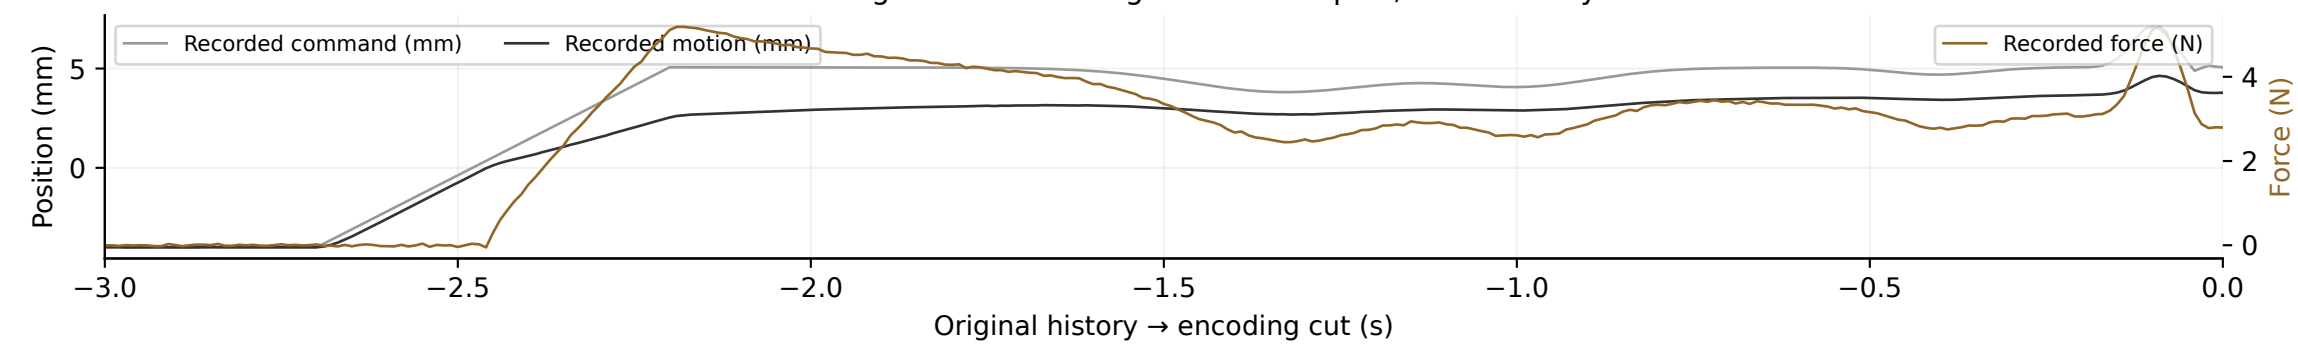


A Command (dashed) and actual motion (solid)

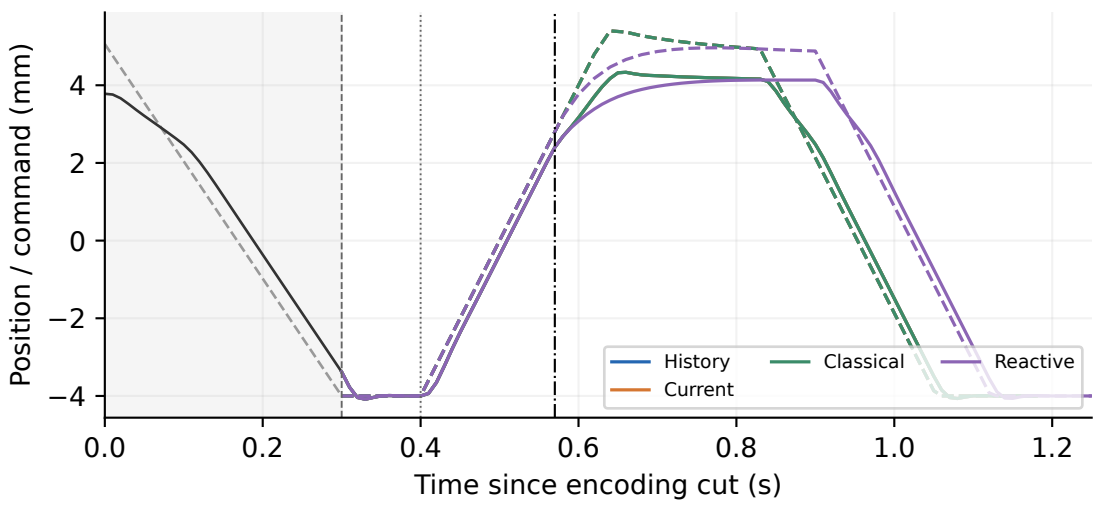


B Force and selected-command forecast

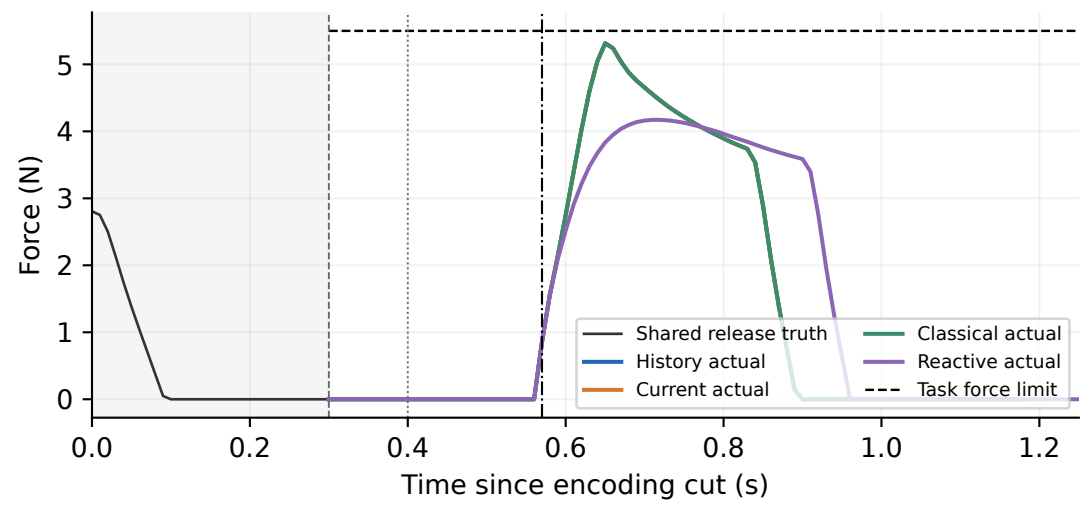


C Fast-mode state error

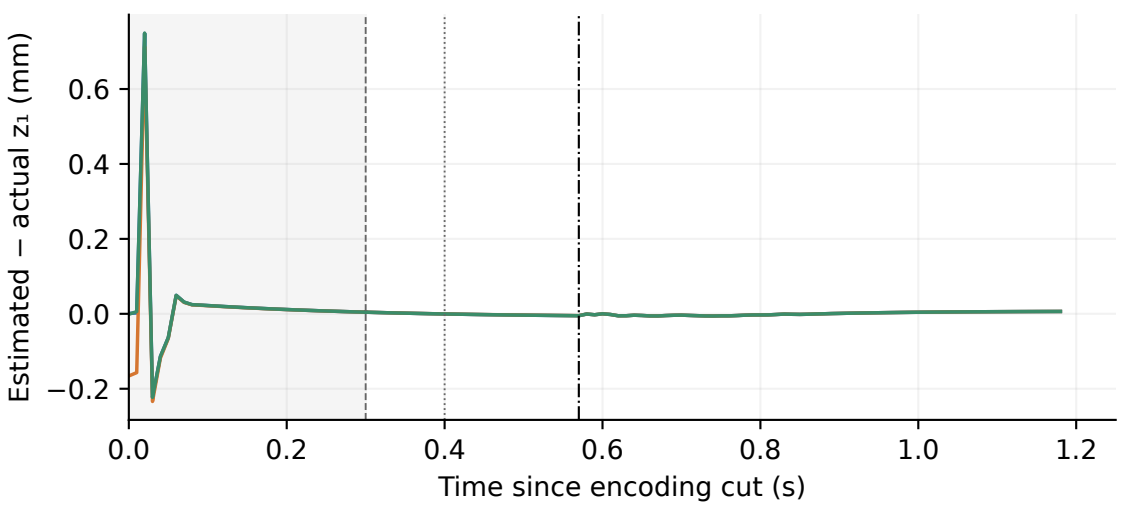

D Slow-mode state error

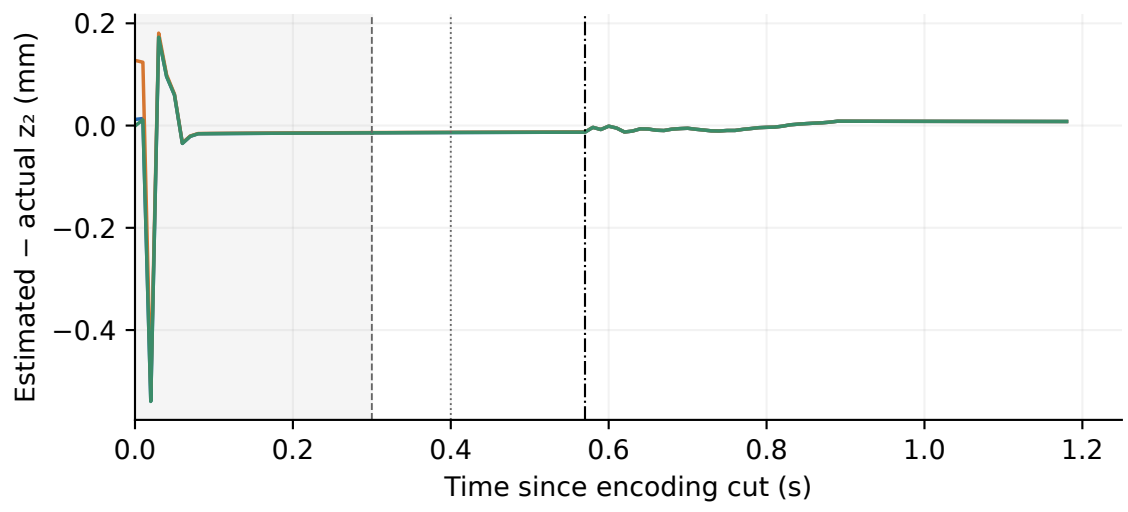

E Online state correction in force units

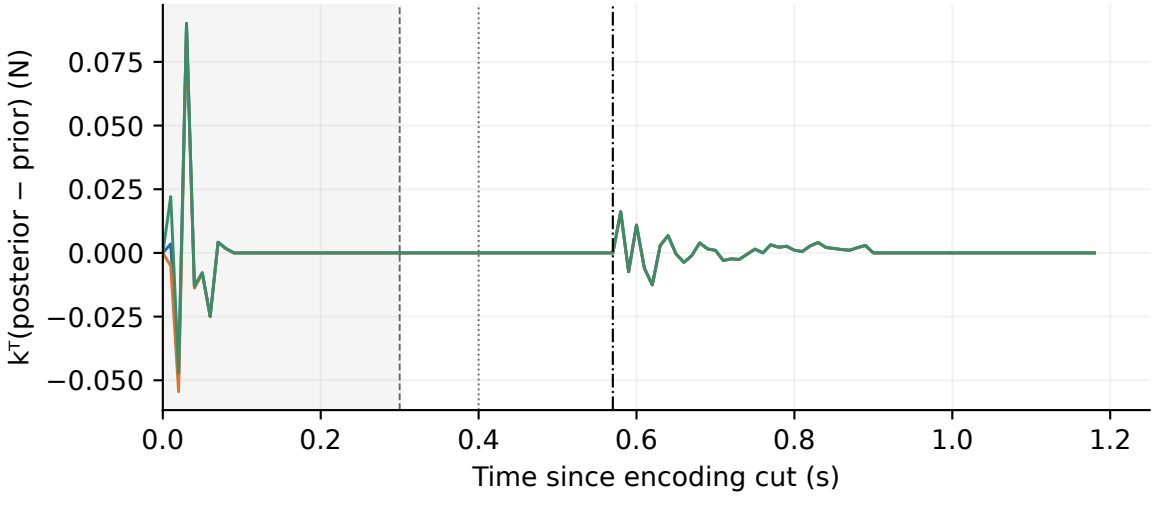

F Selected command velocity

