



5V AND 3V3 POWER SUPPLY

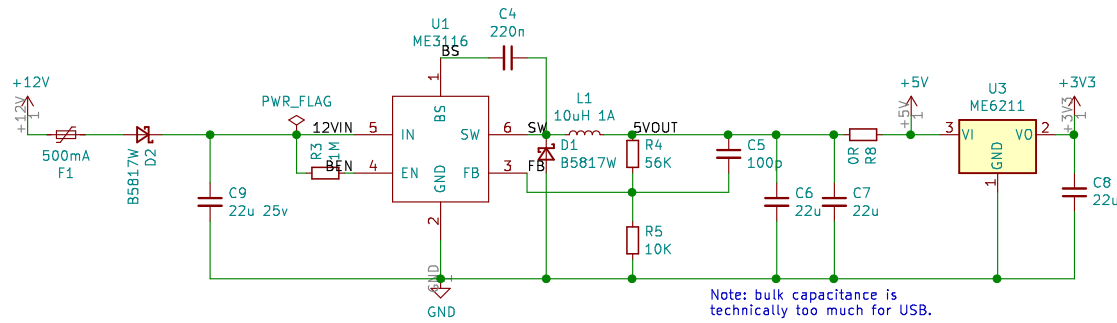


Note: bulk capacitance is technically too much for USB.

USB CONTROLLER

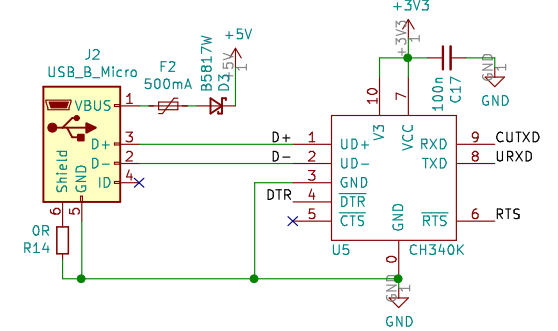


ESP8285 MICROCONTROLLER


4.3nH inductor is optional, sub a 0R 0603 resistor.

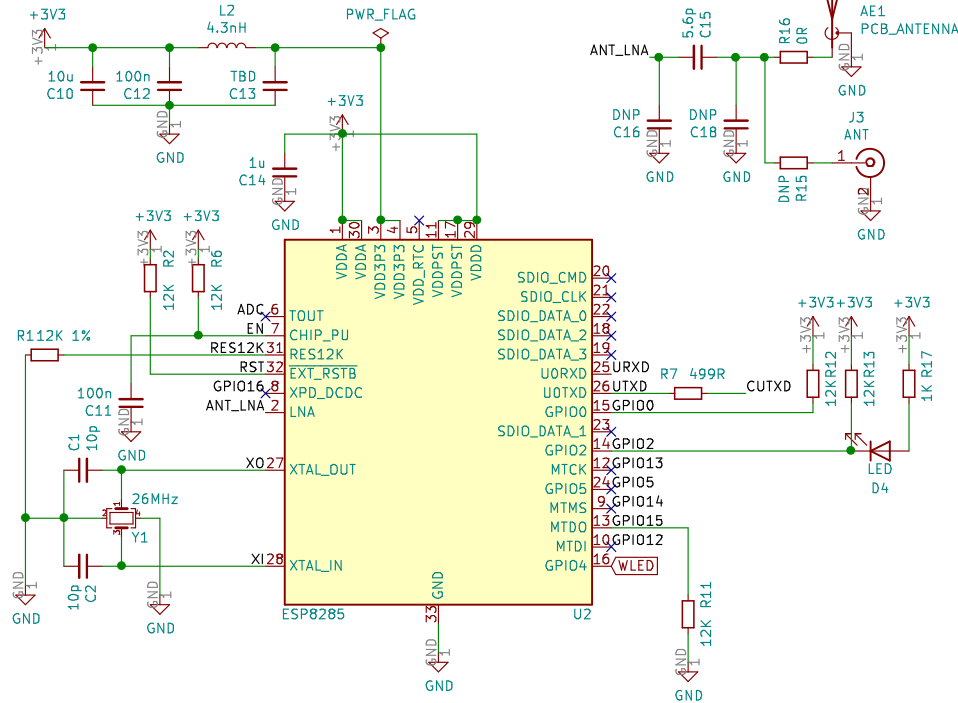

PROGRAMMING AND BUTTONS

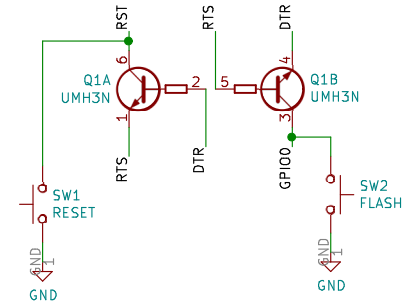

WLED CONTROL

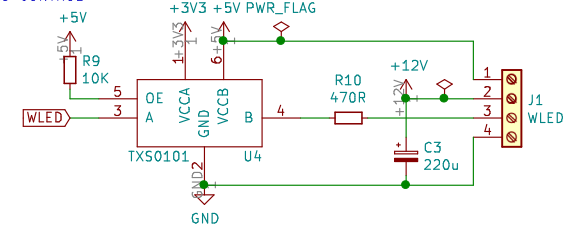

Sheet: /
File: ESP8285-WLED.sch

Title:

Size: A4 Date:
KiCad E.D.A. kicad 5.1.10-88a1d61d5888ubuntu20.04.1

Rev:
Id: 1/1