




MAINS POWER

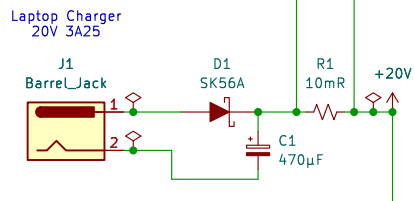


POWER SECTION

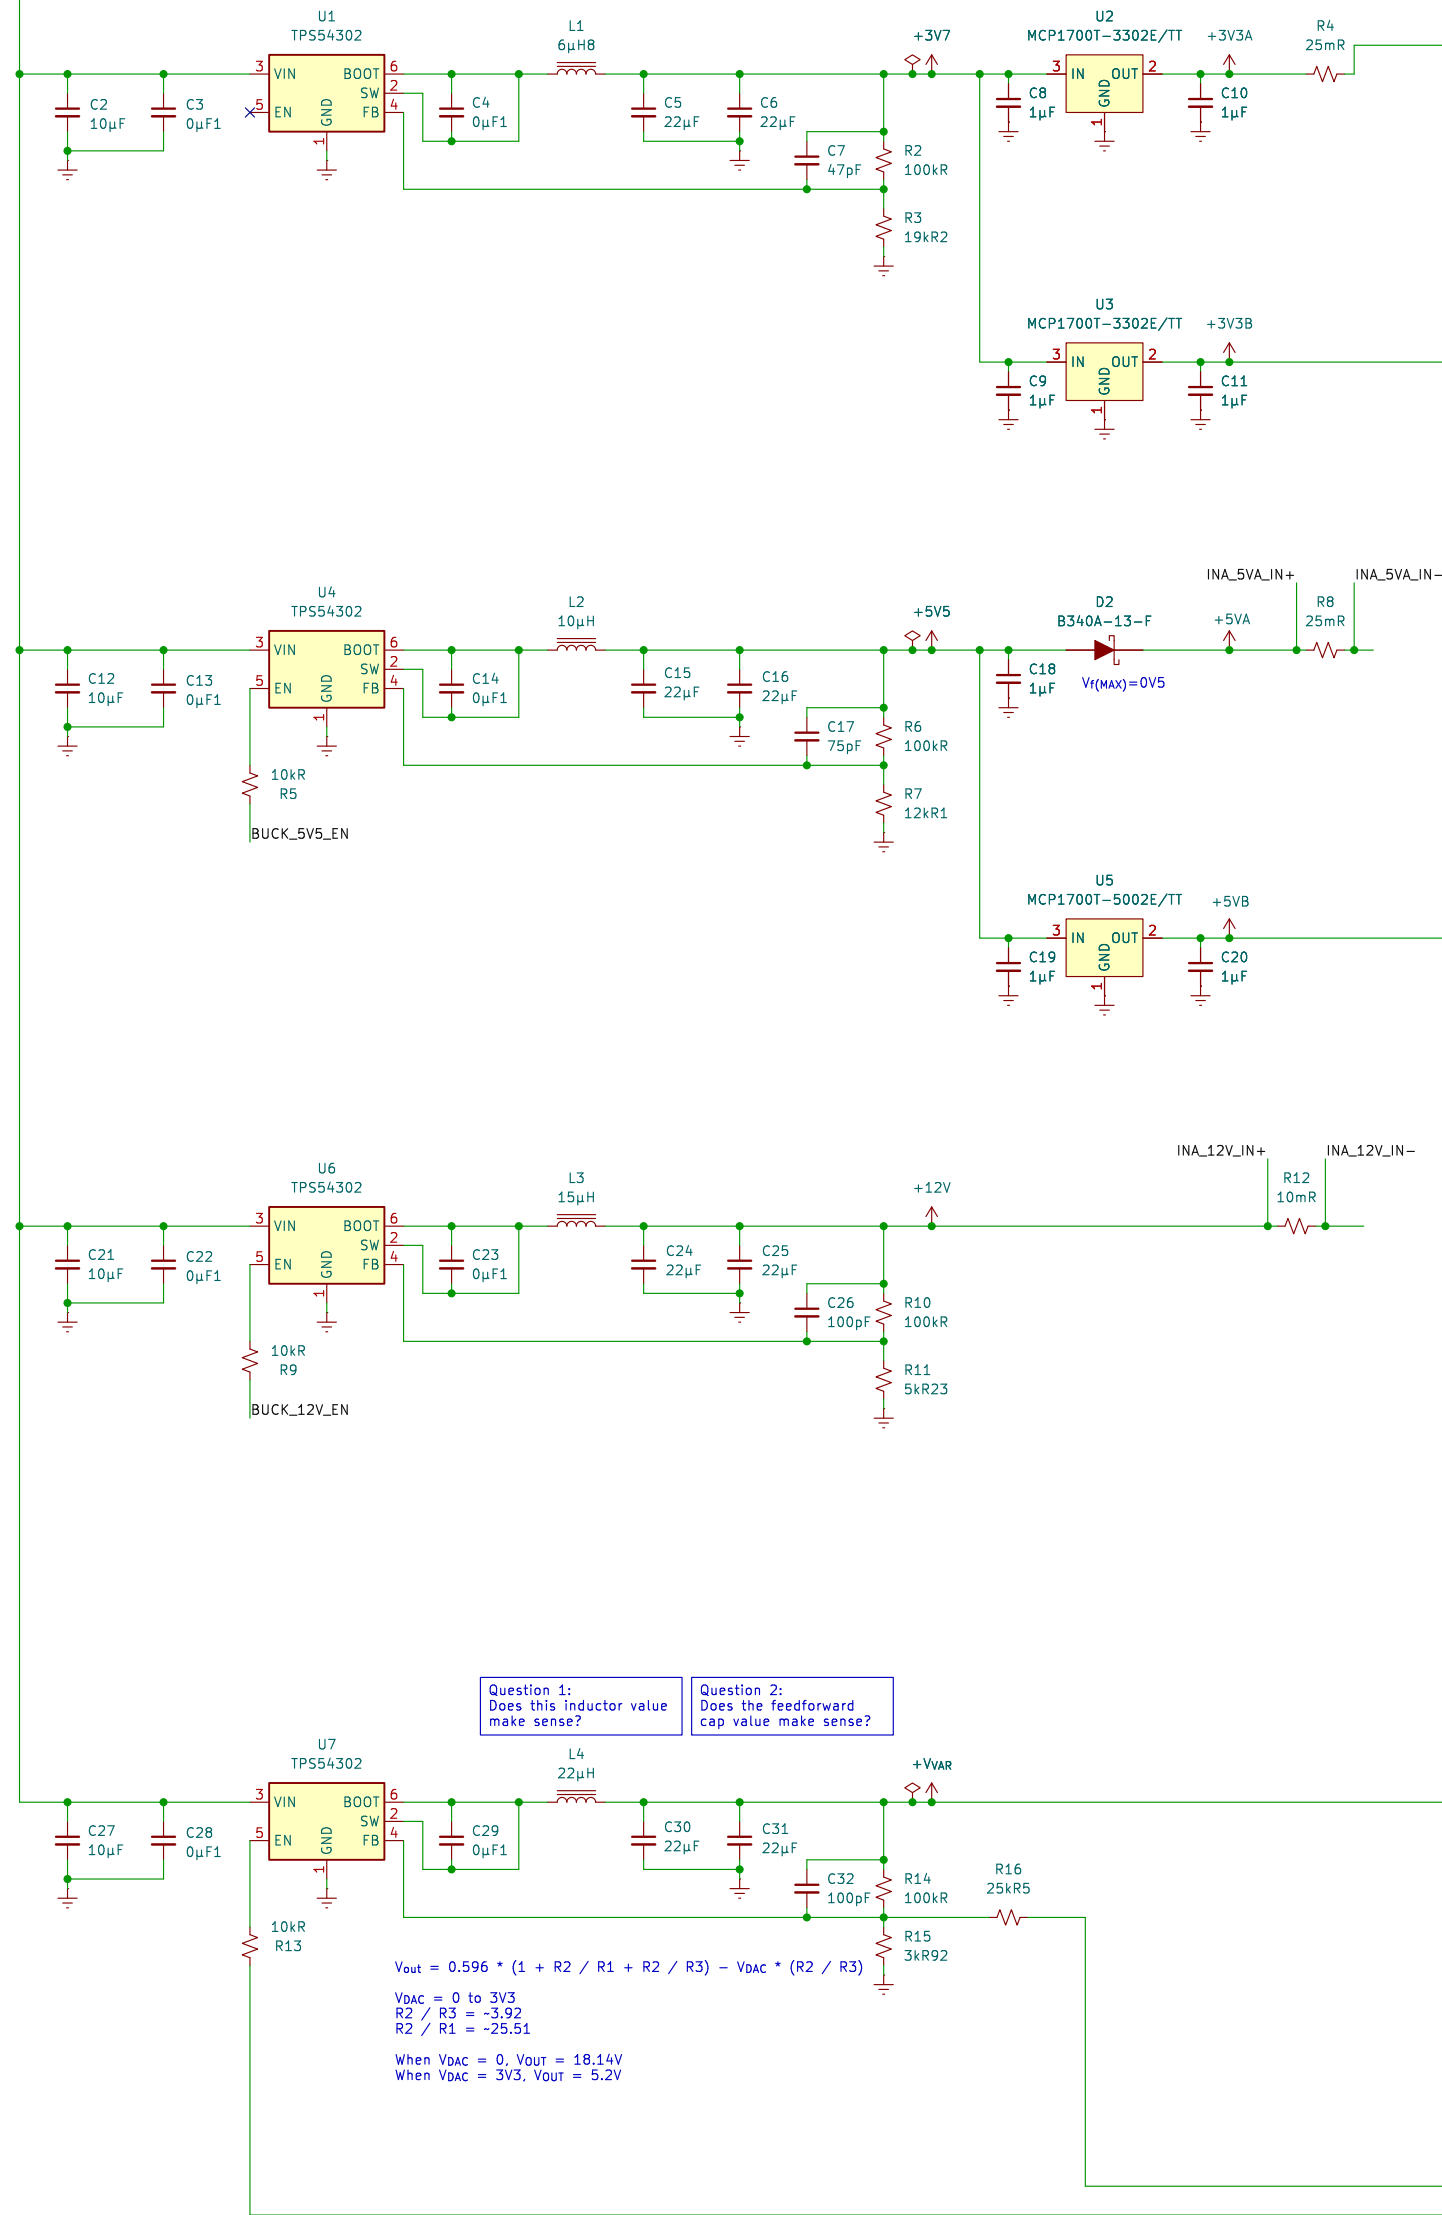

SWITCHES & LOADS

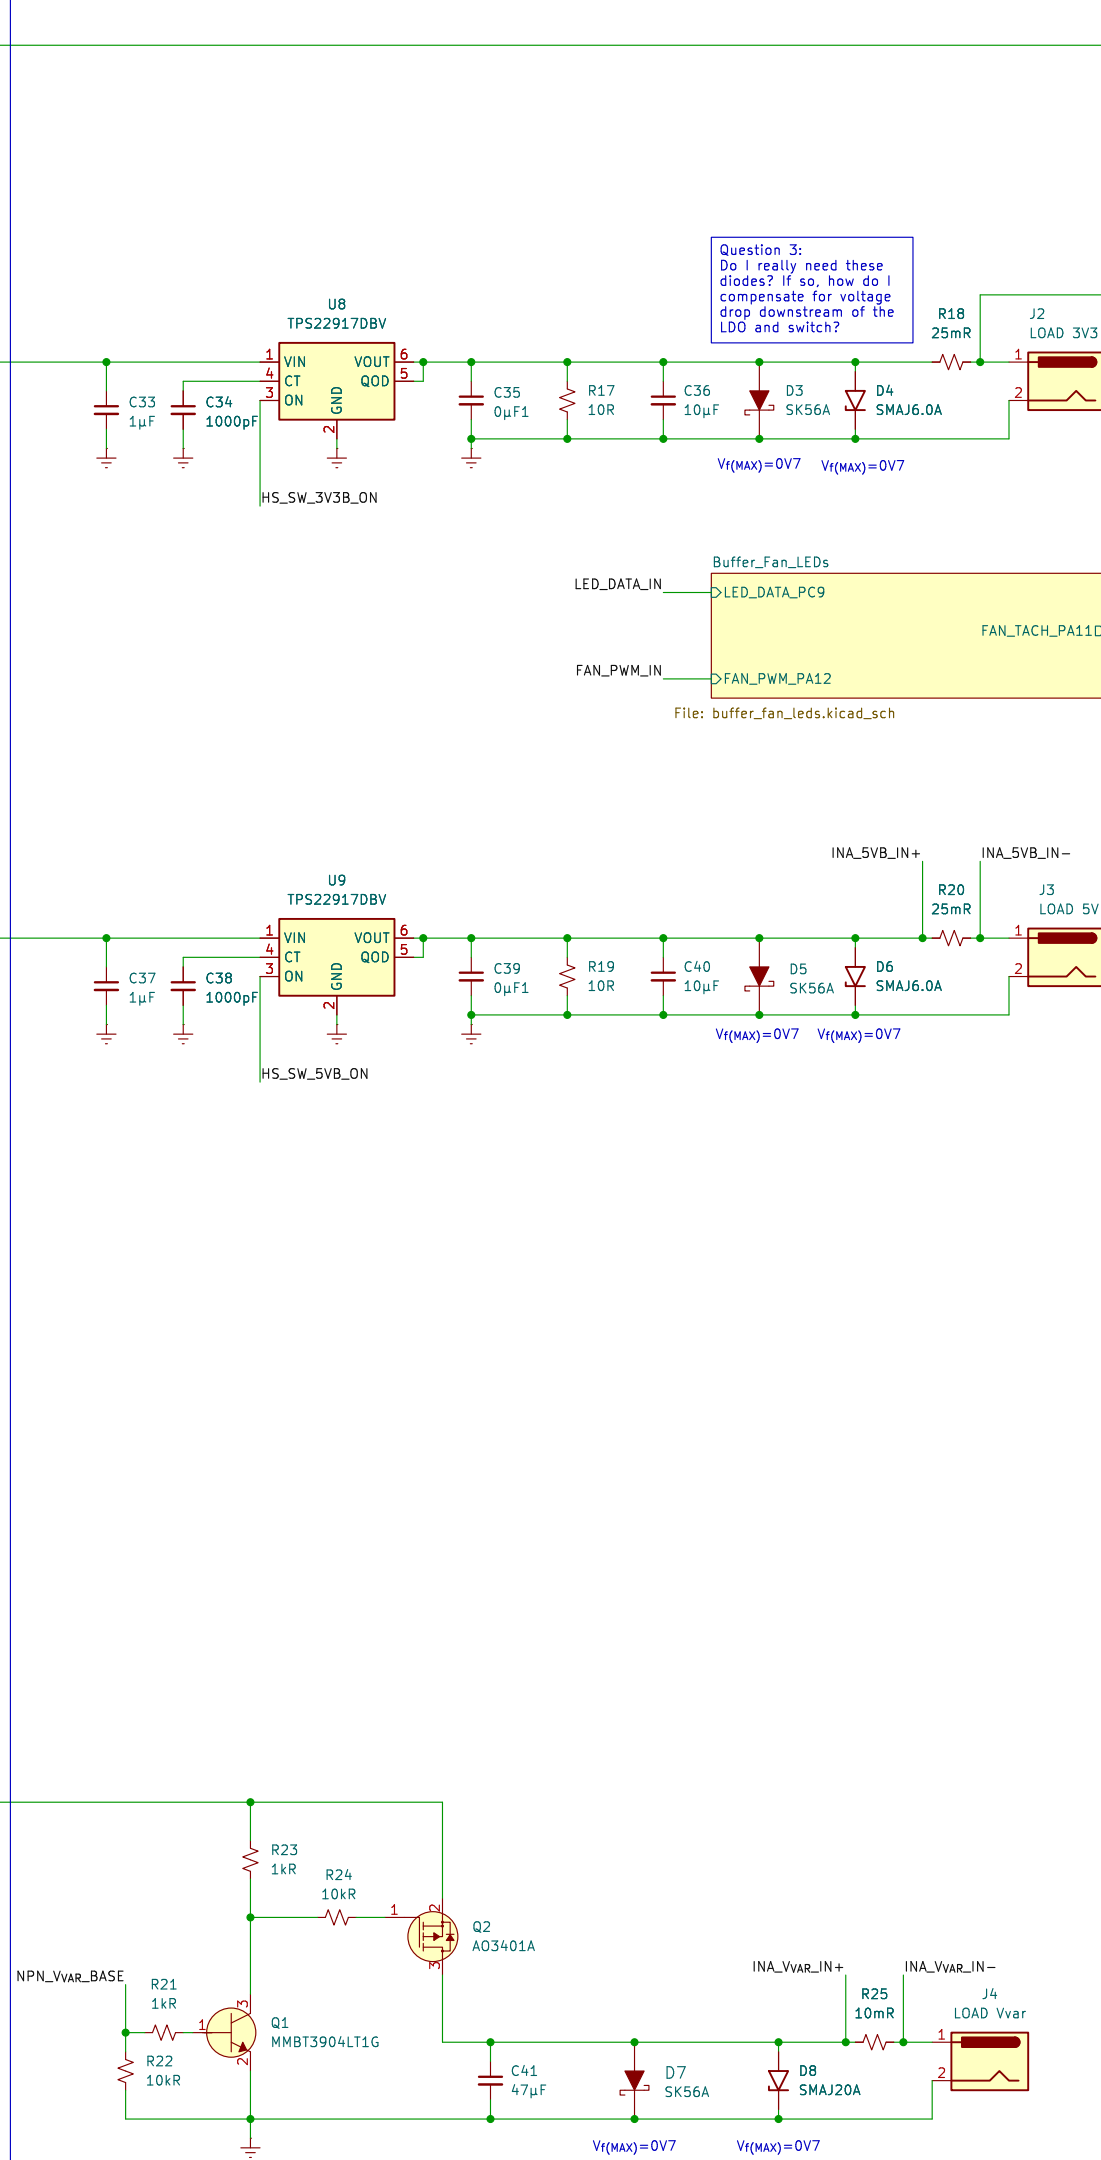


Current_Sensors

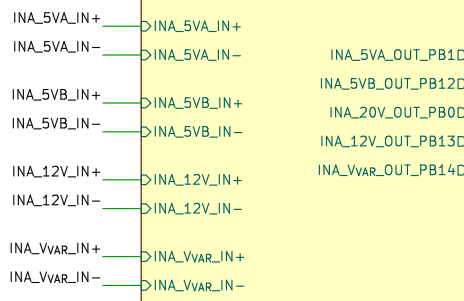


Microcontroller

No pull-up resistors included for I2C because the OLED and SHT31s are modules with built-in resistors. May need to alter modules or remove the resistors.


OLED DISPLAYS

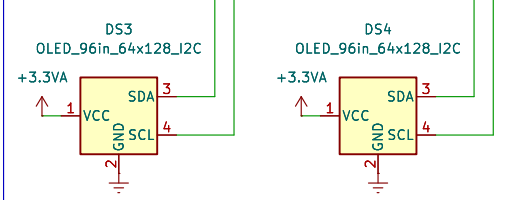

TEMPERATURE SENSORS

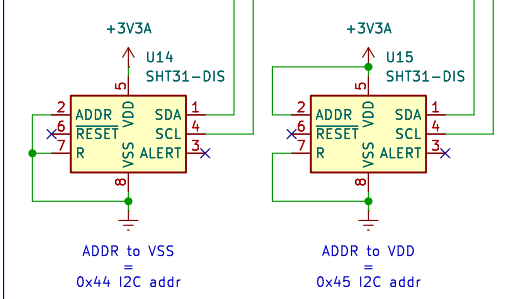

USER INTERFACES

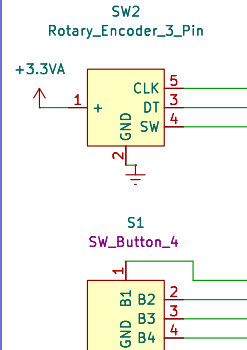

Sheet: /

File: power_supply_v2.kicad_sch

Title: Digital Variable DC Bench Power Supply

Size: A2 Date: 2026-04-27


KiCad E.D.A. 9.0.9-rc1

Rev: 1

Id: 1/4


MICROCONTROLLER

Pin assignment is not optimized
or based on any physical layout currently.

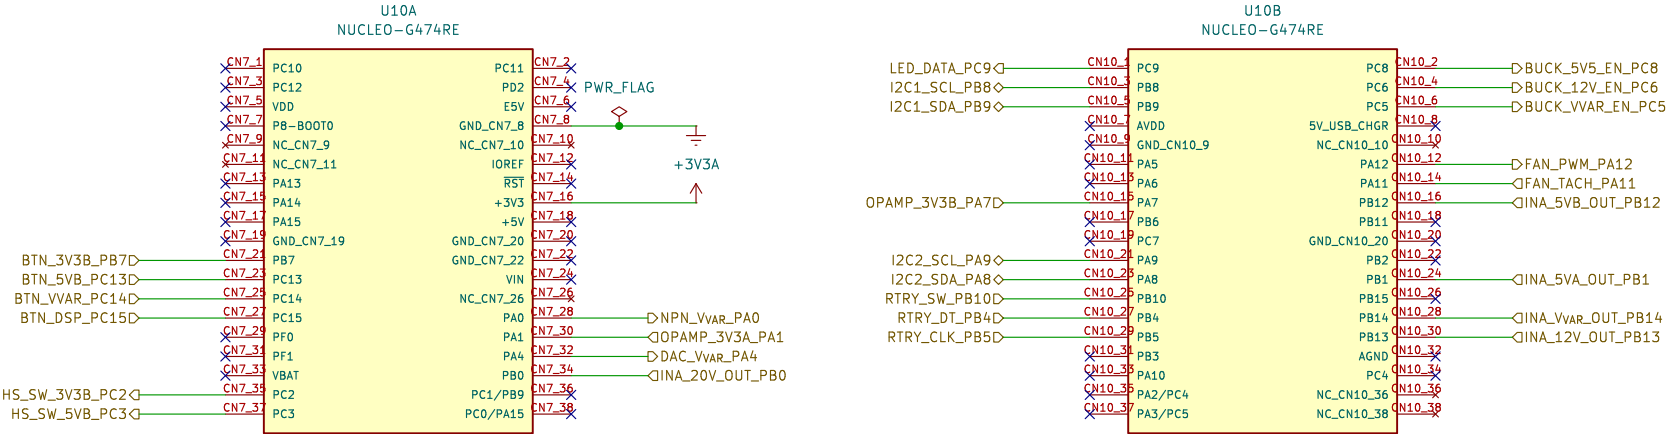

VOLTAGE BUFFER + FAN & LEDs

Question 4:
Datasheet says when OE is low, output is enabled. Is there any reason I shouldn't just use a pull-down to keep them enabled since the signal is controlled by the MCU?

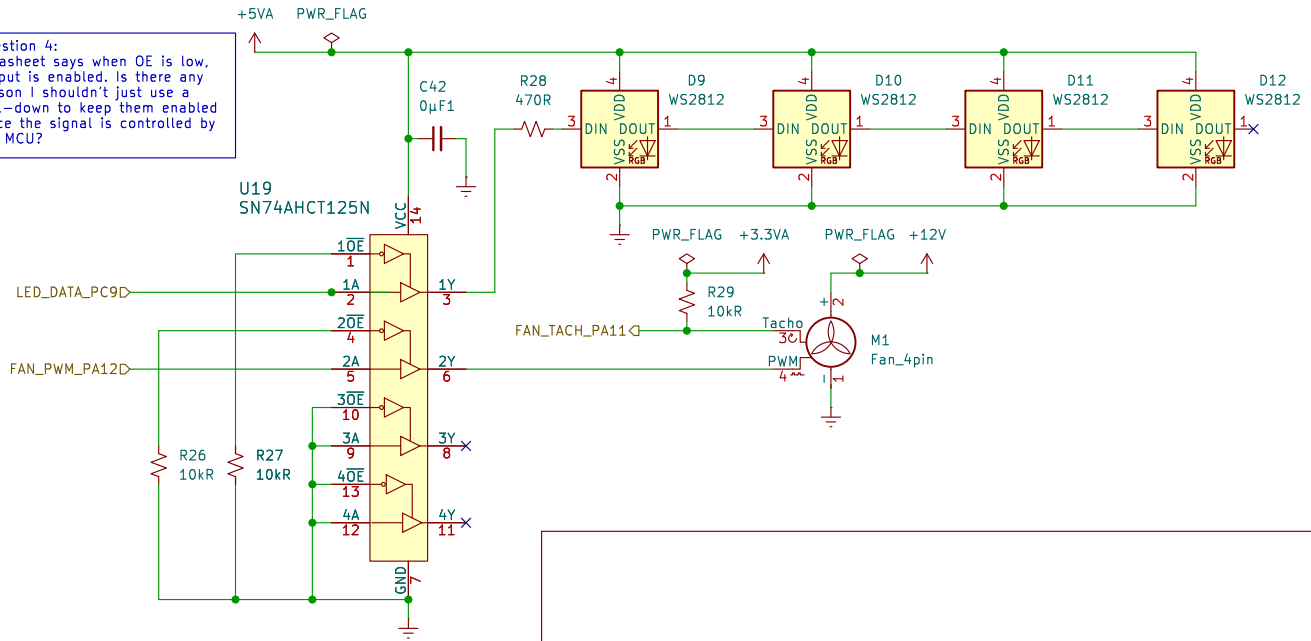

Sheet: /Buffer_Fan_LEDs/

File: buffer_fan_leds.kicad_sch

Title: Digital Variable DC Bench Power Supply

Size: A5






Date: 2026-04-27

Rev: 1

KiCad E.D.A. 9.0.9-rc1

Id: 3/4

CURRENT SENSORS

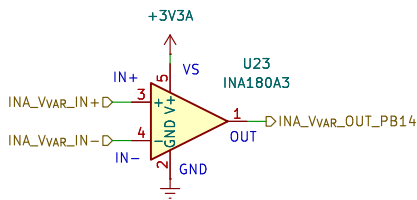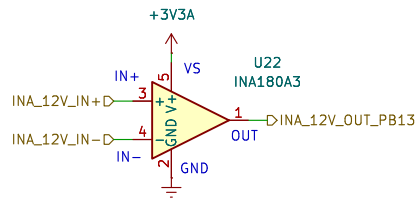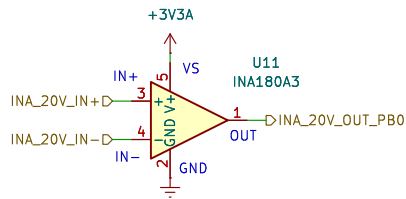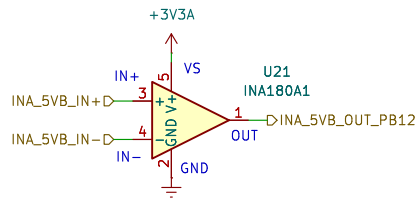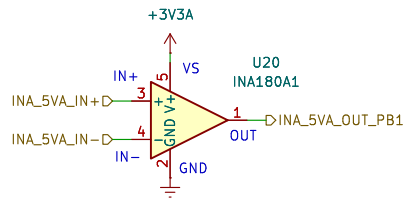

Sheet: /Current_Sensors/ File: current_sensors.kicad_sch		
Title: Digital Variable DC Bench Power Supply		
Size: A5	Date: 2026-04-27	Rev: 1
KiCad E.D.A. 9.0.9-rc1	Id: 4/4	