

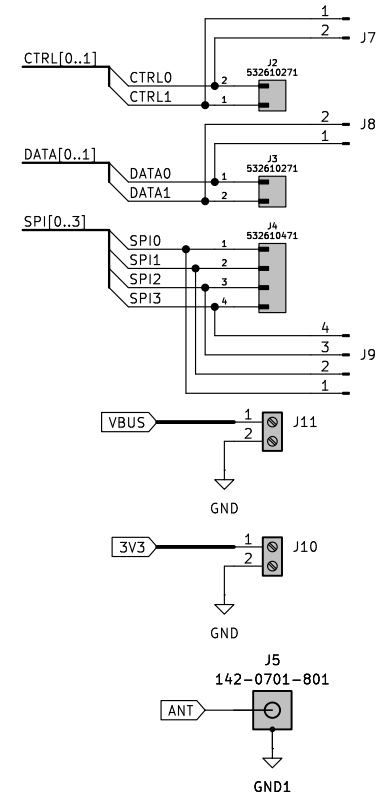


Version	Modifications	Authors
v0.0	Creation of the prototype board for the testing the LR-FHSS	Carlos A. P. Freitas, João C. E. Barcellos

The diagram shows a circuit for a USB-to-serial converter module. It includes a USB connector (J6) with pins 1, 2, 3, and 4. Pin 1 is connected to GND. Pin 2 is connected to the VIN of the LM2596S-5 voltage regulator. Pin 3 is connected to the FB of the LM2596S-5. Pin 4 is connected to the VBUS. The LM2596S-5 is a step-down voltage regulator. Its output (OUT) is connected to the VBUS. The VBUS is also connected to the VCC of the ATmega328P microcontroller. The ATmega328P is connected to the RX and TX pins of the FT232RL module. The FT232RL module is connected to the RX and TX pins of the USB-to-serial converter module. The circuit also includes a 470F capacitor (C5) connected to the VIN of the LM2596S-5, a 470F capacitor (C6) connected to the VBUS, and a 5V1 diode (D2) connected to the VBUS. The components J6, U3, D2, and C6 are marked with a red 'X'.

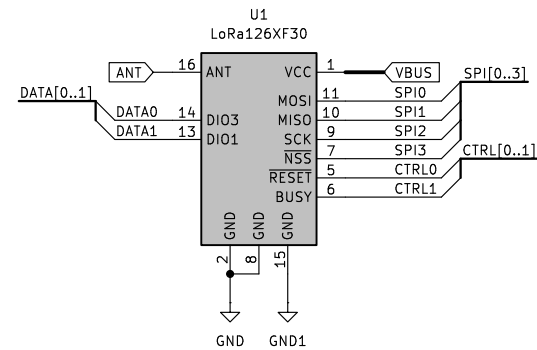

Mounting hole (3.2 mm) Mounting hole (3.2 mm) Mounting hole (3.2 mm) Mounting hole (3.2 mm)

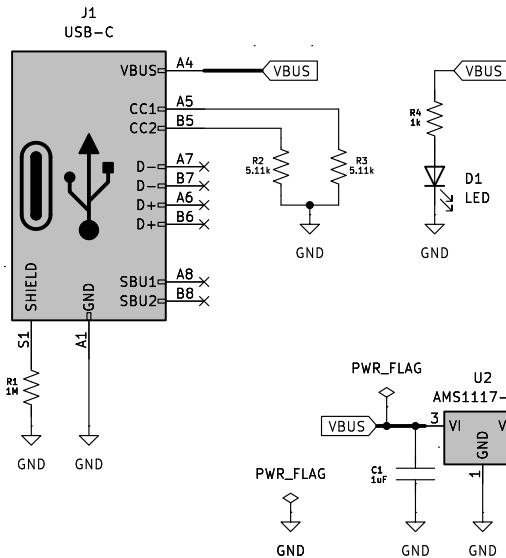

Id: 1/1