Draw the parameters, rather than the actual design.

1.)

Length

Ls The longer the length, the more segmented it becomes, allowing more angles to interact w/ the line.

2.)

Segments

3.) Push + Pull in 3 dimensions

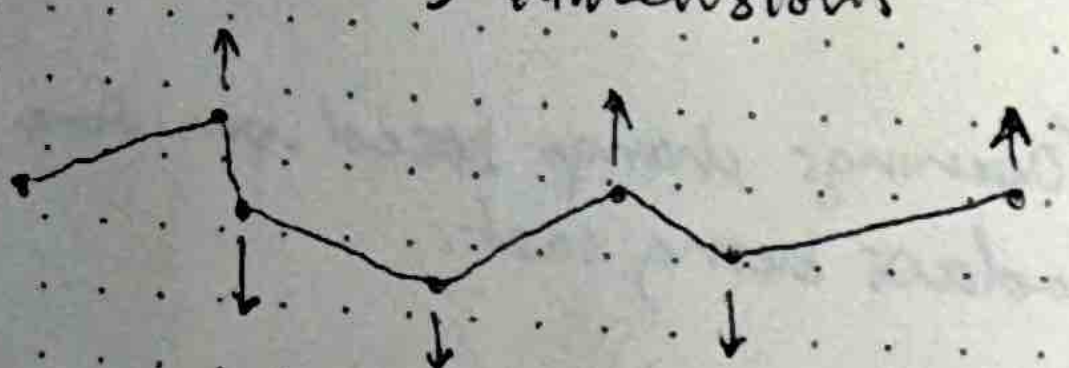

4.) Segments become planes

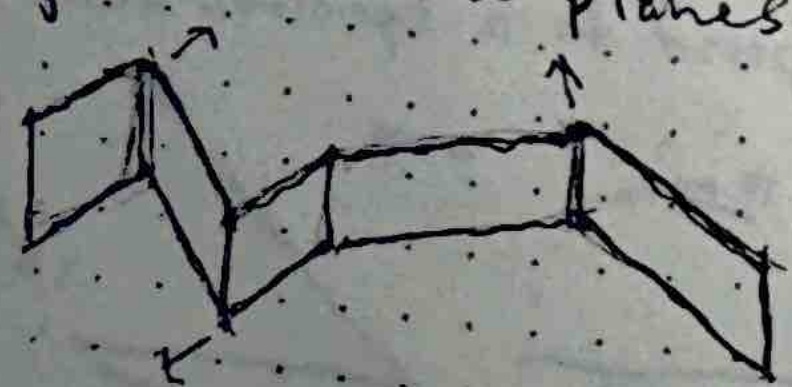



5.) Planes start to tilt + Angle



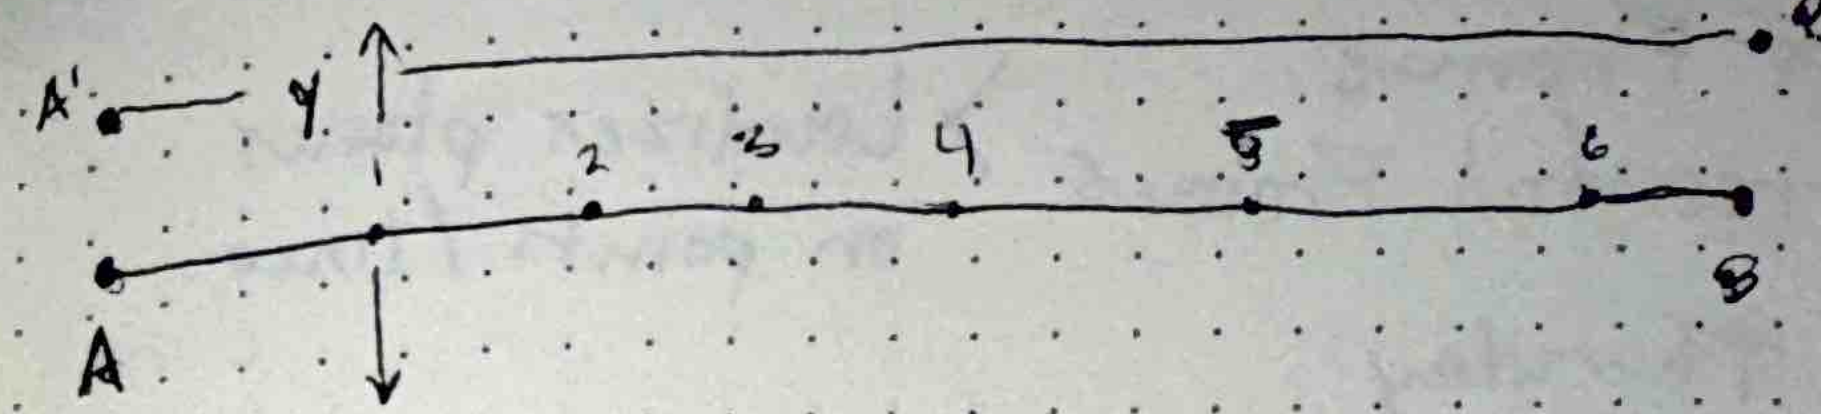

Distance $\overline{AB}$ = #'s of segments

Vector Y = Magnitude of variation

Rotate in the 3rd dimension

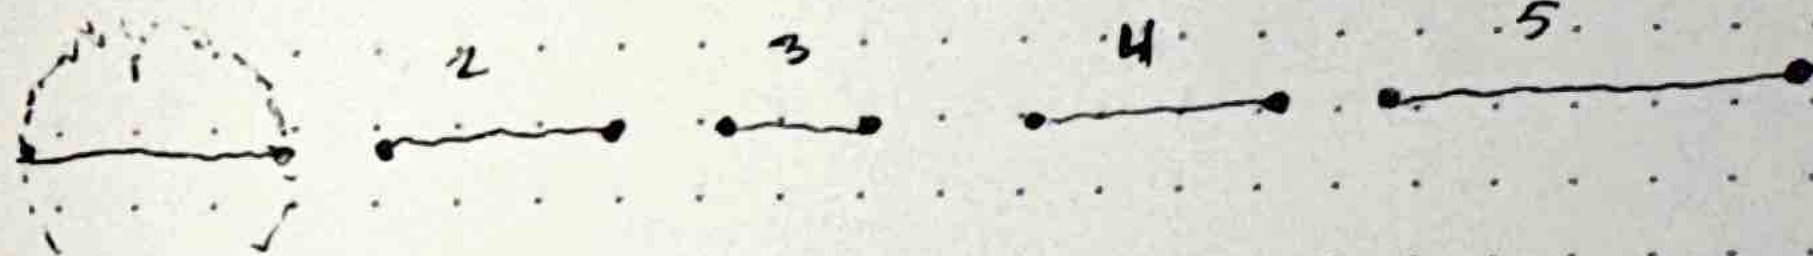

1.) Segment + Separate line
2.) Rotate segments to establish path variations.
Ls In the xy plane
~~3. Establish heights of~~
3.) Turn segments into planes
4.) Establish various heights for the planes.
5.) ~~Create~~ Rotate planes in 3rd dimension / along xz / yz planes based off of sun angle + exposure.

OR

* Maybe the rotations change as people move through the space.



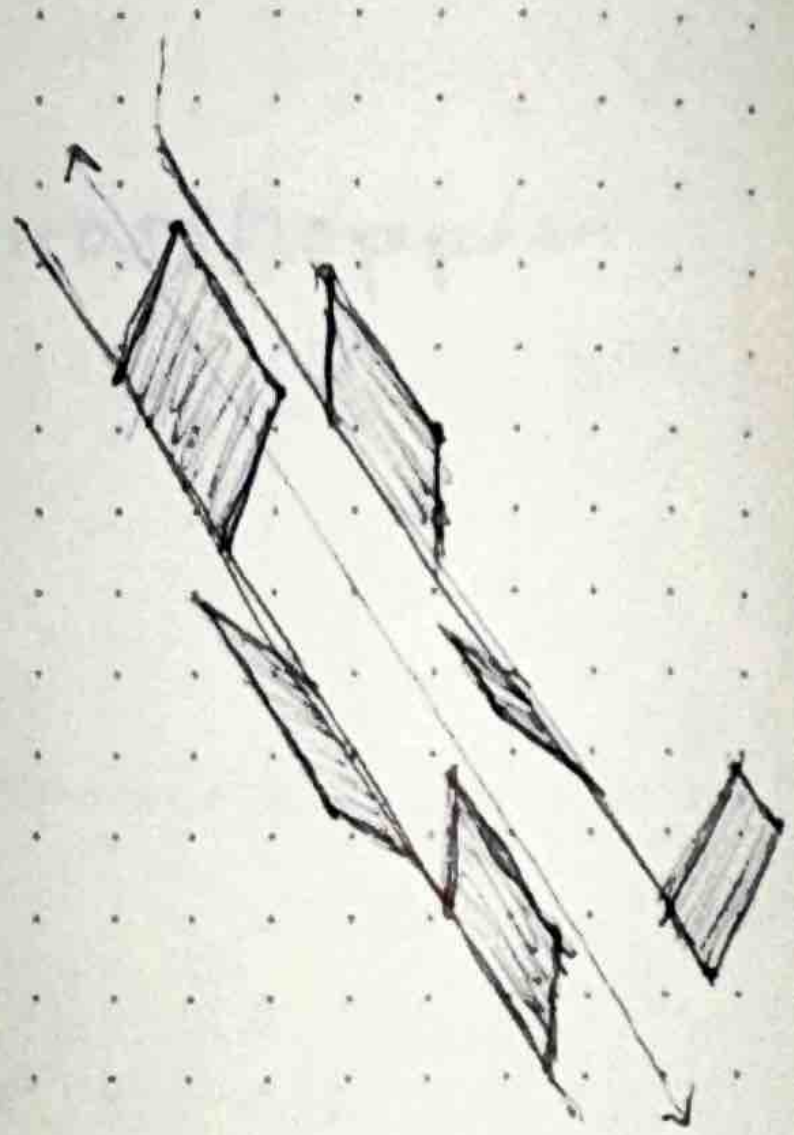

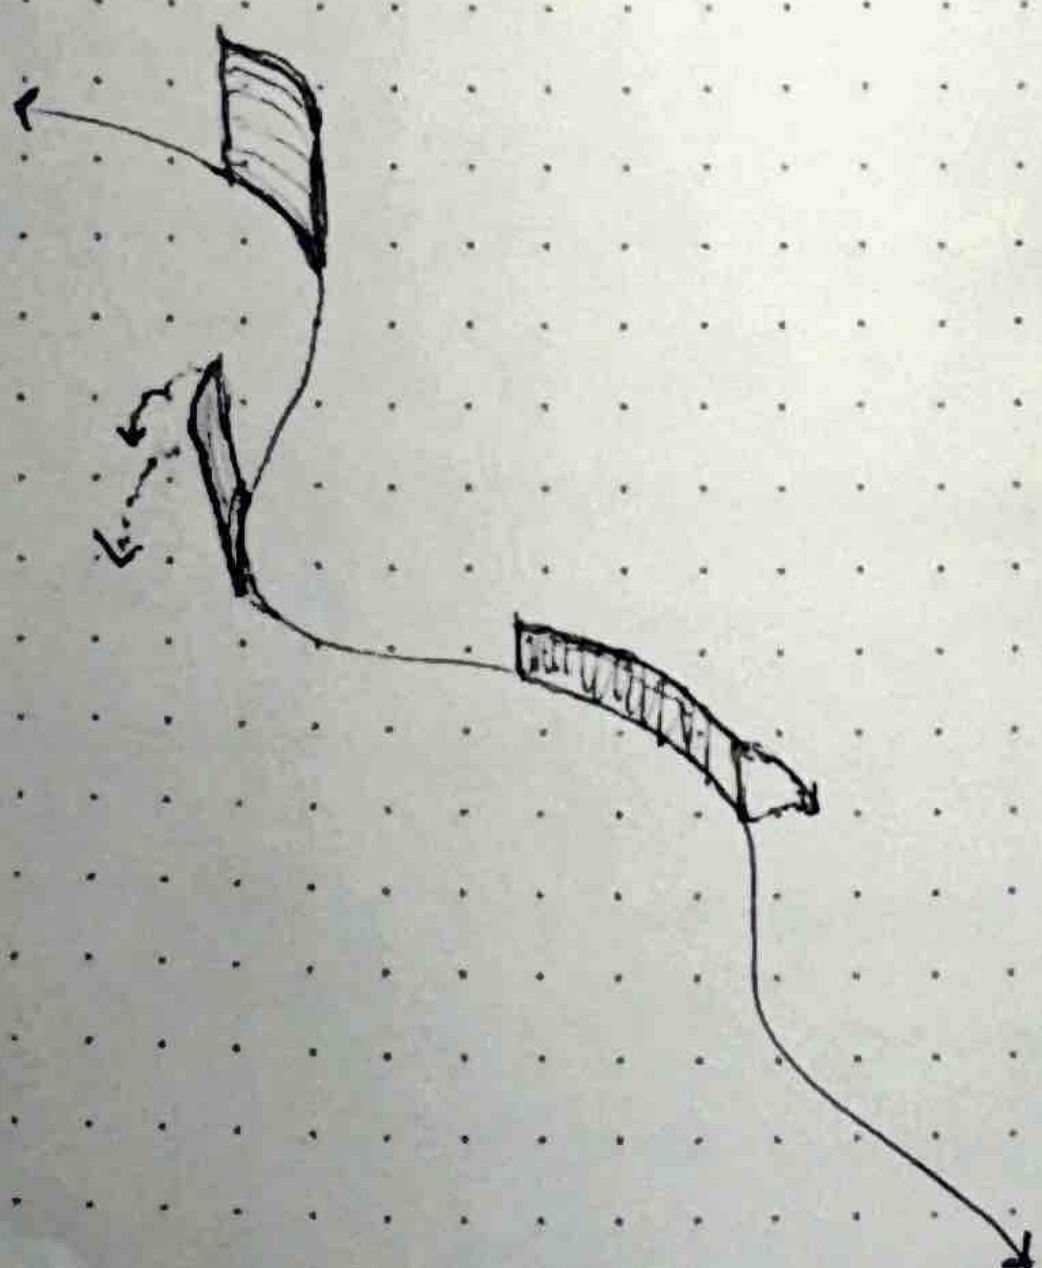

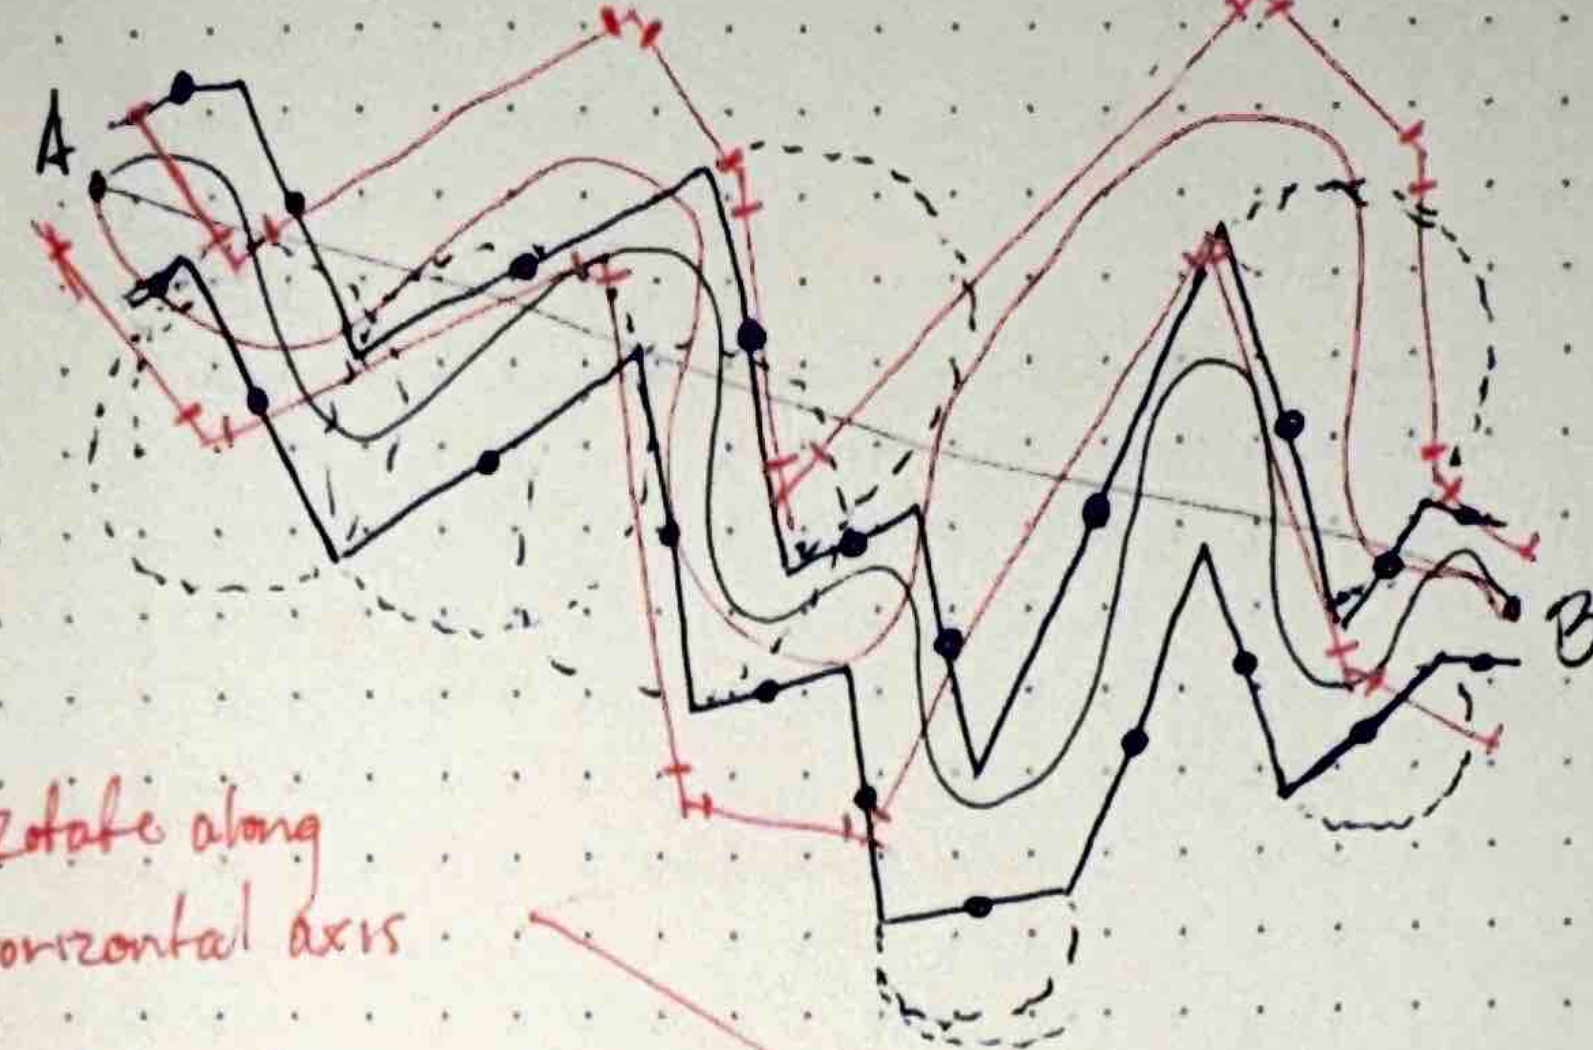

- Rotate along horizontal axis
- Rotate along vertical axis
- Direct Travel Path

* Do these walls move/rotate as the occupant moves through the space?

• Is there a mix of horizontal vs. vertically rotating walls?

• Do some of the panels want to be curved?



Rotate about a horizontal axis



Rotate about a vertical axis

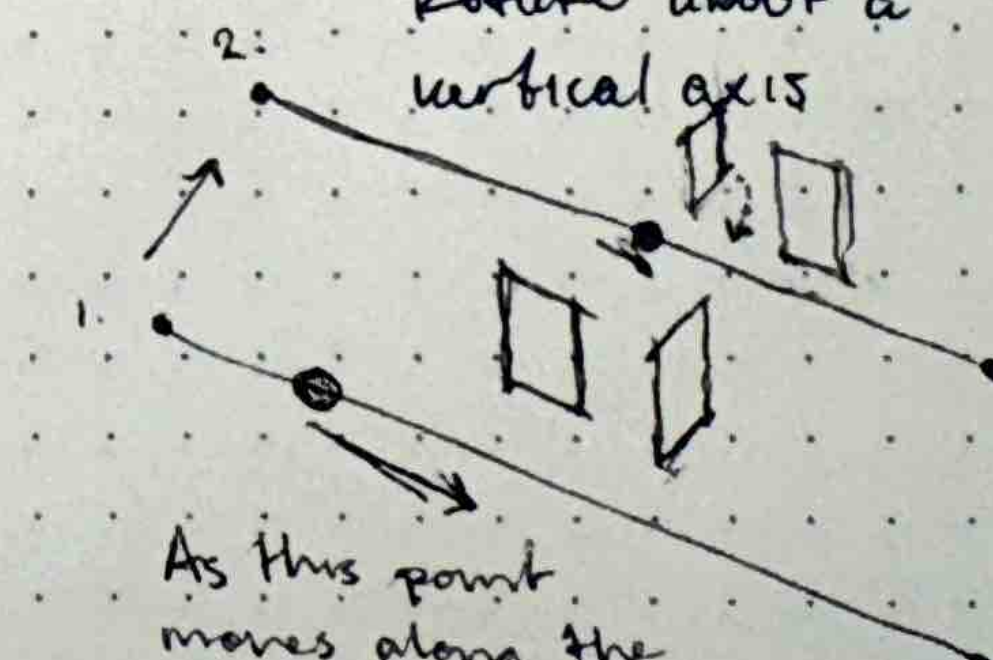

As this point moves along the line, planes rotate more? 90° max?