


Transformation

For the European Championship, stricter rules forced us to cut weight and adapt our software. The weight limit dropped from 2.4 kg to 1.4 kg. We saved nearly 300 grams by reducing the frame to three motors, and another 150 grams by creating custom omniwheels. Consequently, we updated our drivebase software and sharpened the sensor code to handle nearly double the speed. Finally, we integrated a powerful solenoid-driven kicker, allowing the robot to accurately shoot the ball straight into the opponent's goal.

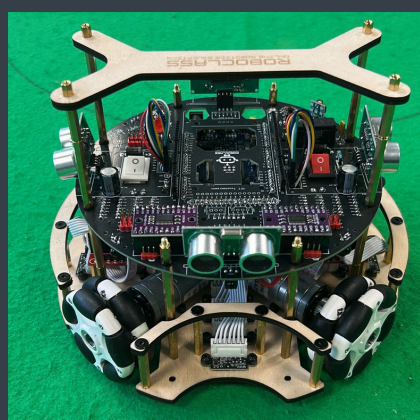


Omni-wheels

We switched from generic omni wheels to custom-designed omni wheels. These custom wheels are significantly lighter, allowing us to reduce the overall weight of the robot. Each wheel consists of a frame, a bearing, and 20 smaller rollers. These rollers provide better grip and ensure that at least one roller is always in contact with the field, allowing the robot to move smoothly and precisely in every direction.

old generic wheels




new custom wheels

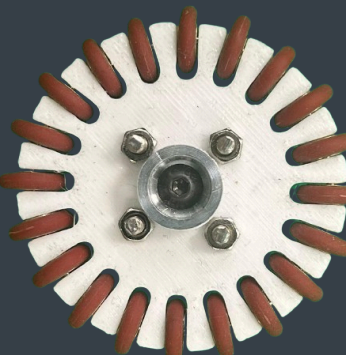


BNO085

For the Dutch National Championship we used the BNO055 as our compass. We often had complications with this sensor, which is why we later decided to switch to a newer version called the BNO085. This newer sensor is fully self-calibrating, a feature which saves us a lot of time during competitions. We also changed the physical position of the sensor from the front of the robot to the exact middle for significantly more accurate readings.

BNO055

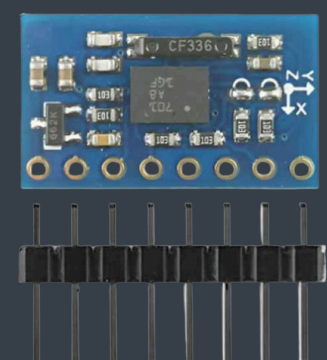


BNO085

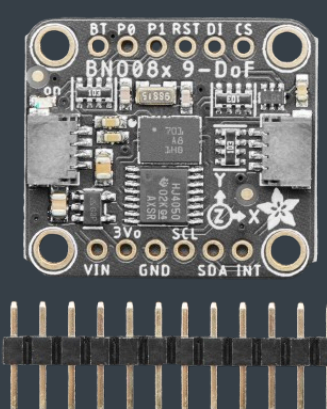

RoboClass Learning Platform


We have never worked on soccer robots before so we used RoboClass to learn about it on their free online learning platform: roboclass.nl. Our robot was originally a basic starter kit developed by RoboClass named "CyberStriker" but has been significantly rebuilt and modified to our liking and to fit the rules for the European Championship soccer IR entry league.

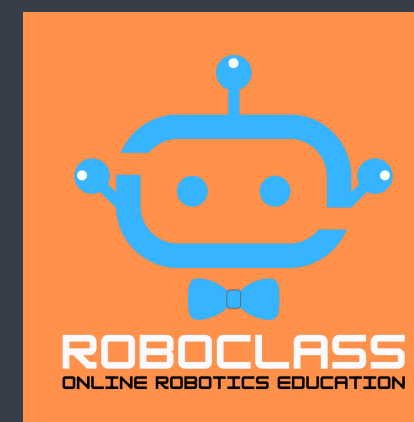

Team Roles




- Our team is divided into three roles to make sure we work efficiently, these roles are:
- Mechanical Engineer: Responsible for designing all non-electronic components and managing the assembly and maintenance of the robot.
 - Software engineer: Focused on writing the C++ code, implementing the PID controller, and fine-tuning the robot's logic and sensor integration.
 - Electrical Engineer: In charge of all electronics which means, soldering the PCB to troubleshooting electrical circuits and ensuring stable power.

Find us on all platforms using our Linktree




Software

Our code is written in C++ and uploaded using the Arduino IDE. It operates on a high-speed logic loop that prioritizes field safety and scoring efficiency. The system processes 8 IR sensors to track the ball's signature and calculate the optimal approach angle. Once the ball is captured, the robot uses ultrasonic sensors to determine its position on the field. This allows the code to calculate and change its heading point towards the opponent's goal and activate the kicker to shoot the ball into the goal. Throughout these maneuvers, the BNO085 gyroscope feeds real-time data into the PID (Proportional-Integral-Derivative) controller, ensuring the robot remains aligned and stable, even after strong collisions.

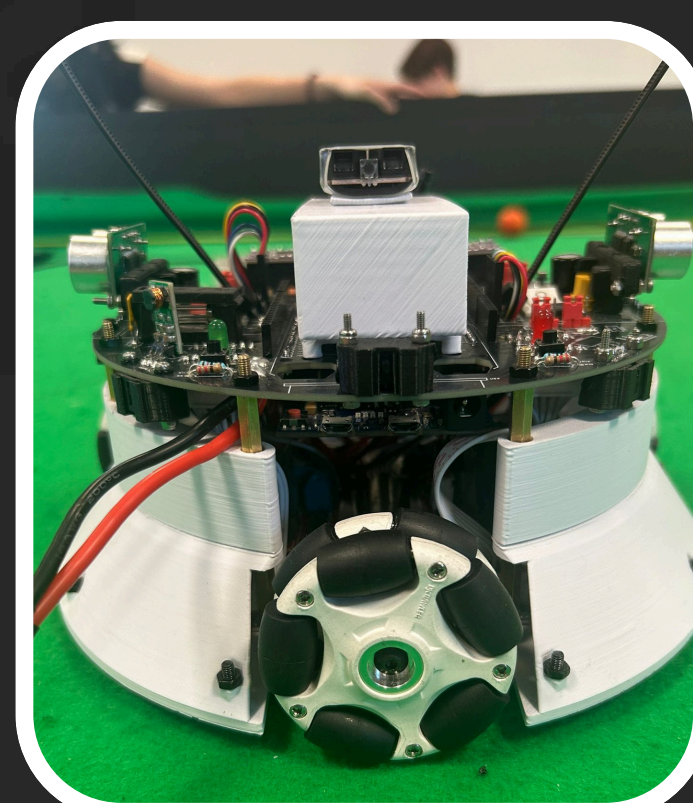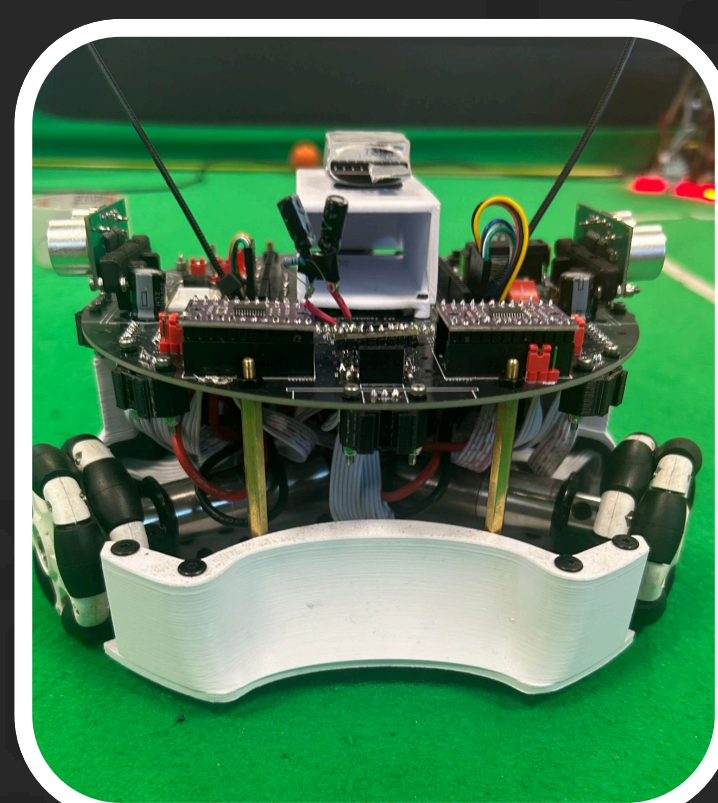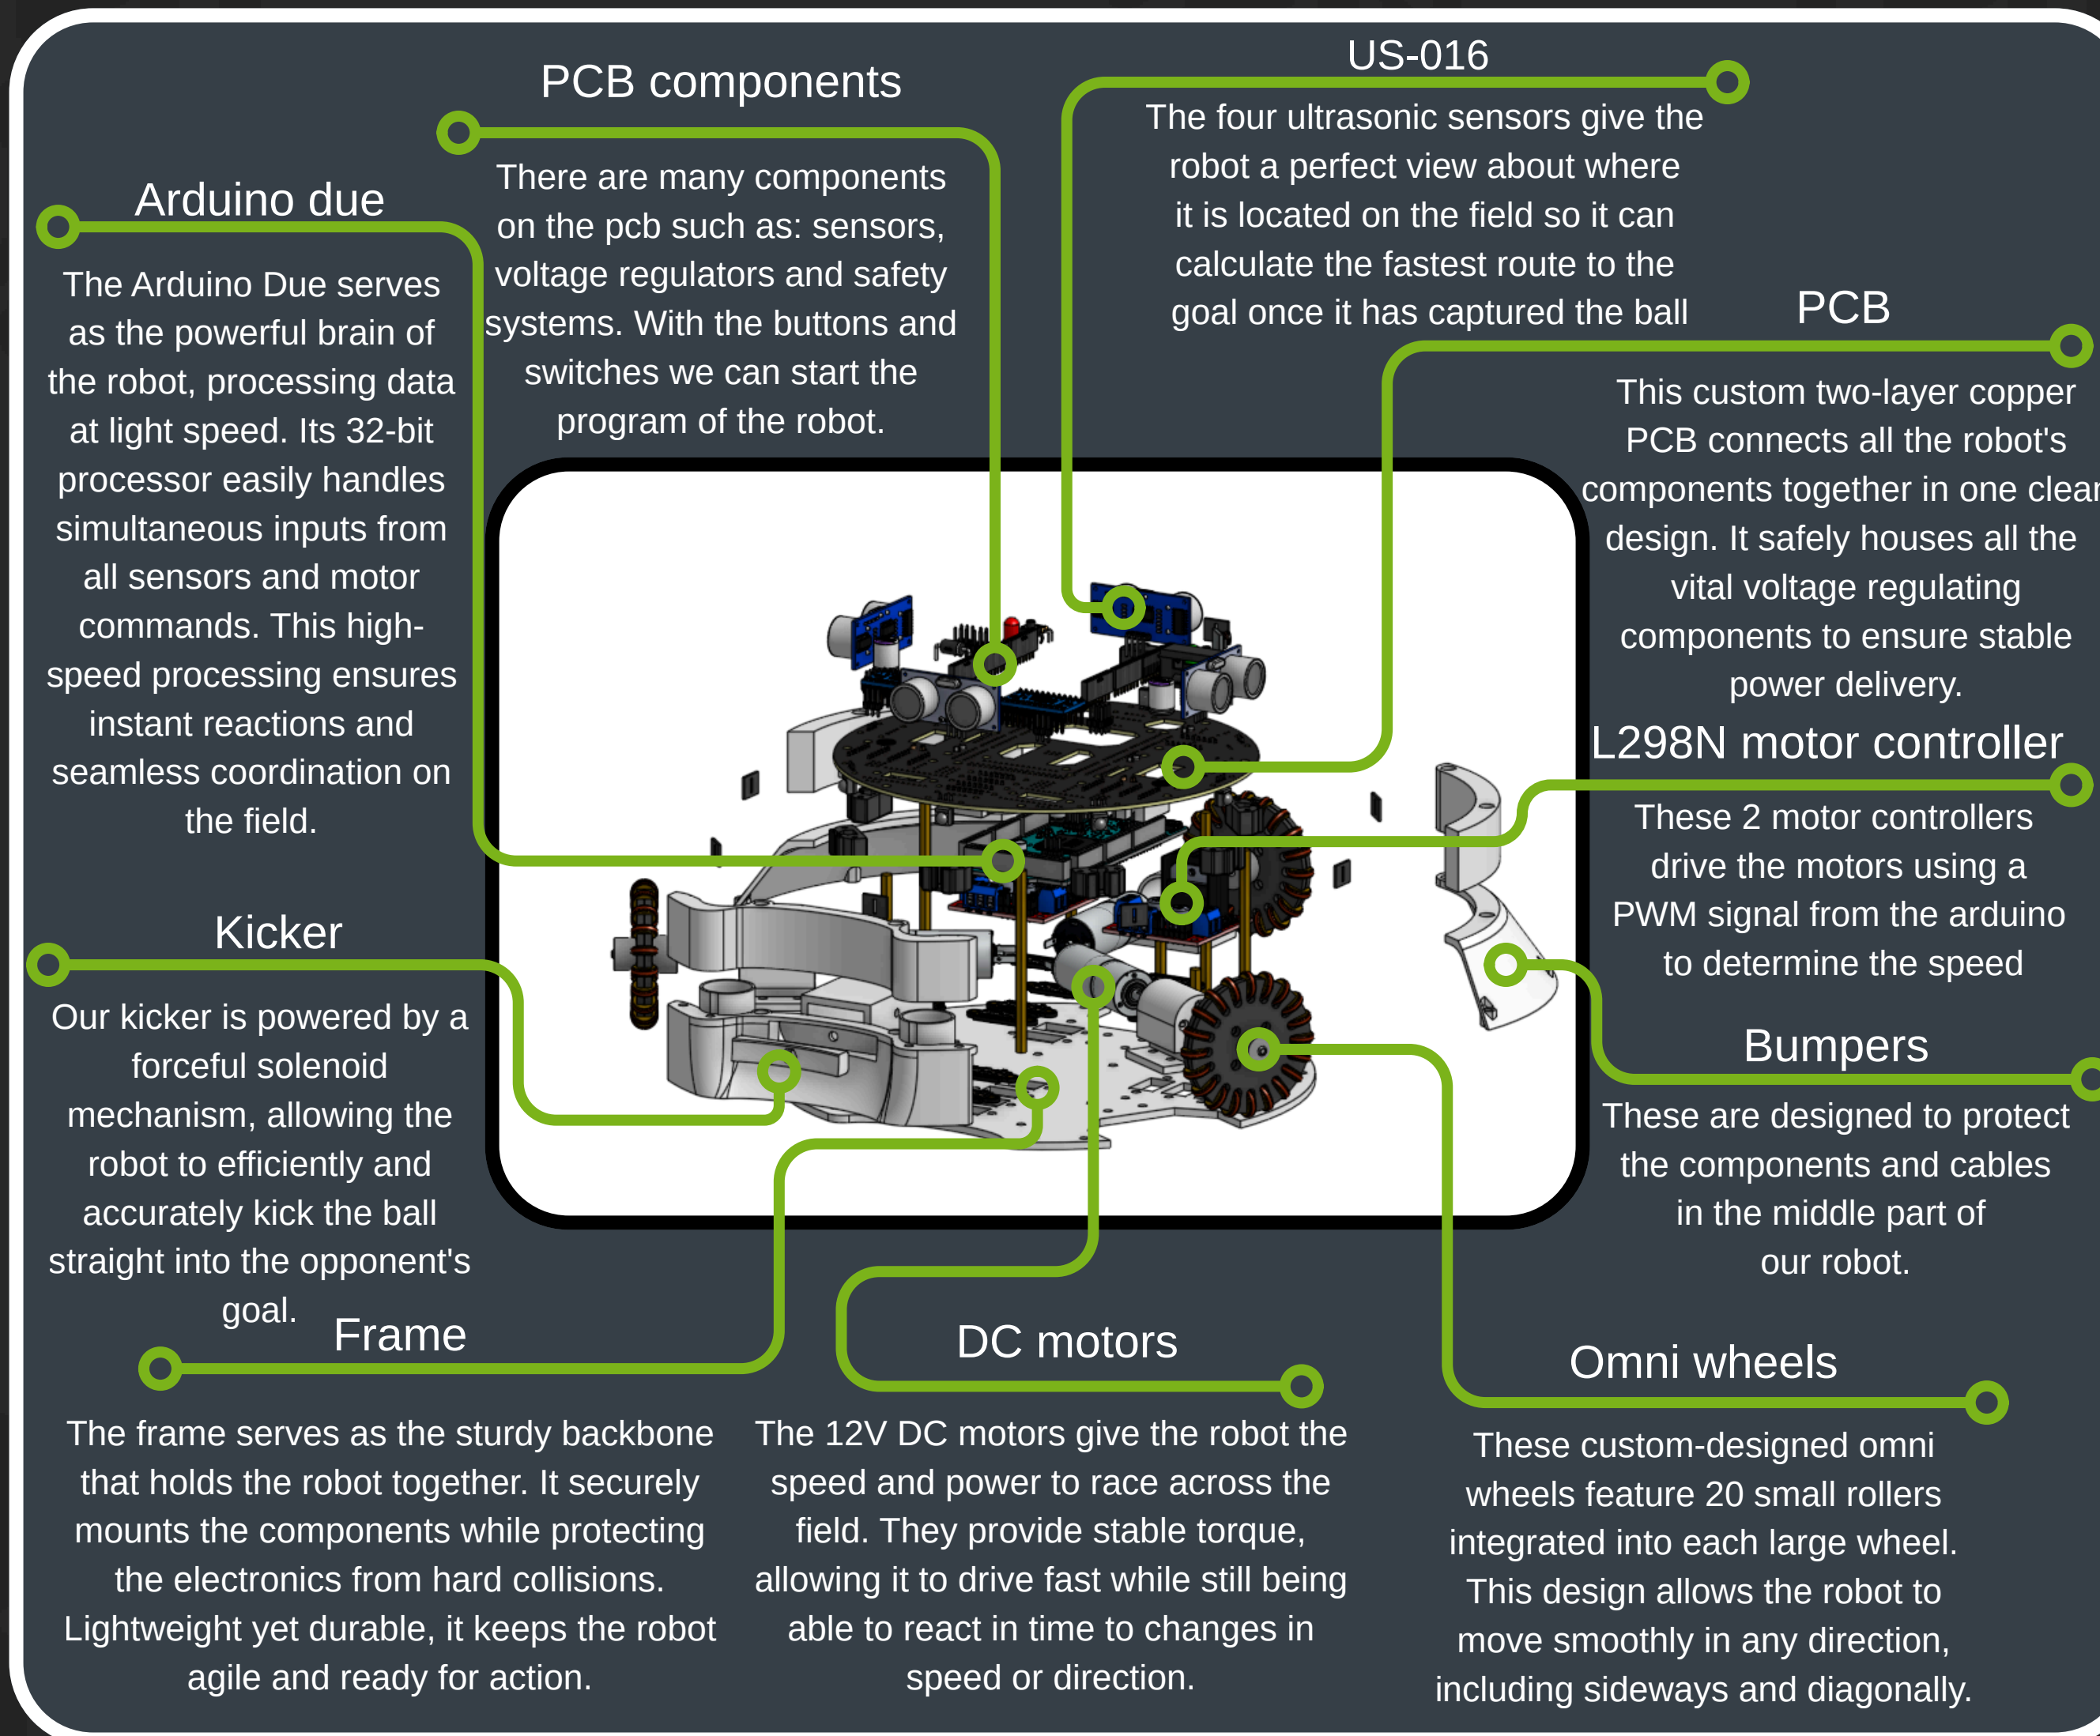

Capture zone

The capture zone is designed to securely collect the ball and allow the robot to drive with it, even when the ball is not perfectly centered. The back section is designed to house the kicker mechanism and capacitors. We also designed a moving front piece connected to the kicker, ensuring there is always enough contact surface with the ball. This allows the robot to shoot the ball straight instead of at an angle.

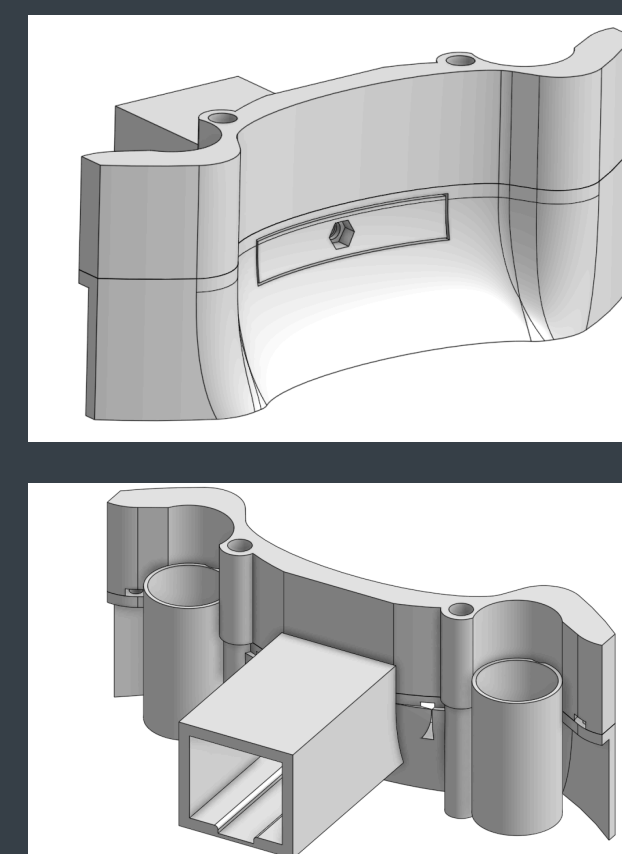


Our Team



- Bent: Software engineer
- Binqe: Software engineer
- Casper: Mechanical & electrical engineer
- David: Mechanical & electrical engineer

Transformation

For the European Championship, stricter rules forced us to cut weight and adapt our software. The weight limit dropped from 2.4 kg to 1.4 kg. We saved nearly 300 grams by reducing the frame to three motors, and another 150 grams by creating custom omniwheels. Consequently, we updated our drivebase software and sharpened the sensor code to handle nearly double the speed. Finally, we integrated a powerful solenoid-driven kicker, allowing the robot to accurately shoot the ball straight into the opponent's goal.

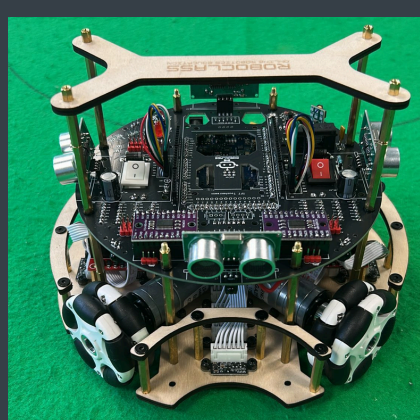


Omni-wheels

We switched from generic omni wheels to custom-designed omni wheels. These custom wheels are significantly lighter, allowing us to reduce the overall weight of the robot. Each wheel consists of a frame, a bearing, and 20 smaller rollers. These rollers provide better grip and ensure that at least one roller is always in contact with the field, allowing the robot to move smoothly and precisely in every direction.

old generic wheels




new custom wheels




BNO085

For the Dutch National Championship we used the BNO055 as our compass. We often had complications with this sensor, which is why we later decided to switch to a newer version called the BNO085. This newer sensor is fully self-calibrating, a feature which saves us a lot of time during competitions. We also changed the physical position of the sensor from the front of the robot to the exact middle for significantly more accurate readings.

BNO055

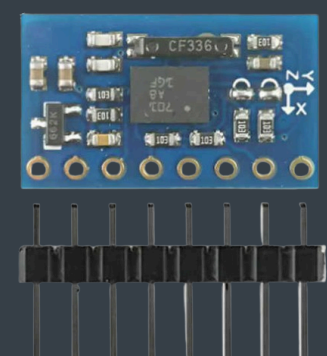


BNO085

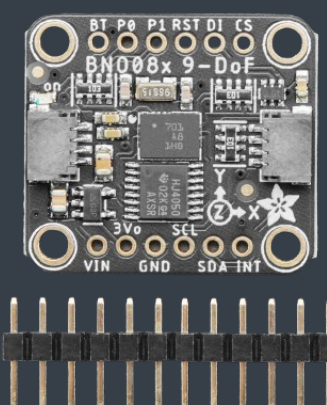

RoboClass Learning Platform


We have never worked on soccer robots before so we used RoboClass to learn about it on their free online learning platform: roboclass.nl. Our robot was originally a basic starter kit developed by RoboClass named "CyberStriker" but has been significantly rebuilt and modified to our liking and to fit the rules for the European Championship soccer IR entry league.

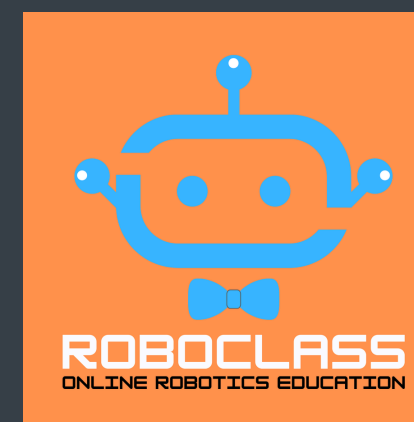

Team Roles




- Our team is divided into three roles to make sure we work efficiently, these roles are:
- Mechanical Engineer: Responsible for designing all non-electronic components and managing the assembly and maintenance of the robot.
 - Software engineer: Focused on writing the C++ code, implementing the PID controller, and fine-tuning the robot's logic and sensor integration.
 - Electrical Engineer: In charge of all electronics which means, soldering the PCB to troubleshooting electrical circuits and ensuring stable power.

Find us on all platforms using our Linktree




Software

Our code is written in C++ and uploaded using the Arduino IDE. It operates on a high-speed logic loop that prioritizes field safety and scoring efficiency. The system processes 8 IR sensors to track the ball's signature and calculate the optimal approach angle. Once the ball is captured, the robot uses ultrasonic sensors to determine its position on the field. This allows the code to calculate and change its heading point towards the opponent's goal and activate the kicker to shoot the ball into the goal. Throughout these maneuvers, the BNO085 gyroscope feeds real-time data into the PID (Proportional-Integral-Derivative) controller, ensuring the robot remains aligned and stable, even after strong collisions.

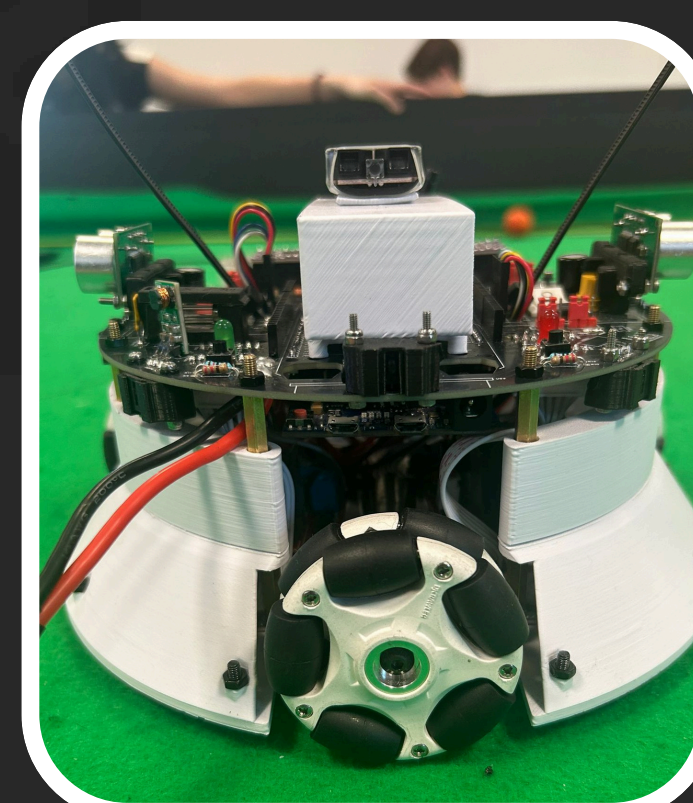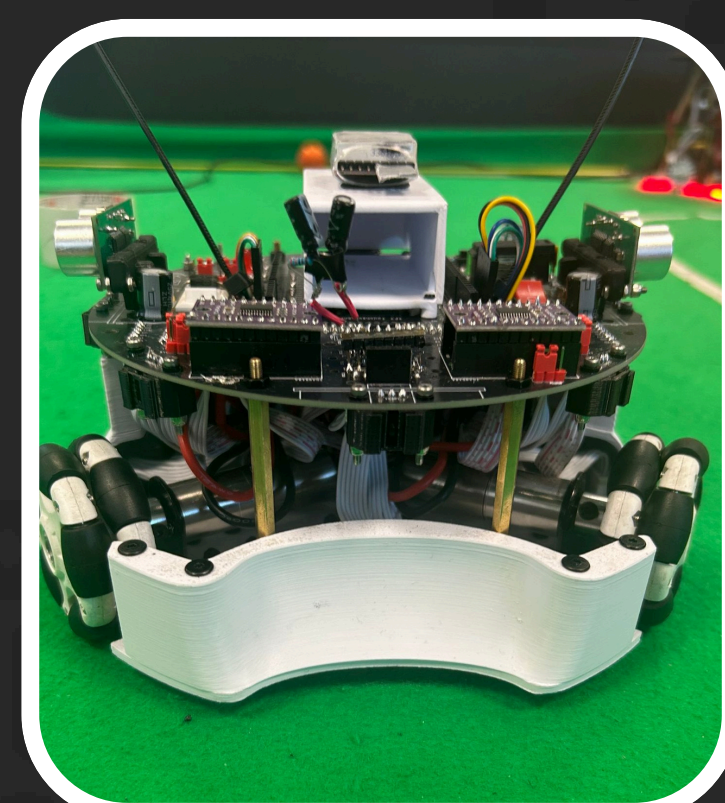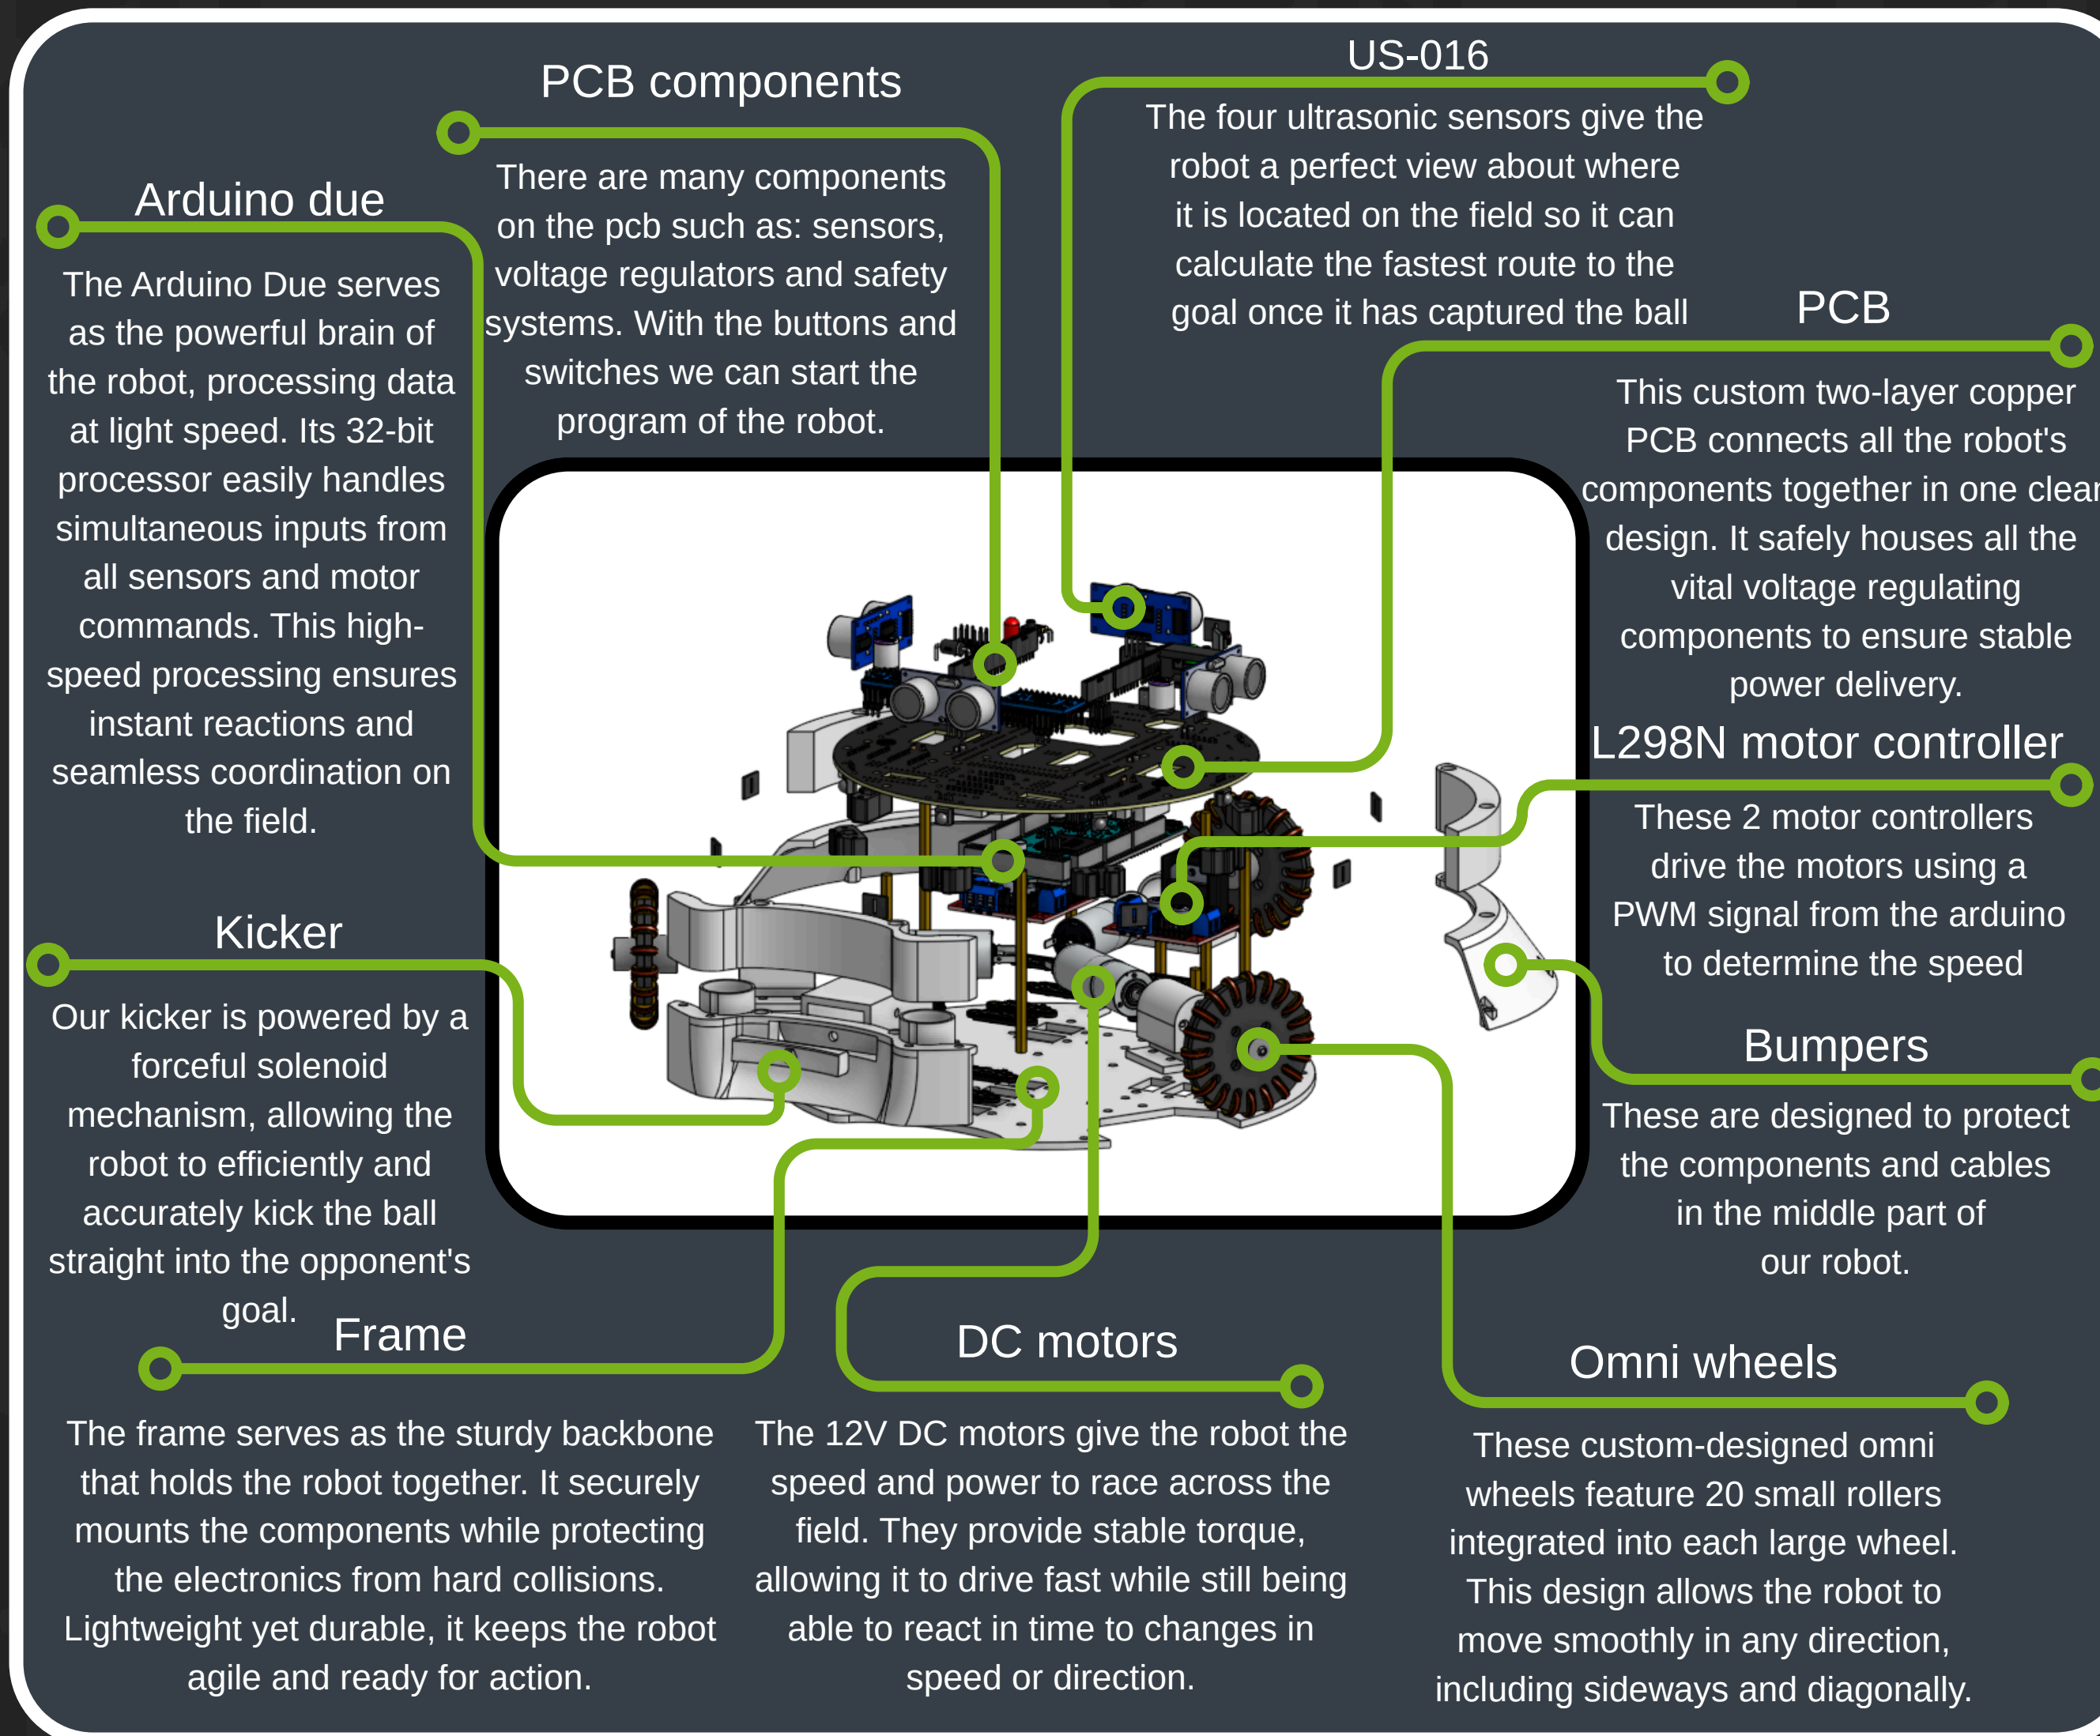

Capture zone

The capture zone is designed to securely collect the ball and allow the robot to drive with it, even when the ball is not perfectly centered. The back section is designed to house the kicker mechanism and capacitors. We also designed a moving front piece connected to the kicker, ensuring there is always enough contact surface with the ball. This allows the robot to shoot the ball straight instead of at an angle.

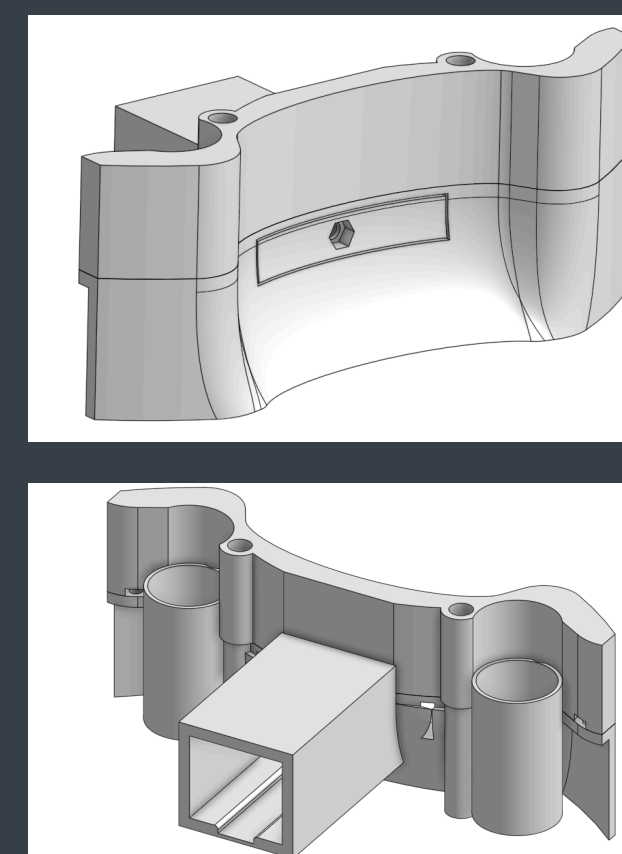

Our Team



- Bent: Software engineer
- Binqe: Software engineer
- Casper: Mechanical & electrical engineer
- David: Mechanical & electrical engineer