



Modified standard block. Modified to adjust values and suit usecase.

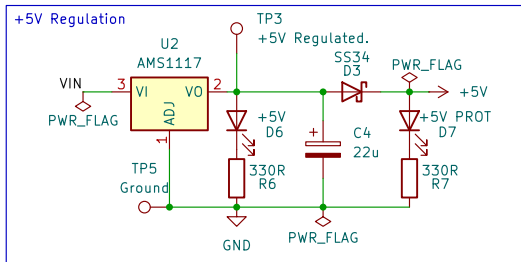

Non standard block. Reason is for space efficiency compared to standard +5V regulation circuit.

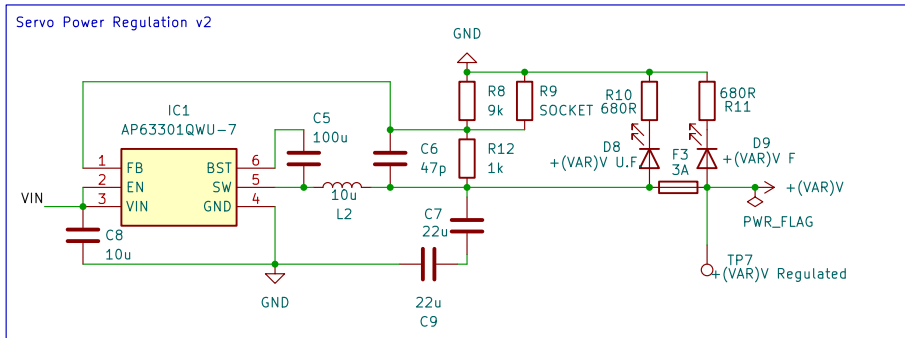


Non standard block. Reason for using this over a standard circuit is that this power regulation circuit can deliver the required current to our servo, whereas standard servo would be overloaded.

## CAN Transceiver (Bus 1, Non Isolated)





For use in most applications (NUCAN Compatible)

Last updated 05-09-2025

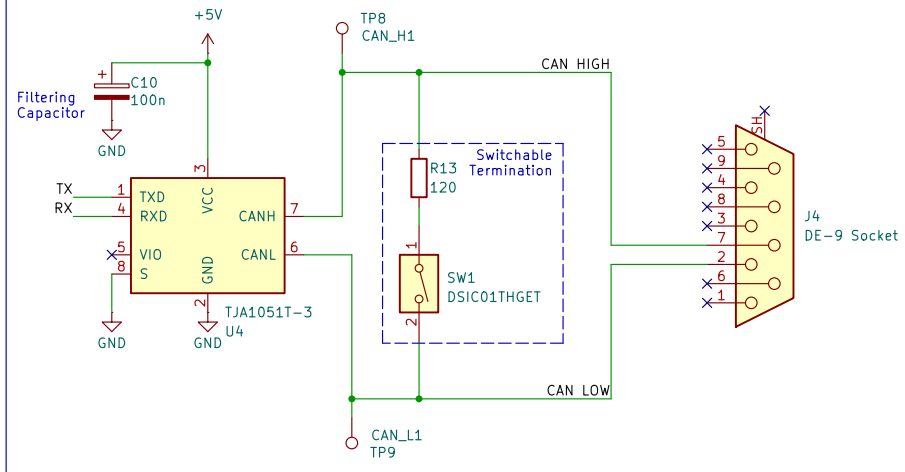

## Teensy 4.0 Microcontroller

Last updated 05-09-2025

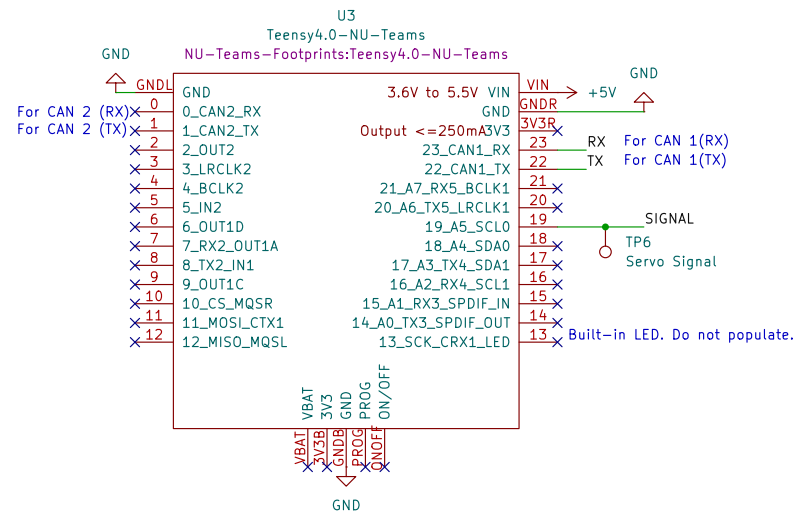

C3479858  
Theo Devos-Vernes  
**NU Teams**

Sheet: /  
File: DRS\_Control\_Unit.kicad\_sch

**Title: DRS Control Unit**

Size: A4 Date: 2026-10-08  
KiCad E.D.A. 10.0.6

Rev: 001  
Id: 1/1