

Input Power

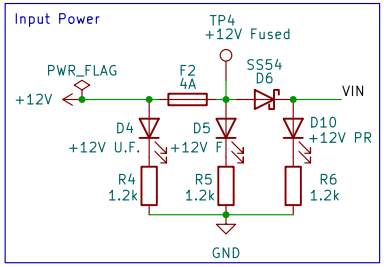


Modified standard block. Modified to adjust values and suit usecase.

+5V Regulation

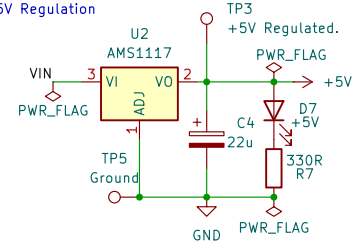

Non standard block. Reason is for space efficiency compared to standard 5V regulation circuit.


Servo Power Regulation v2

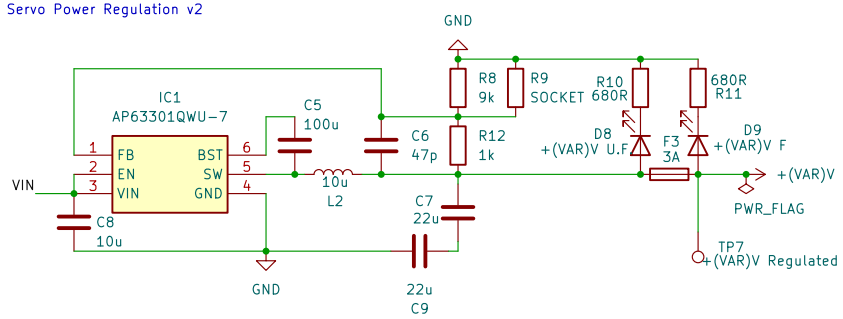

Non standard block. Reason for using this over a standard circuit is that this power regulation circuit can deliver the required current to our servo, whereas standard buck converter circuit would be overloaded.

Teensy 4.0 Microcontroller


Last updated
05-09-2025

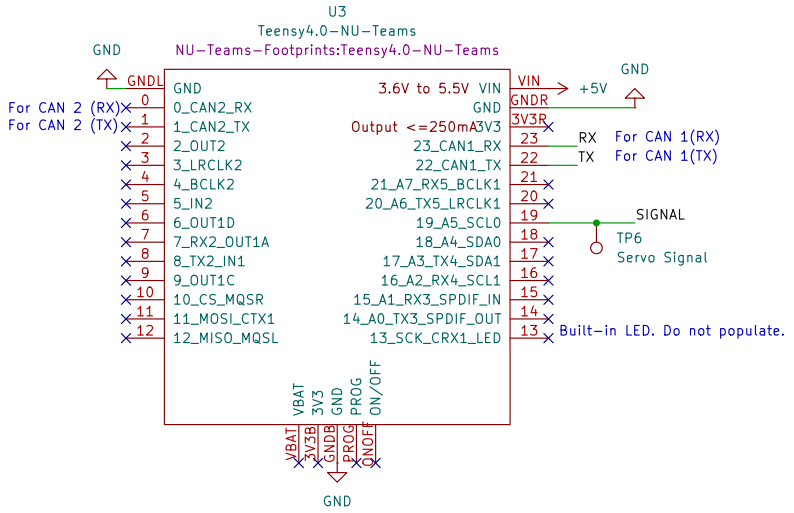


CAN Transceiver (Bus 1, Non Isolated)

For use in most applications
(NUCAN Compatible)


Last updated
05-09-2025

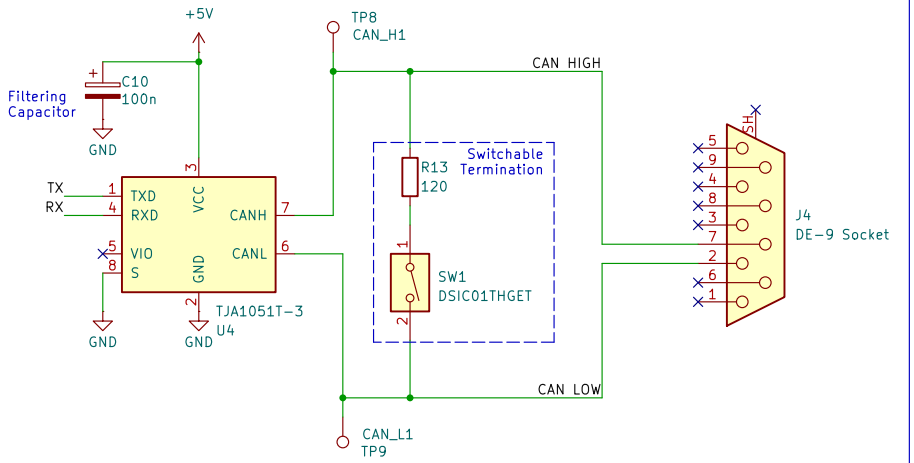

Vehicle Interface




Servo Output



Mounting Holes & Branding Block



Testing Terminal



C3479858
Theo Devos-Vernes
NU Teams

Sheet: /
File: DRS_Control_Unit.kicad_sch

Title: DRS Control Unit

Size: A4	Date: 2026-10-08	**Rev: 001**
KiCad E.D.A. 10.0.6		Id: 1/1