
1 Transimpedance amplifier


2 High–pass 159 Hz, gain 11

3 Synchronous demodulator


4 Low–pass 1.6 Hz x2, buffer

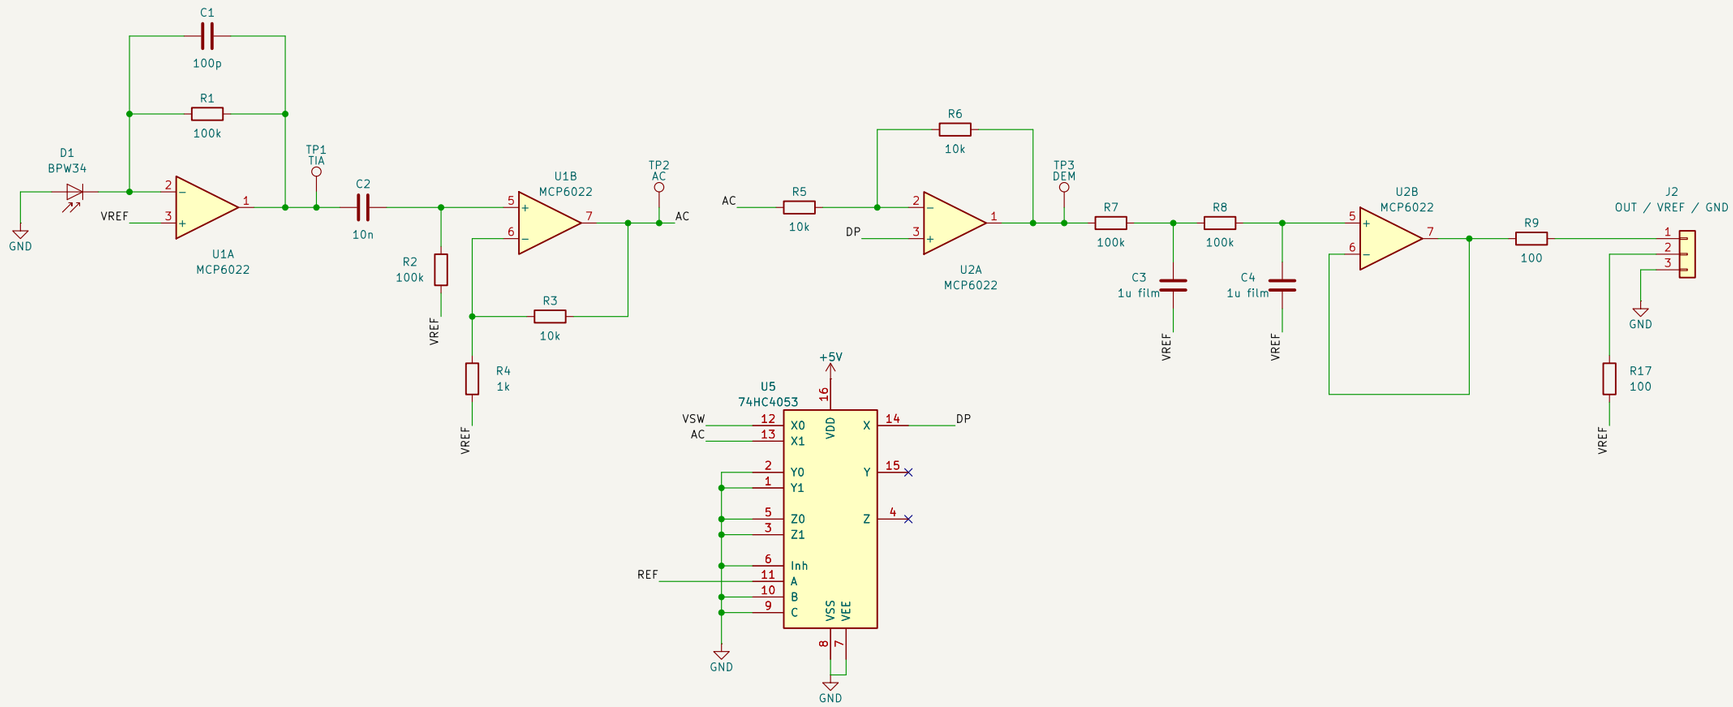


Battery input and 5 V regulator

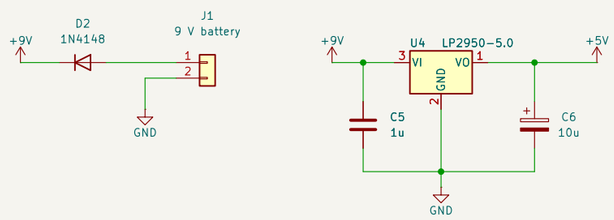


2.5 V virtual ground (VREF)

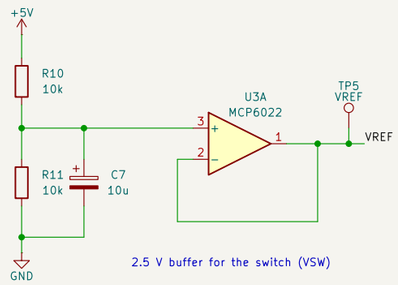


1024 Hz reference: 32.768 kHz / 32

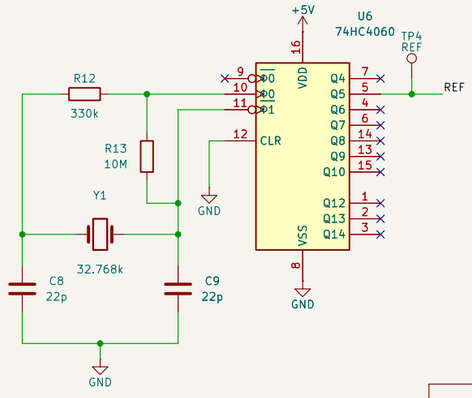


LED driver (LED on a lead, powered from 9 V)

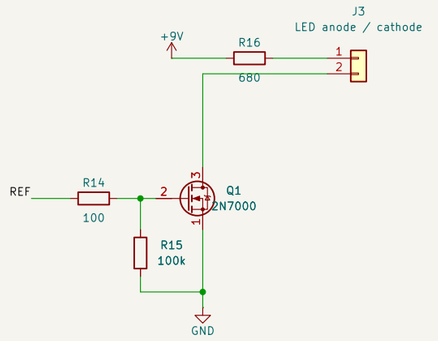


Supply pins and decoupling (one 100 nF at each IC)

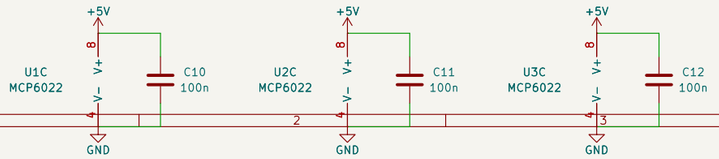



Power flags for the rule checker

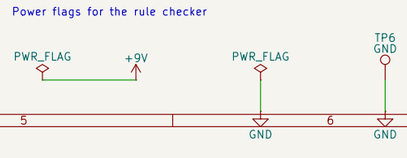

Sheet: /	
File: lockin.kicad_sch	
Title: Lock–in amplifier for an optical sensor	
Size: A3	Date:
KiCad E.D.A. 10.0.6	Id: 1/1

Rev: 0.1