
GUIDELINES FOR ROOF PERIMETER ZONES FOR MECHANICALLY ATTACHED ROOF SYSTEM

PERIMETER ZONES


SAME LEVEL ROOF



GREATER THAN 10 FT (3m)

1


SPLIT LEVEL ROOFS



LESS THAN 10 FT (3m)

2


CANOPY ROOF



INSTALL PERIMETER SHEETS OVER THE ENTIRE OVERHANG (PROJECTION ROOF) AREA, EXTENDING ONTO THE MAIN ROOF DECK WHEN AT THE SAME LEVEL AS SHOWN.


3

LARGE OPENINGS OR LOADING DOCKS

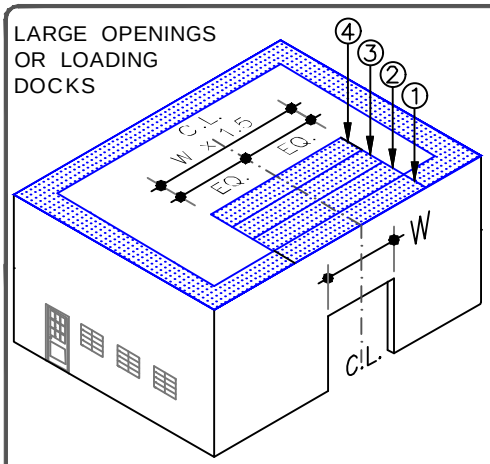

4 PERIMETER SHEETS CENTERED OVER LARGE OPENINGS

4

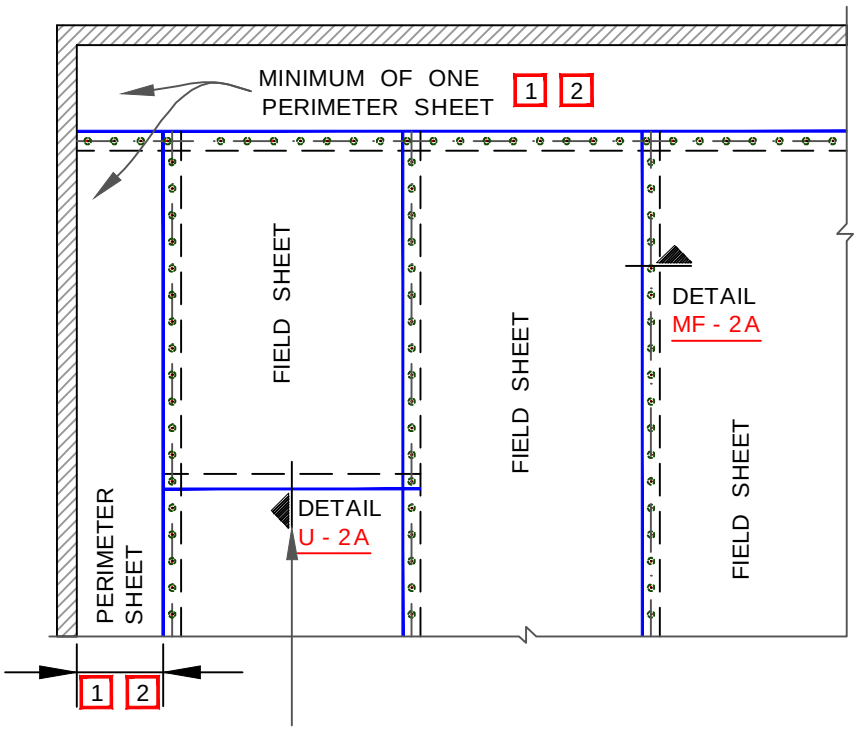

END LAPS DO NOT REQUIRE MECHANICAL FASTENING AND SHALL BE OVERLAPPED 2" (5cm) MINIMUM. PER DETAIL U - 2A

NOTES:

1. PERIMETER SHEETS:

1.1. WHEN USING 10' (3m) WIDE FIELD SHEETS, 5' (1.5m) WIDE PERIMETER SHEETS ARE UTILIZED.

1.2. WHEN USING 81" (2.1m) WIDE FIELD SHEETS, 40.5" (1m) WIDE PERIMETER SHEETS ARE UTILIZED.

2. REFER TO CARLISLE SPECIFICATIONS FOR REQUIRED NUMBER OF PERIMETER SHEETS, SHEET WIDTH AND MEMBRANE FASTENING SPACING.

CARLISLE SYNTEC SYSTEMS

MEMBRANE SECUREMENT

MAXIMUM WARRANTY: 30 YEARS

PVC

DETAIL NO.

MF - 2

MF (Mechanically Fastened)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated