


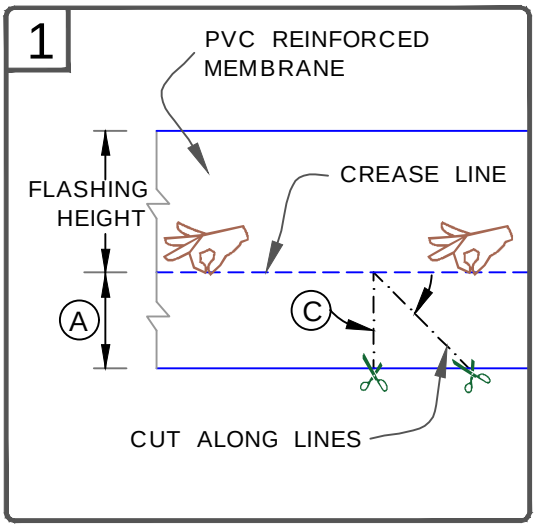


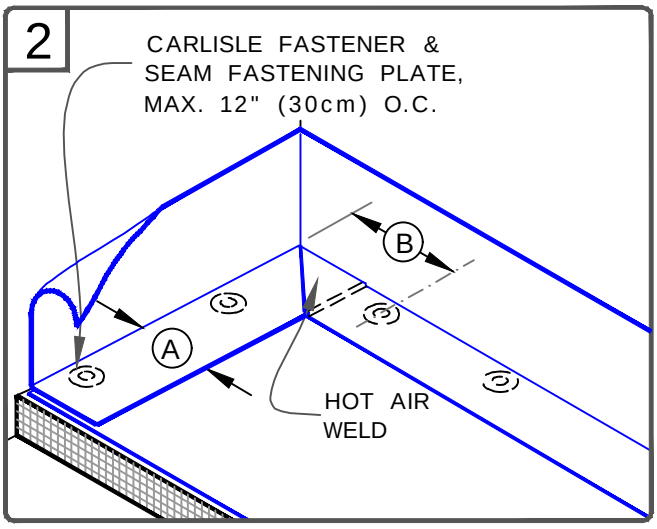

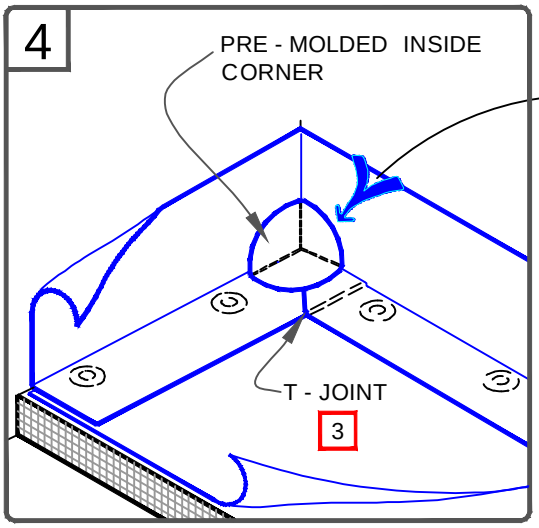

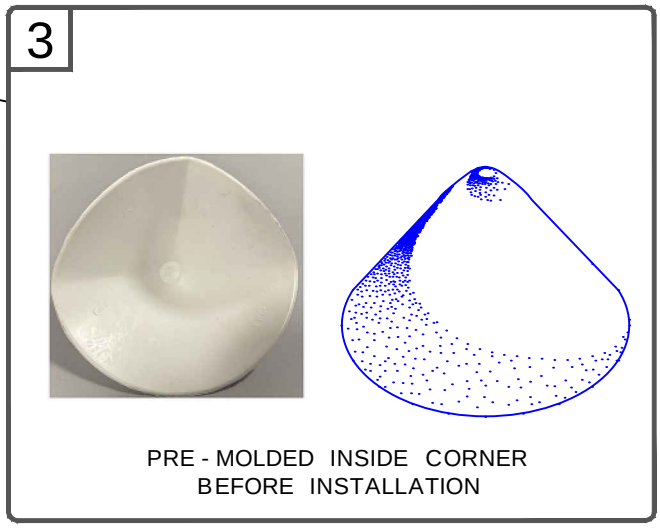

WHEN USING 80-MIL (2.03mm) THICK MEMBRANE
APPLY A 4 - 1/2" (11.43cm) DIAMETER "T - JOINT" COVER AT FIELD SPLICE INTERSECTIONS, CENTRALLY ALIGNED.

NOTES:

1. POSITION FASTENING PLATES 6" TO 9" (15 TO 23cm) FROM THE CORNER AND 1/2" TO 1" (1.5 TO 2.5cm) FROM EDGE OF MEMBRANE.

2. REFER TO CARLISLE SPECIFICATIONS FOR ACCEPTABLE CARLISLE FASTENERS AND PLATES.

DIMENSIONS		cm	
A	6"	15	APPROX.
B	6" - 9"	15 - 23	
C	45 - DEGREES APPROX.		

CARLISLE SYNTEC SYSTEMS

PRE–MOLDED INSIDE CORNER FLASHING

MAXIMUM WARRANTY: 30 YEARS

PVC

DETAIL NO.
U - 15A
U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated