CARLISLE TERMINATION BAR FASTENED 6" (15cm) O.C. MAXIMUM. IT MUST PROVIDE A CONSTANT COMPRESSION ON WATER CUT - OFF MASTIC

UNIVERSAL SINGLE - PLY SEALANT


EXTEND MEMBRANE SHEET TO 1/2" (1.5cm) MINIMUM BELOW THE METAL TERMINATION BAR.

WOOD NAILER (BY OTHERS), SEE INSET BELOW

WATER CUT - OFF MASTIC xxx


1/2" (1.3cm)

GUTTER (BY OTHERS) SEE INSET

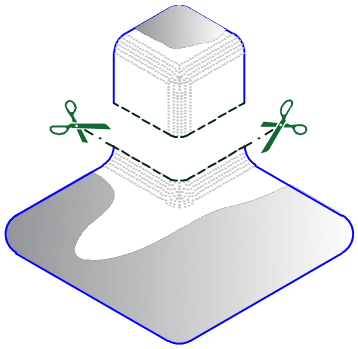


60 - MIL (1.52mm) THICK PVC, UNIVERSAL CORNER CAN BE USED FOR AT TOP CORNER. CUT AS SHOWN IN DETAIL U - 15G

DESIGNER MAY USE CARLISLE SECUREDGE TERMINATION BAR WITH FASCIA COVER ALSO



COLORED COVER

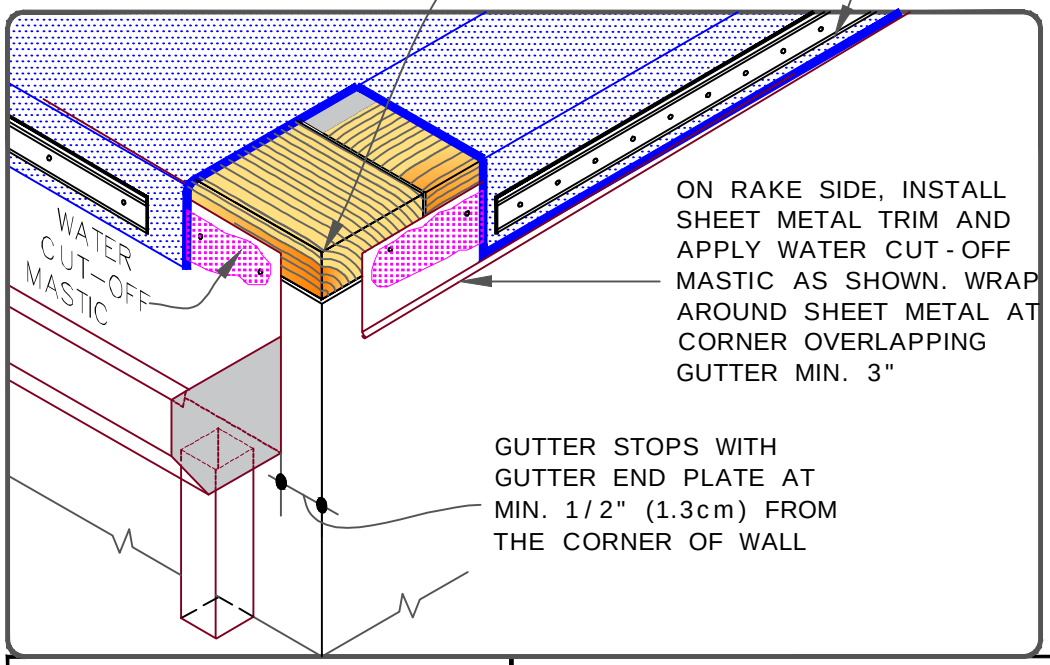


ON RAKE SIDE, INSTALL SHEET METAL TRIM AND APPLY WATER CUT - OFF MASTIC AS SHOWN. WRAP AROUND SHEET METAL AT CORNER OVERLAPPING GUTTER MIN. 3"

GUTTER STOPS WITH GUTTER END PLATE AT MIN. 1/2" (1.3cm) FROM THE CORNER OF WALL

CARLISLE SYNTEC SYSTEMS

METAL BAR EDGE TERMINATION

MAXIMUM WARRANTY: 30 YEARS

PVC

DETAIL NO.

U - 1C

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated