

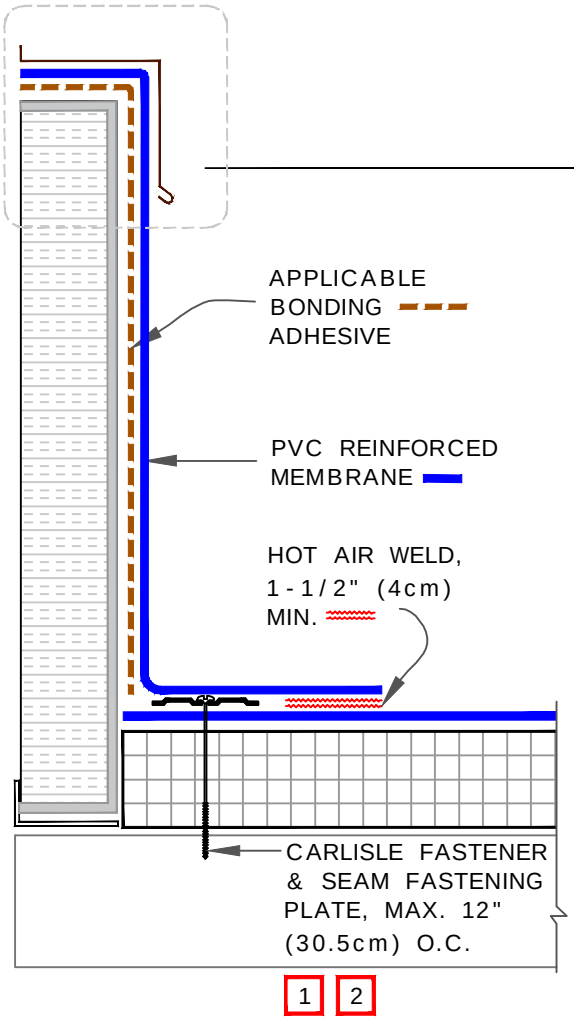


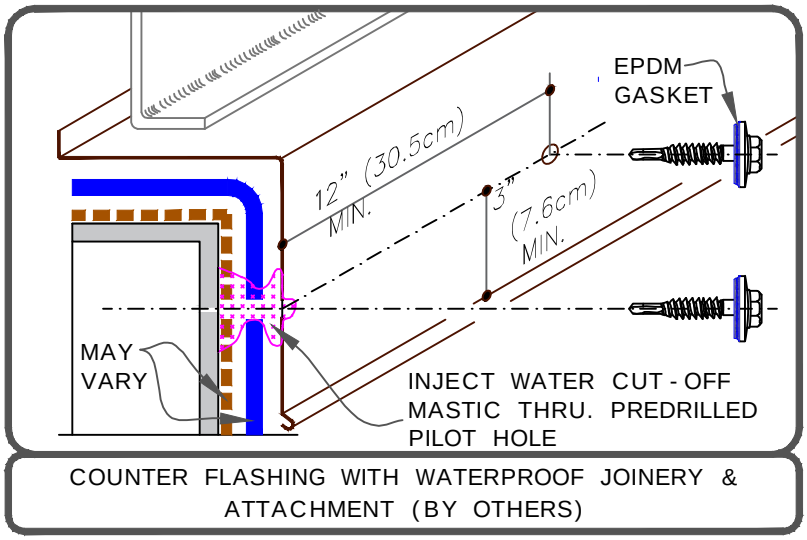

PVC ONLY (NOT KEE HP)
IN LIEU OF BONDING ADHESIVE, THE CURB FLASHING MAY BE INSTALLED IN CAV GRIP PVC.

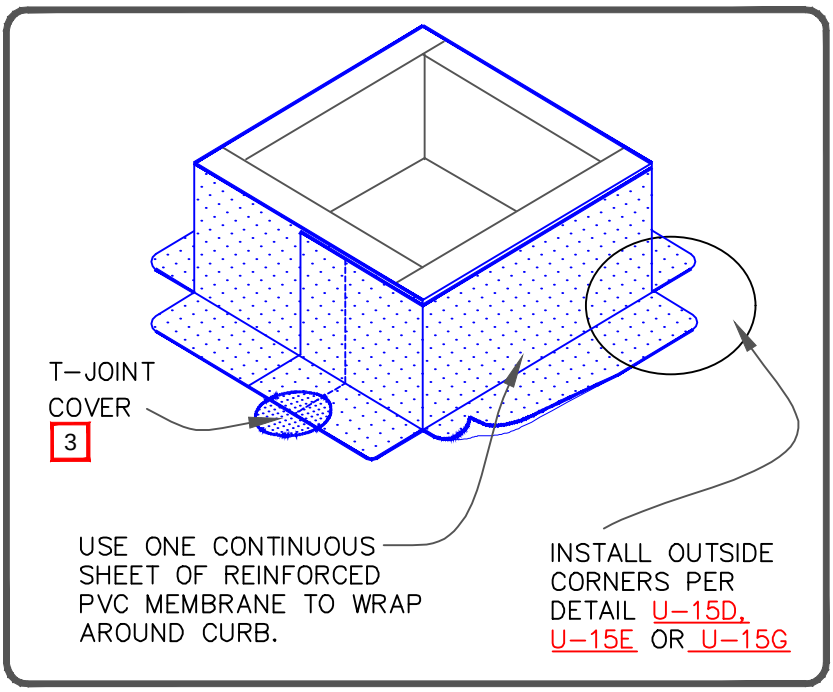

NOTES:

1. REFER TO CARLISLE SPECIFICATIONS FOR ACCEPTABLE CARLISLE FASTENERS AND PLATES.
2. MECHANICAL SECUREMENT MAY BE INSTALLED INTO THE VERTICAL SUBSTRATE.
3. WHEN USING 80 MIL (2.03mm) THICK CURB FLASHING, THE INTERSECTIONS BETWEEN SPLICES MUST OVERLAID WITH A PVC "T-JOINT" COVER.

CARLISLE SYNTEC SYSTEMS

CURB FLASHING WITH PVC MEMBRANE

MAXIMUM WARRANTY: 30 YEARS

PVC

DETAIL NO.

U - 5A

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated