
9A MECHANICAL TERMINATION WITH COUNTER FLASHING



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)


METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).

THREADED FASTENERS OR CARLISLE HP TERM BAR NAIL-IN. 6"(15cm) O.C. FASTENING RECOMMENDED.

CARLISLE TERMINATION BAR

WARRANTY UP TO 30 YEARS | SEE INSET A

9B MECHANICAL TERMINATION




CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)

CARLISLE HP TERM BAR NAIL-IN. 6"(15cm) O.C. FASTENING RECOMMENDED.

CARLISLE TERMINATION BAR

WARRANTY UP TO 20 YEARS | SEE INSET A


INSET A

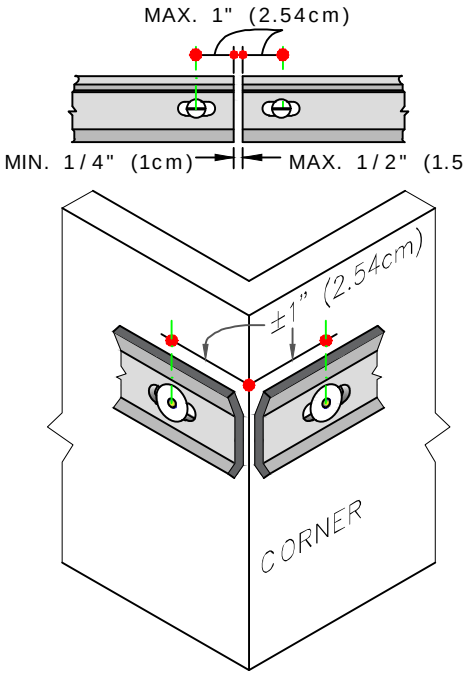

NOTES:

1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
2. DO NOT WRAP TERMINATION BAR AROUND CORNERS.
3. DETAIL 9D MUST BE USED AT VERTICAL JOINTS IN PANEL WALLS.

9C COUNTER FLASHING TERMINATION



CARLISLE UNIVERSAL SINGLE-PLY SEALANT OR SEALANT (BY OTHERS)

METAL COUNTER-FLASHING WITH LEAD WEDGES, AS REQUIRED (BY OTHERS).

FASTEN MEMBRANE @ 12" (30cm) O.C. MAX. USE GALVANIZED WASHERS, MIN. 1", (2.54cm) DIAMETER

NOTE:

1. WHEN MECHANICAL FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR CAULK THE FASTENER HEADS.

WARRANTY UP TO 10 YEARS

APPLICABLE BONDING ADHESIVE

xxx WATER CUT-OFF MASTIC - MUST BE HELD UNDER CONSTANT COMPRESSION.

CARLISLE SYNTEC SYSTEMS

MEMBRANE TERMINATIONS (PAGE 1 OF 3)

WARRANTY AS NOTES FOR EACH DETAIL

PVC

DETAIL NO. U - 9

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated