
GUIDELINES FOR ROOF PERIMETER ZONES FOR MECHANICALLY ATTACHED ROOF SYSTEM


PERIMETER ZONES

SAME LEVEL ROOF




GREATER THAN 10 FT (3m)

SPLIT LEVEL ROOFS




LESS THAN 10 FT (3m)

CANOPY ROOF




INSTALL PERIMETER SHEETS OVER THE ENTIRE OVERHANG (PROJECTION ROOF) AREA, EXTENDING ONTO THE MAIN ROOF DECK WHEN AT THE SAME LEVEL AS SHOWN.

LARGE OPENINGS OR LOADING DOCKS

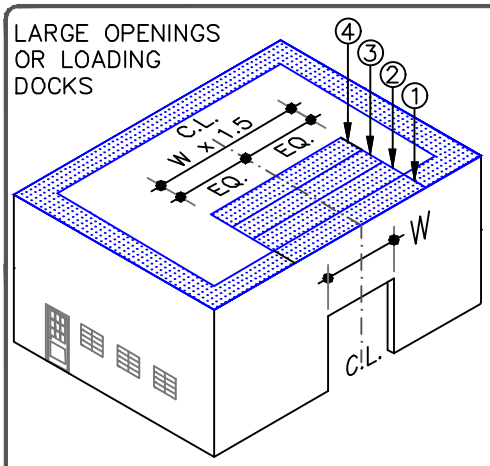

4 PERIMETER SHEETS CENTERED OVER LARGE OPENINGS

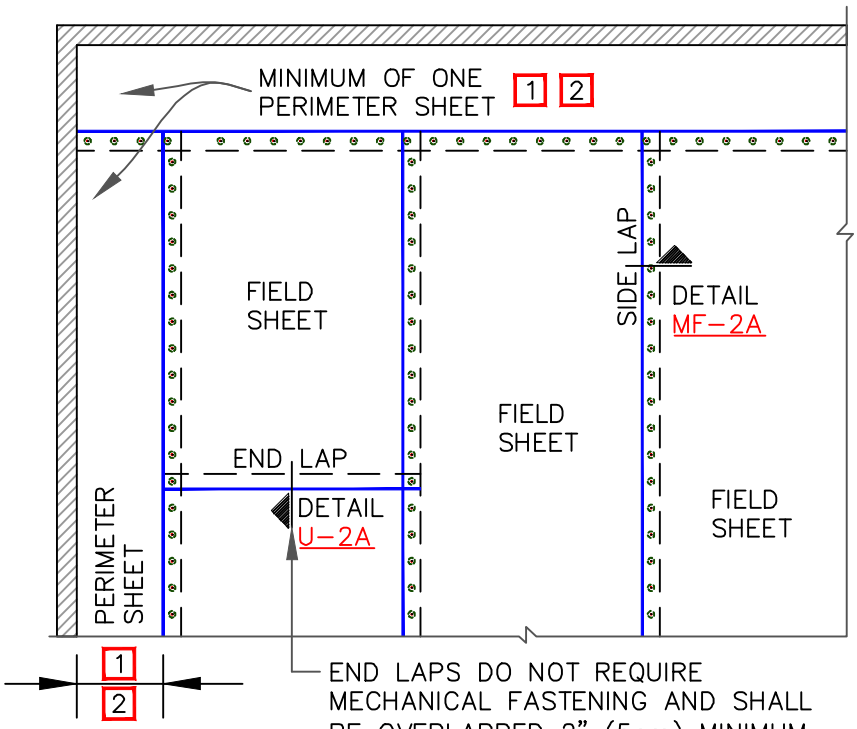

END LAPS DO NOT REQUIRE MECHANICAL FASTENING AND SHALL BE OVERLAPPED 2" (5cm) MINIMUM.

NOTES:

1. PERIMETER SHEETS:

   1.1. WHEN USING 10' (3m) OR 12' (3.7m) WIDE FIELD SHEETS, 6' (1.8m) WIDE PERIMETER SHEETS ARE UTILIZED.

   1.2. WHEN USING 8' (2.4m) WIDE FIELD SHEETS, 4' (1.2m) WIDE PERIMETER SHEETS ARE UTILIZED.

2. REFER TO CARLISLE SPECIFICATIONS FOR REQUIRED NUMBER OF PERIMETER SHEETS, SHEET WIDTH AND MEMBRANE FASTENING SPACING.

CARLISLE SYNTEC SYSTEMS

MEMBRANE SECUREMENT

MAXIMUM WARRANTY: 30 YEARS

TPO

DETAIL NO.

MF-2

MF (Mechanically Fastened) Detail

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated