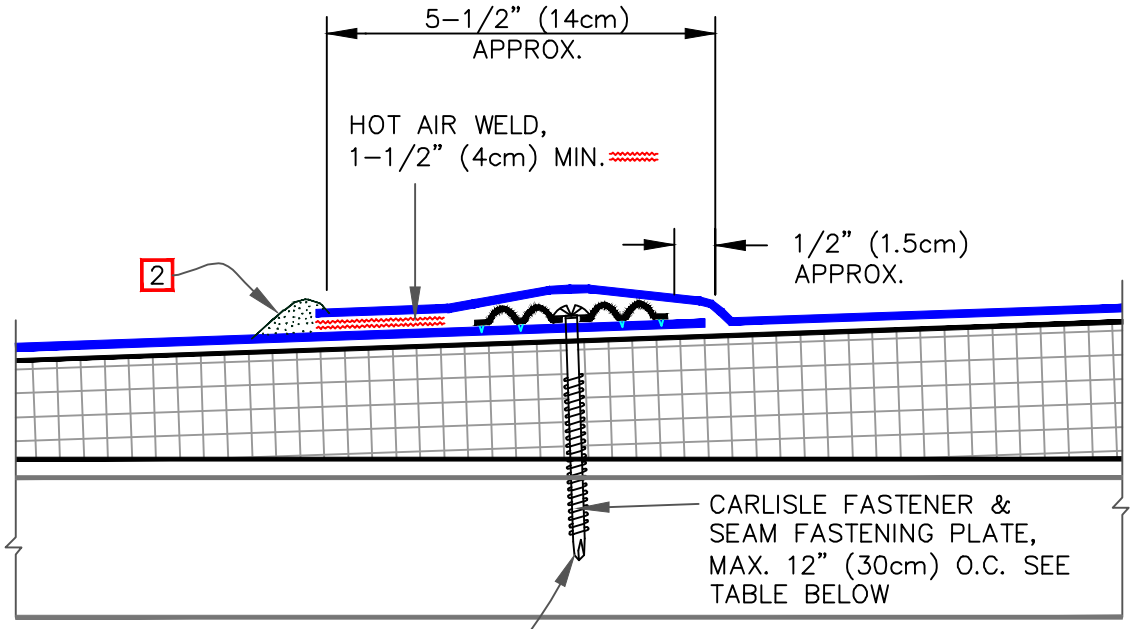



FASTENER & PRESSURE PLATE TYPES FOR DIFFERENT ROOF DECKS

DECK TYPE	OPTION	FASTENER	PLATE
STEEL OR WOOD	A	HP–X	PIRANHA
	B	HP–XTRA	PIRANHA XTRA
STRUCTURAL CONCRETE	A	CD–10	PIRANHA
	B	HD 14–10	PIRANHA

NOTES:

1. POSITION SEAM FASTENING PLATES BEYOND NON–REINFORCED ENCAPSULATED EDGE.
2. APPROXIMATELY 1/8" (0.5cm) DIAMETER BEAD OF CUT–EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE.

WHEN USING 60 OR 80-MIL (1.52/2.03mm) THICK MEMBRANE
APPLY A 4–1/2" (11.8cm) DIAMETER "T–JOINT" COVER AT FIELD SPLICE INTERSECTIONS, CENTRALLY ALIGNED.

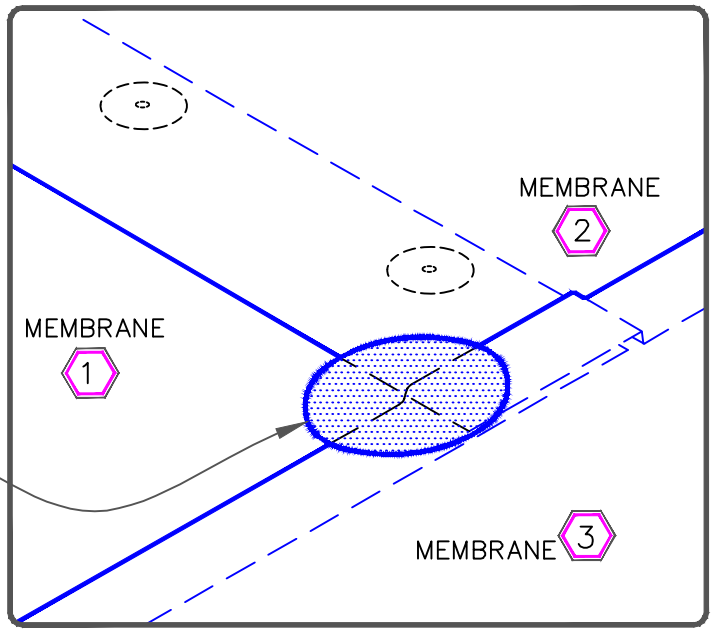

CARLISLE SYNTEC SYSTEMS

MECHANICALLY FASTENED SEAM, PAGE 1 OF 2

MAXIMUM WARRANTY: 30 YEARS


TPO


DETAIL NO.
MF–2A
MF (Mechanically Fastened) Detail

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated

FASTENER & PRESSURE PLATE TYPES FOR DIFFERENT ROOF DECKS

DECK TYPE	OPTION	FASTENER	PLATE
STEEL OR WOOD	A	HP–X	PIRANHA
	B	HP–XTRA	PIRANHA XTRA
STRUCTURAL CONCRETE	A	CD–10	PIRANHA
	B	HD 14–10	PIRANHA

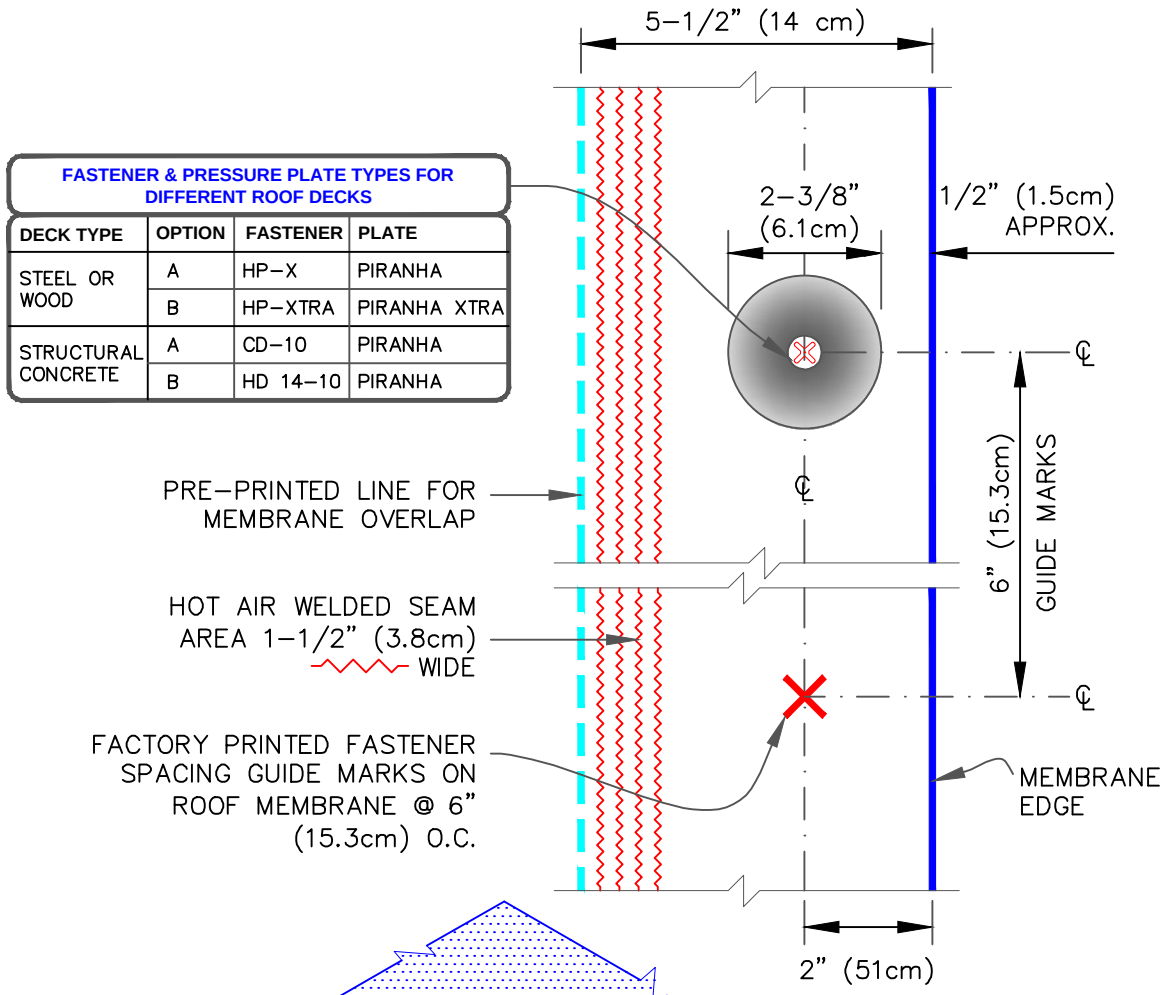

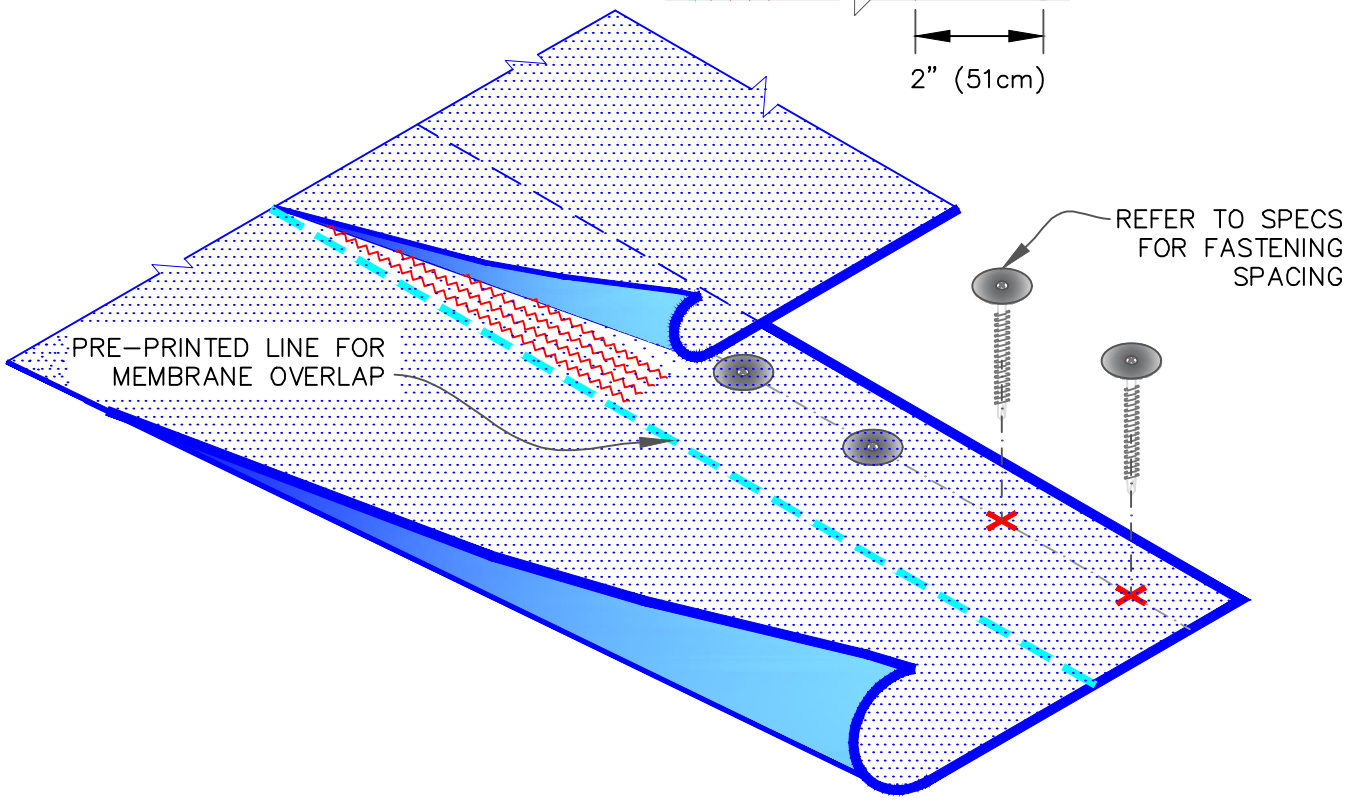

CARLISLE SYNTEC SYSTEMS

MECHANICALLY FASTENED SEAM, PAGE 2 OF 2

MAXIMUM WARRANTY: 30 YEARS

TPO

DETAIL NO. MF–2A

MF (Mechanically Fastened) Detail

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated