
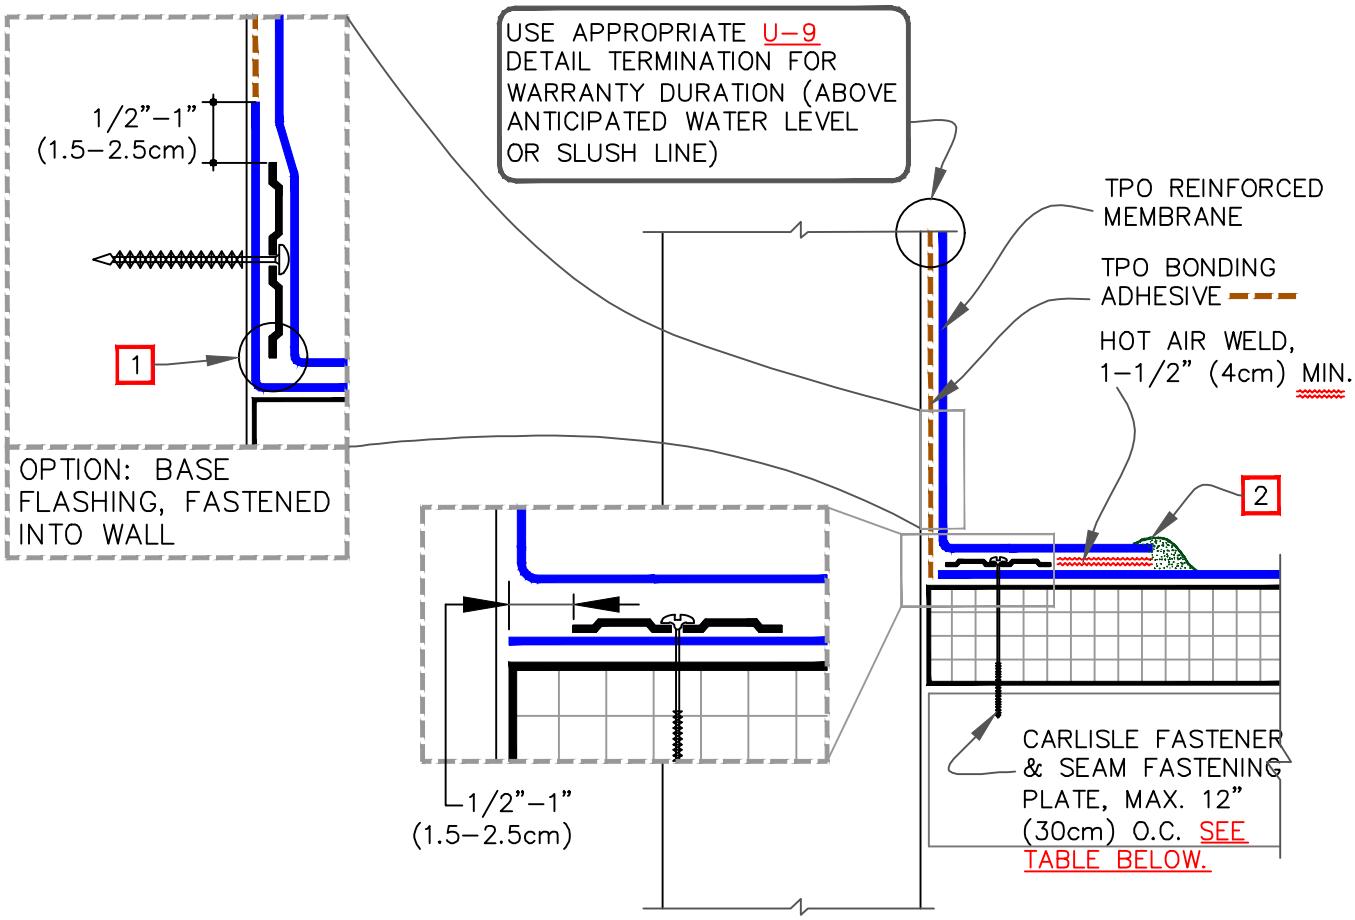


FASTENER & PRESSURE PLATE TYPES FOR DIFFERENT ROOF DECKS

DECK TYPE	OPTION	FASTENER	PLATE
STEEL OR WOOD	A	HP–X	PIRANHA
	B	HP–XTRA	PIRANHA XTRA
STRUCTURAL CONCRETE	A	CD–10	PIRANHA
	B	HD 14–10	PIRANHA

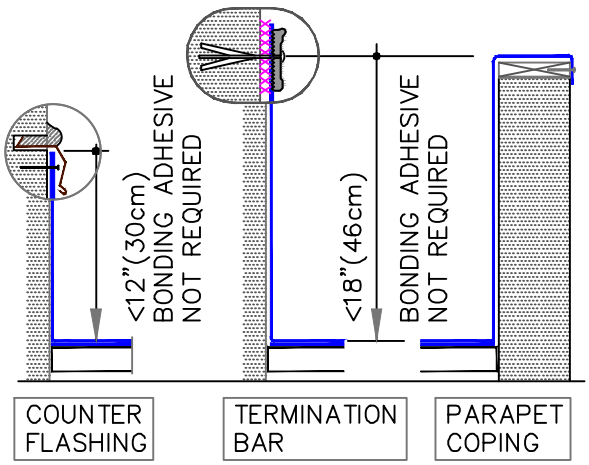

NOTES:

1. CARE MUST BE TAKEN TO PRESS THE MEMBRANE TIGHTLY INTO THE ANGLE CHANGE. PLACING THE PLATES TIGHT INTO THE ANGLE CHANGE WILL HELP HOLD THE MEMBRANE IN THE PROPER POSITION.

2. APPROXIMATELY 1/8" (0.5cm) DIAMETER BEAD OF CUT–EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE.

CARLISLE SYNTEC SYSTEMS

PARAPET BASE FLASHING: FASTENED INTO DECK OR WALL

MAXIMUM WARRANTY: 30 YEARS

TPO

DETAIL NO. U–12A

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated