


60–MIL (1.52mm) THICK TPO, UNIVERSAL CORNERS CAN BE USED FOR 3 DIFFERENT CORNER CONDITIONS AS SHOWN BELOW

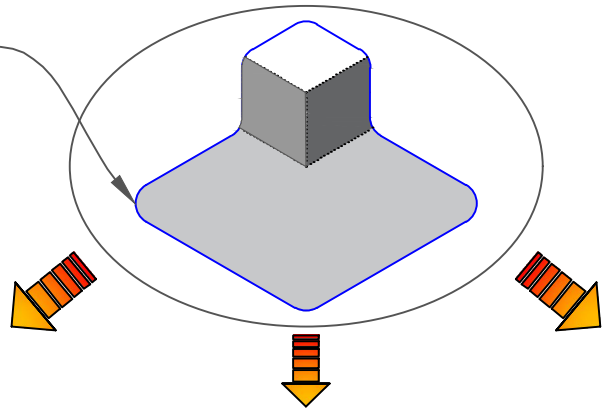


OPTION A

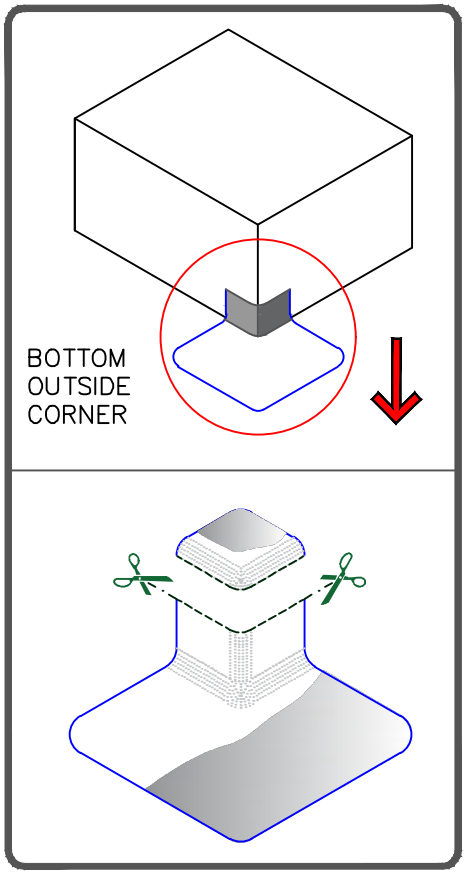

OPTION B

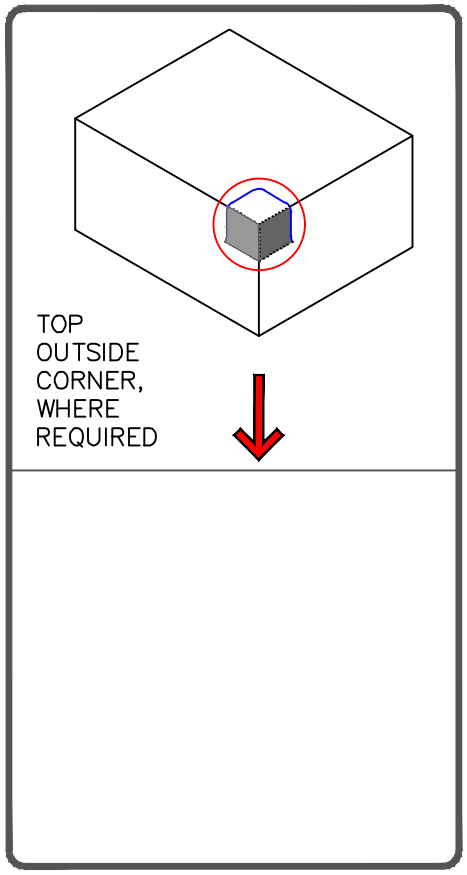


OPTION C

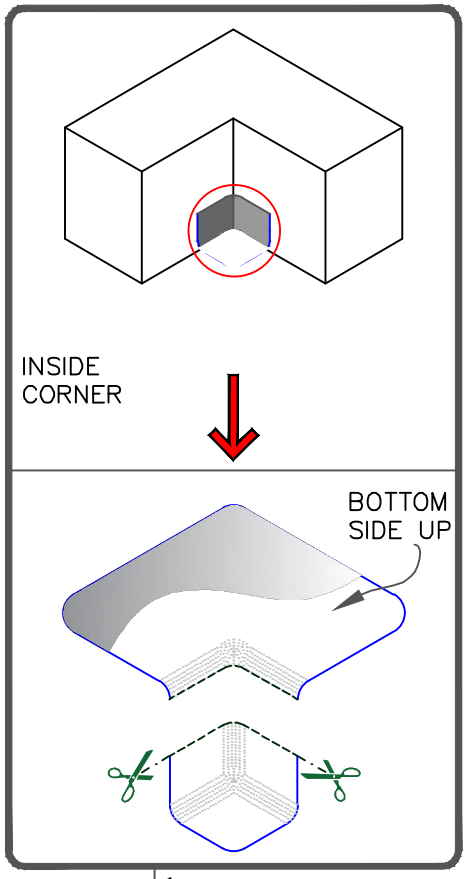

NOTES:

1. ROOF SYSTEMS MUST NOT HAVE FIELD FABRICATED OR BUILT–IN CANT STRIP.
2. REFER TO TECHNICAL DATA BULLETINS FOR COLOR AVAILABILITY.

TYPICAL DIMENSIONS

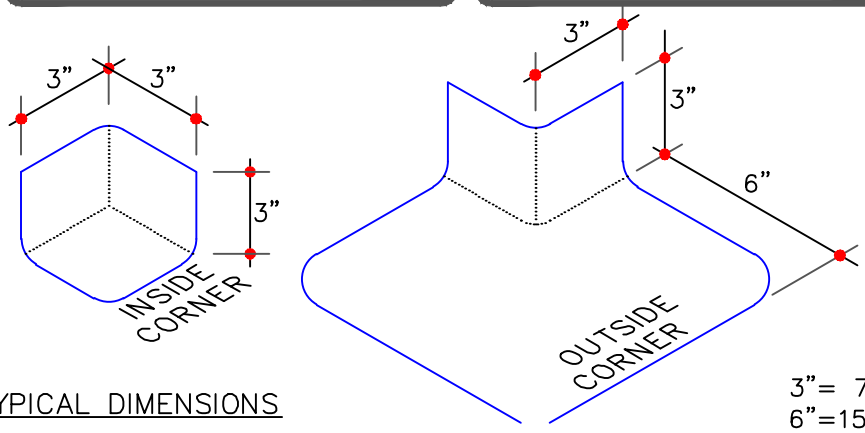

3”= 7.5cm
6”=15cm

CARLISLE SYNTEC SYSTEMS

TPO UNIVERSAL CORNERS–COMBINATION INSIDE & OUTSIDE CORNERS

MAXIMUM WARRANTY: 30 YEARS

TPO

DETAIL NO. U–15G

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated