



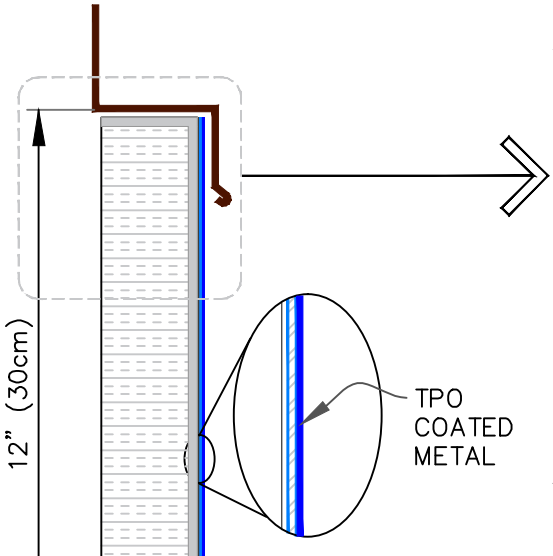


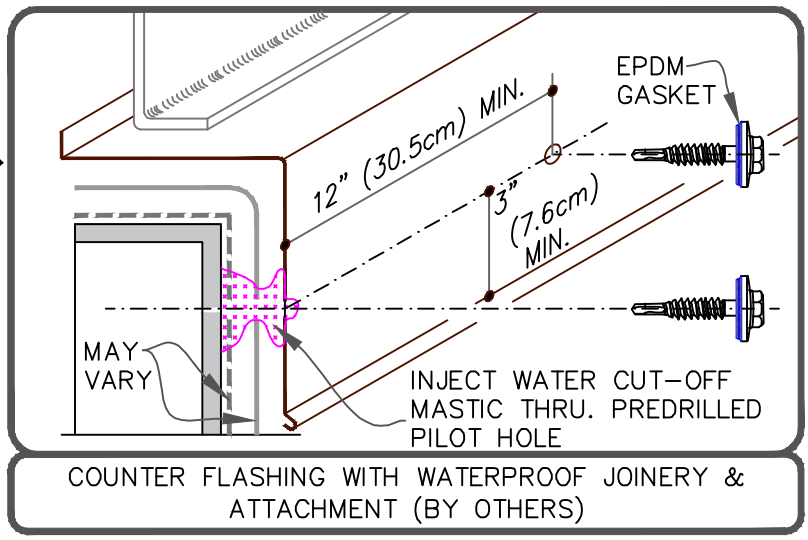


COUNTER FLASHING WITH WATERPROOF JOINERY & ATTACHMENT (BY OTHERS)

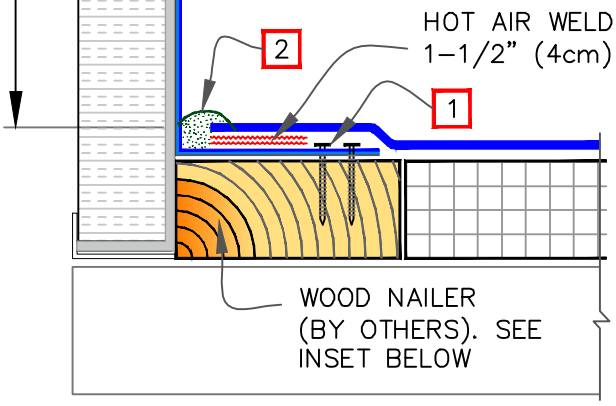



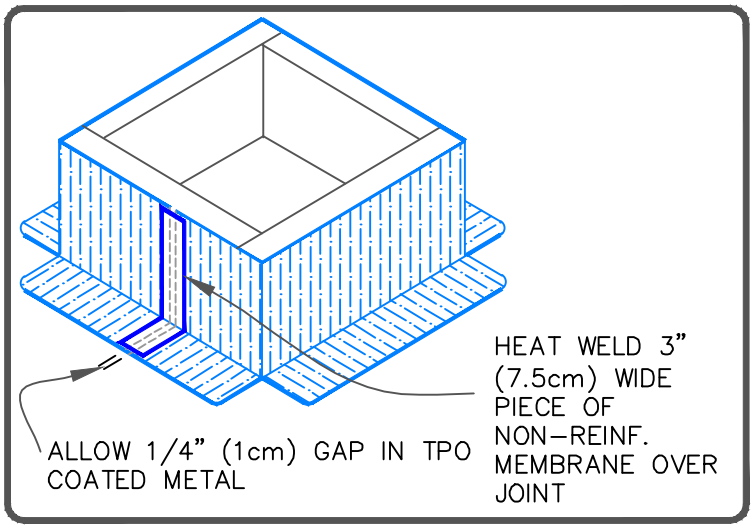

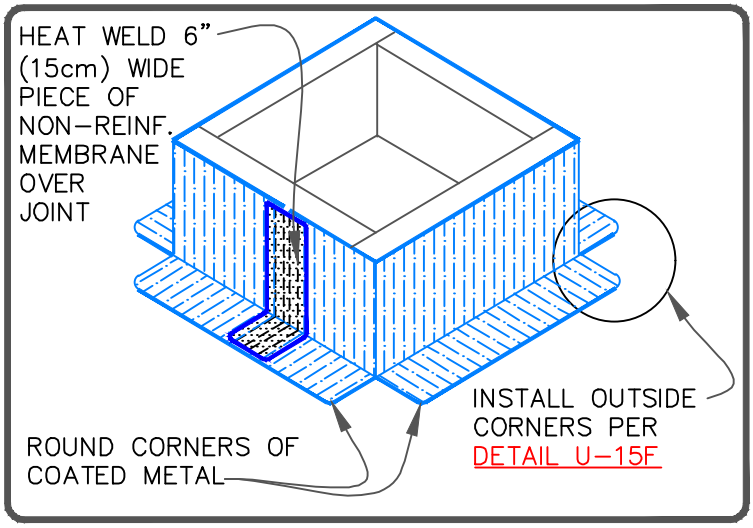

NOTES:

1. FASTEN COATED METAL USING 1-1/2" (38mm) MIN. RING SHANK NAILS AT 6" (15cm) STAGGERED APPROX. 1/2" (1.5cm).
2. APPROXIMATELY 1/8" (0.5cm) DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE.

CARLISLE SYNTEC SYSTEMS

CURB FLASHING WITH TPO COATED METAL

MAXIMUM WARRANTY: 30 YEARS

TPO

DETAIL NO. U-5B

U (Universal Detail)

© 2026 CARLISLE SynTec a division of CARLISLE Construction Materials Incorporated