

**Automatic Modeling of Machining Processes**  
**[DRAFT]**

by

Chetan Sharma

B.S., Massachusetts Institute of Technology (2019)

Submitted to the Department of Electrical Engineering and Computer  
Science

in partial fulfillment of the requirements for the degree of

Master of Science in Computer Science and Engineering

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

September 2020

© Massachusetts Institute of Technology 2020. All rights reserved.

Author .....  
Department of Electrical Engineering and Computer Science  
September 4, 2020

Certified by .....  
Neil Gershenfeld  
Director & Professor at Center for Bits and Atoms  
Thesis Supervisor

Accepted by .....  
Andrew B. Lippman  
Chairman, Department Committee on Graduate Theses



# **Automatic Modeling of Machining Processes [DRAFT]**

by

Chetan Sharma

Submitted to the Department of Electrical Engineering and Computer Science  
on September 4, 2020, in partial fulfillment of the  
requirements for the degree of  
Master of Science in Computer Science and Engineering

## **Abstract**

3 axis CNC milling is a ubiquitous manufacturing method in industry due to its versatility and precision. The fundamental parameters that dictate cutting performance ("speeds, feeds, and engagement") must be manually set by the machine programmer; proper operation therefore relies heavily on operator skill. In this thesis, an intelligent CNC controller is presented that uses low-cost sensors to fit an analytical model of cutting forces. The analytical nature of this model allows for favorable convergence characteristics and low computational costs. This analytical model is used to optimize cutting feeds for future movements; as more data is collected, the model continuously reinforced. This intelligent controller therefore abstracts out some of the complexities of machining and makes the process more approachable.

Thesis Supervisor: Neil Gershenfeld

Title: Director & Professor at Center for Bits and Atoms



## Acknowledgments

A large thanks goes to my mentor Jake Read and the many researchers at the Center for Bits and Atoms. Being surrounded by brilliant scientists was as inspiring as it was intimidating!

An additional thanks goes to Ted Hall from Shopbot for providing me with CNC equipment during the COVID-19 crisis. This thesis would be strictly impossible without his help.

One more thanks goes to the Yang family for providing me with a place to live during the crisis; their kindness cannot be understated.

A final thanks goes to the numerous geckos that inhabited my garage workshop while I worked on my thesis. They contributed nothing, but they were very cute.



# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction</b>   | <b>13</b> |
| 1.0.1    | The Value of Abstraction . . . . .                          | 13        |
| 1.0.2    | Difficulties Associated with Milling Abstractions . . . . . | 14        |
| 1.0.3    | Self-Improving Analytical Model-Based Controllers . . . . . | 15        |
| 1.0.4    | The Value of Simplicity . . . . .                           | 15        |
| 1.1      | Background . . . . .  | 16        |
| 1.1.1    | Milling Models . . . . .                                    | 16        |
| 1.1.2    | Feed Rate Scheduling . . . . .                              | 17        |
| 1.1.3    | Feedback . . . . .  | 17        |
| 1.1.4    | Process Optimization / Failure . . . . .                    | 18        |
| 1.2      | Prior Work . . . . .  | 18        |
| <b>2</b> | <b>Proposed System</b>                                      | <b>21</b> |
| 2.1      | The Milling Model . . . . .                                 | 22        |
| 2.2      | Regression . . . . .  | 25        |
| 2.3      | Failure Models . . . . .                                    | 26        |
| 2.3.1    | Deflection Model . . . . .                                  | 26        |
| 2.3.2    | Tool Breakage Model . . . . .                               | 28        |
| 2.3.3    | Spindle Load Model . . . . .                                | 28        |
| 2.4      | Optimization . . . . .                                      | 29        |
| 2.5      | Model Bootstrapping and Data Persistence . . . . .          | 29        |
| 2.6      | Hardware . . . . .  | 31        |
| 2.6.1    | Torque Sensor . . . . .                                     | 32        |

|          |                                 |           |
|----------|---------------------------------|-----------|
| 2.6.2    | Uniaxial Tool Force Dynamometer | 32        |
| <b>3</b> | <b>Evaluation</b>               | <b>35</b> |
| 3.0.1    | Experimental Setup              | 35        |
| 3.1      | Model Fit Performance           | 36        |
| 3.2      | Optimization Performance        | 36        |
| 3.3      | System Adaptability             | 36        |
| <b>4</b> | <b>Conclusion</b>               | <b>43</b> |
| 4.1      | Future Work                     | 43        |
| 4.1.1    | Modeling Improvements           | 43        |
| 4.1.2    | Workflow Improvements           | 44        |
| 4.2      | Final Thoughts                  | 44        |

# List of Figures

|     |   |    |
|-----|---|----|
| 1-1 | Traditional Machining Workflow . . . . .                                  | 14 |
| 1-2 | Machining workflow described in this work . . . . .                       | 16 |
| 2-1 | Diagram of the flat-milling process . . . . .                             | 22 |
| 2-2 | Diagram of milling forces . . . . .                                       | 24 |
| 2-3 | Diagram of an endmill. See table 2.1 for variable definitions . . . . .   | 27 |
| 2-4 | Diagram of bootstrapping process . . . . .                                | 30 |
| 2-5 | Machine used for experimentation . . . . .                                | 31 |
| 2-6 | Tool force dynamometer implementation . . . . .                           | 33 |
| 2-7 | Servo-equipped spindle implementation . . . . .                           | 33 |
| 3-1 | Model fit for spindle torques . . . . .                                   | 37 |
| 3-2 | Model fit for cutting forces . . . . .                                    | 37 |
| 3-3 | Model fit for spindle torques when asked to extrapolate feeds above 0.004 | 38 |
| 3-4 | Model fit for cutting forces when asked to extrapolate feeds above 0.004  | 38 |
| 3-5 | Convergence of model to ground-truth data over successive cuts . . .      | 39 |
| 3-6 | Model fit after all cuts were made (i.e "in hindsight") . . . . .         | 39 |
| 3-7 | Convergence examples for successful tests . . . . .                       | 41 |
| 3-8 | Convergence examples for tests with notable aspects . . . . .             | 41 |



# List of Tables

|     |   |    |
|-----|---|----|
| 2.1 | Variable Definitions . . . . .                      | 23 |
| 3.1 | Materials tested & endmill diameters used . . . . . | 40 |



# Chapter 1

## Introduction

CNC<sup>1</sup> milling is a staple of modern manufacturing. Since its genesis at the MIT Servomechanisms laboratory, CNC milling has grown into a multi-billion dollar industry. The high accuracy and versatility of these machines enable them to be used in situations that call for complex geometry and tight tolerances. Process constraints are minimal compared to other manufacturing methods, so CNC milling machines find themselves being used in a variety of industries (mold-making, prototyping, aerospace, commercial products, etc) [1].

### 1.0.1 The Value of Abstraction

Abstraction is a key component of the growing personal fabrication movement. The complexity of creating anything can become overwhelming when the minutiae of its creation must be considered; removing this barrier lets creators focus on the "what" instead of the "how". Consider the recent spike in hobbyist FDM<sup>2</sup> 3D printing; by reducing fabrication to a "click-and-watch" process, 3D printers have enabled even novice makers to create most anything with basic fabrication knowledge [2].

Much of the CNC mill's versatility can be attributed to the strength of the abstraction they provide. The sequence of motions required to machine a part are typically

---

<sup>1</sup>Computer Numeric Control

<sup>2</sup>Fused Deposition Modeling; forming a part from thin strands of fused material

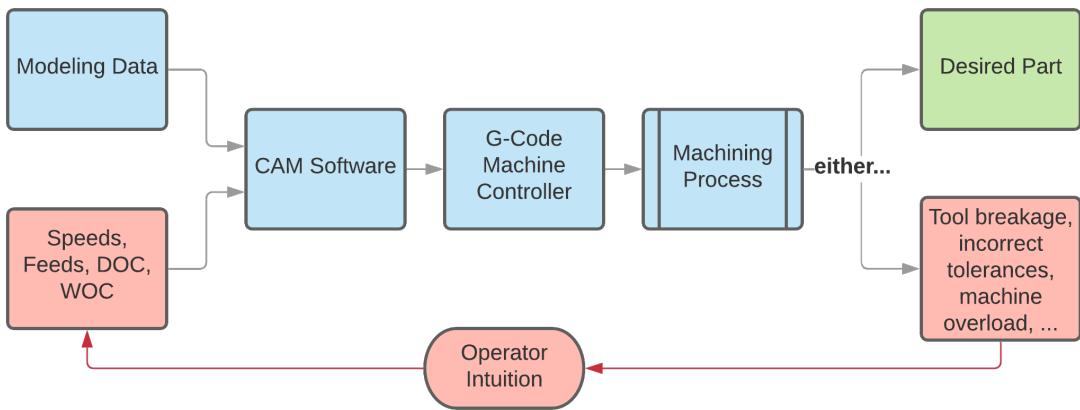


Figure 1-1: Traditional Machining Workflow

generated directly from a CAD<sup>3</sup> model using CAM software. In this software a user defines a tool to use, a feature to recreate on the model, and a few parameters that define how this is done. The software then translates these directives into G-Code<sup>4</sup> for the physical machine. In this sense, CNC milling provides a way of creating a functional object without worrying about the "how".

### 1.0.2 Difficulties Associated with Milling Abstractions

This abstraction, however, is highly imperfect. The complex nature of the milling process leaves many avenues for failure. Too high of a cutting speed can melt the material; too high of a feed rate can overpower the machine or snap the cutting tool. Modern CNC milling workflows leave these critical variables (speed, feed, engagement) as an exercise for the machine operator - and the operator, in turn, is left to rely on scant resources<sup>5</sup>, audible cues, and intuition. Modern CNC milling fails to abstract out human judgement and often places itself out of reach for the novice maker and inexperienced machinist alike.

The difficulty of abstracting out these variables comes from the natural inscrutability of the machining process. A complex mixture of thermal, tribological, static, and

---

<sup>3</sup>Computer Aided Design; an abstract computer representation of a physical part

<sup>4</sup>A basic text-based language used to provide instructions to CNC machines

<sup>5</sup>Tool manufacturers provide recommendations for feeds and speeds for each tool-material combination

dynamic mechanisms govern cutting. Tractable models of milling in academia rely on empirically determined constants. These constants are typically specific to only one tool-material combination and can vary with the cutting environment; the introduction of coolant or the use of a stiffer machine can result in entirely new values. With no way of obtaining these constants, CNC operators generally resort to using a combination of simpler heuristics and intuition to select parameters. A better solution is clearly in order.

### **1.0.3 Self-Improving Analytical Model-Based Controllers**

In this thesis, an intelligent machine controller is developed with the goal of abstracting out the complexities of parameter selection. Machining constraints are automatically determined using easily-measurable machine & tool properties. Feedback from a low-cost 1D tool-force dynamometer and a current-sensing spindle is used to fit cutting force coefficients to a simple analytical flat end-milling model in real time. This model is simultaneously used to estimate a feed rate that will maximize productivity while obeying the previously calculated constraints. This model-based feedback approach mimics what a human operator does. Intuition is replaced by a tractable mathematical model; audible and visible indications of "proper" machining are replaced by ground-truth sensor readings. This intelligent machine controller abstracts out some of the complexity of tuning machine parameters and permits the operator to treat the machine as more of a "black box".

### **1.0.4 The Value of Simplicity**

This thesis was completed during the COVID-19 pandemic in the absence of a real machine shop with limited funding. These conditions made simplicity an implicit requirement; complex mechanisms and sensors were simply unobtainable. While this thesis could not explore more refined testing and manufacturing methods, the completion of this system despite limited resources proves that intelligent controllers can be implemented without exotic hardware.

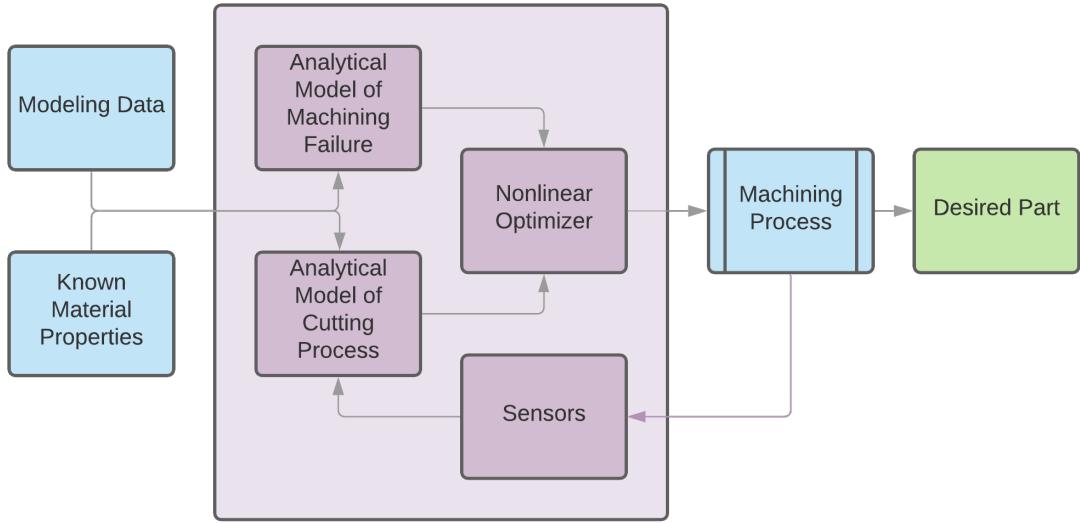


Figure 1-2: Machining workflow described in this work

## 1.1 Background

### 1.1.1 Milling Models

Both numerical and analytical models exist for predicting milling forces. While numerical models can achieve higher accuracy, the simplicity of the the analytical models makes them more suitable for this system.

Many models derive cutting forces from a relationship between uncut chip thickness<sup>6</sup> and radial/tangential cutting pressures. Integrating these pressures over the appropriate bounds along cutting edges yields cutting forces and torques as a function of time. Tool deflection, runout, and non-perpendicularity can be accounted for if desired.

Two common relationships between uncut chip thickness and cutting pressures are defined by the linear-edge-force model and the exponential-model. The linear-edge force model assumes that cutting pressures can be divided into a "cutting" component that varies linearly with chip thickness and an "edge" component that is unchanging. The exponential model is an expansion of the former wherein the cutting

---

<sup>6</sup>This refers to the thickness of a sliver of material as it is cut by a cutting tooth

force coefficients themselves vary exponentially with average chip thickness. All of these relationships are typically found through linear regressions on actual cutting data.

Budak et al. has described and verified the effectiveness of linear-edge force analytical models for end milling [3] [14]; due to their simplicity, they will be used for this work. Similar models exist for ball milling [13] and twist drilling [5], so the system described in this thesis can be adapted to other forms of tooling if additional models are devised.

### 1.1.2 Feed Rate Scheduling

When milling forces are known, they can be used to adjust feedrates as cutting conditions change. Feedrate scheduling refers to this practice; it is most often used to compensate for a fluctuating level of tool engagement. Scheduling, however, requires an accurate model that relates cutting conditions to process outputs. These models rely on empirical coefficients that are specific to each material / tool, so scheduling is limited to applications where the cost of collecting these coefficients can be justified.

### 1.1.3 Feedback

Feedback from sensors can be used to perform feedrate scheduling in response to actual cutting conditions. Traditional PI-controllers have been used, but they can struggle to cope with rapidly changing process inputs without a feedforward element. More advanced controllers utilize learning-based controllers to respond to these changes faster. Fuzzy controllers, GA-based controllers, and ANN controllers have been explored in other works [10].

Force feedback is typically obtained from a commercial piezoelectric tool-force dynamometer. While accurate, these devices are expensive; they must exhibit high stiffness and avoid cross-coupling between axes. Production machines lack this instrumentation for reasons of cost and robustness.

Spindle-load based feedback has been used with some success. K. Dunwoody uses

spindle-load measurements directly from a commercial machine to estimate cutting force coefficients [4]. D. Kim et al. uses raw current readings from a hall-effect board paired with an empirically-found relation to find cutting torques [6]. Finding feed-axis cutting forces through motor currents has proven to be more difficult due to the complex tribology associated with way motion.

#### 1.1.4 Process Optimization / Failure

A typical objective in milling is to remove material at the maximum permitted rate while avoiding tool / machine failure. Failure modes for tooling include tool breakage (governed by brittle failure laws in carbide tooling), tool deflection (governed by static mechanics), and spindle failure (governed by the motor driving the spindle). Other failure mechanisms such as overheating and regenerative chatter also exist but will be considered out-of-scope for this thesis.

J.A Nemes et al. [11] obtained the Weibull parameters for carbide tool fracture; those parameters will be used in this work. Calculating endmill deflection can be difficult due to the complex geometry present. Simplified models have been proposed as alternatives. One work found that an endmill's fluted portion can be approximated by a cylinder with 80% of its diameter. Another used FEA data to create a simplified empirical formula to describe deflections more accurately [9] [7].

## 1.2 Prior Work

Systems described by both U. Zuperl et al. and D. Kim use a fuzzy logic controller to schedule feedrates in real-time [15] [6]. In both implementations, hand-picked fuzzy logic rules are used to convert measured force errors to feed commands. While these controllers are stable, they do not employ feedforward predictions and therefore require finite time to respond to force changes [6]. Some degree of operator skill is also required to build and tune the controller.

U. Zuperl et al. also uses a feedforward neuro-fuzzy system in a separate publication [16]. A neuro-fuzzy model of cutting and a ANFIS model of tool flank wear are

used to find optimal feedrates. Data from the cutting process is then used to correct for errors in force by means of a separate neural controller. This architecture, while highly accurate, incurs a great deal of complexity and requires expensive sensors for data collection. Its implementation is therefore limited to higher-end machines.

All of the above systems model the cutting process by means of a universal function approximator. These approximators are not guaranteed to capture the exact relationship between input and output variables; while this is acceptable when interpolating between captured data points, it becomes more problematic when the system is asked to extrapolate. A large quantity of data is required to bootstrap a function approximator and ensure that the model does not diverge from the ground-truth at extreme values.



# Chapter 2

## Proposed System

This machining system consists of four interoperating components:

- An analytical model of the milling process
- An analytical model of milling failure
- A nonlinear optimizer
- A milling machine instrumented with sensors

The analytical model of the milling process is parameterized by coefficients specific to the tool-material combination being used; it relates cutting conditions to cutting torques & forces. The analytical model of failure uses the force model's output to calculate if the milling process will fail. The nonlinear optimizer uses both of these models to find cutting parameters that will result in the highest MMR while keeping milling forces within safe limits. These cutting parameters are given to the path planner & machine; the resulting cutting torques & forces are captured by sensors and used to improve the coefficients defining the milling model. This cycle allows cutting parameters to be optimized with a self-improving model.

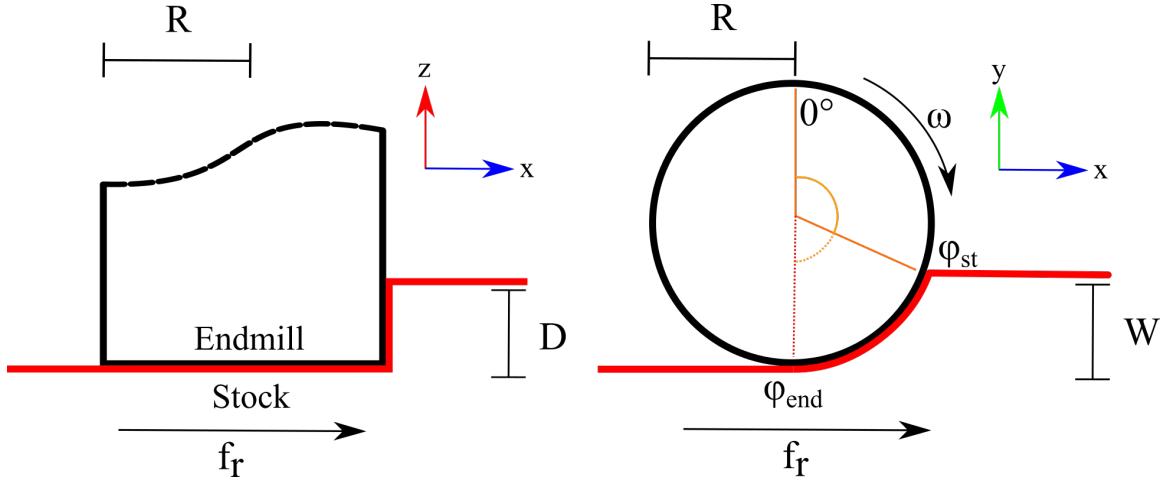


Figure 2-1: Diagram of the flat-milling process

## 2.1 The Milling Model

A model is required that relates fundamental cutting parameters to average radial force vectors and cutting torques. This model will be formed under the assumption that a flat-nose helical endmill is being used for climb machining. Figure 2-1 and table 2.1 describe key variables. Similar models exist for ball-nose machining but will not be considered in this work [13].

The linear-edge force model will be used in this work. This choice is motivated by multiple factors:

- The model is purely analytical and can be evaluated without costly numerical methods. This makes it possible to implement this system with less computational overhead.
- Despite its simplicity, the model describes average torques and forces well enough for effective optimization.
- The model is linear, so familiar linear regression techniques can be applied to improve its performance.
- The model has very few parameters and converges much faster than its function-approximator counterparts.

|                  |  |
|------------------|--|
| $R$              | Radius of cutter                               |
| $R_s$            | Radius of shank                                |
| $l_c$            | Length of cutter                               |
| $l_s$            | Length of shank                                |
| $N$              | Number of teeth                                |
| $D$              | Depth of cut                                   |
| $W$              | Width of cut                                   |
| $f_r$            | Feedrate                                       |
| $\omega$         | Cutter rotational speed                        |
| $\phi_{st}$      | Tooth entry angle                              |
| $\phi_{end}$     | Tooth exit angle                               |
| $f_t$            | Feed per tooth                                 |
| $t_{chip}$       | Uncut chip thickness                           |
| $K_{tc}, K_{rc}$ | Tangential / radial cutting force coefficients |
| $K_{te}, K_{re}$ | Tangential / radial edge force coefficients    |

Table 2.1: Variable Definitions

In this model, cutting forces are derived from radial and tangential pressures that develop along cutting edges (see figure 2-2). One component of these cutting pressures varies linearly with uncut chip thickness and is associated with the energy needed to deform the chip; the other component does not and is associated with the energy needed to force a imperfect cutter edge through the material. Axial cutting pressures will be ignored as they do not have a significant impact on the milling process.

The uncut chip thickness varies with  $\phi$  and the feed per tooth. This quantity is linearly related to cutting pressures:

$$\begin{aligned}
 t_{chip} &\approx f_t \cos \phi = \frac{2\pi f_r}{N\omega} \cos \phi \\
 dF_t &= (K_{tc}t_{chip} + K_{te}) \begin{bmatrix} -\cos \phi \\ \sin \phi \end{bmatrix} \\
 dF_r &= (K_{rc}t_{chip} + K_{re}) \begin{bmatrix} -\sin \phi \\ -\cos \phi \end{bmatrix}
 \end{aligned}$$

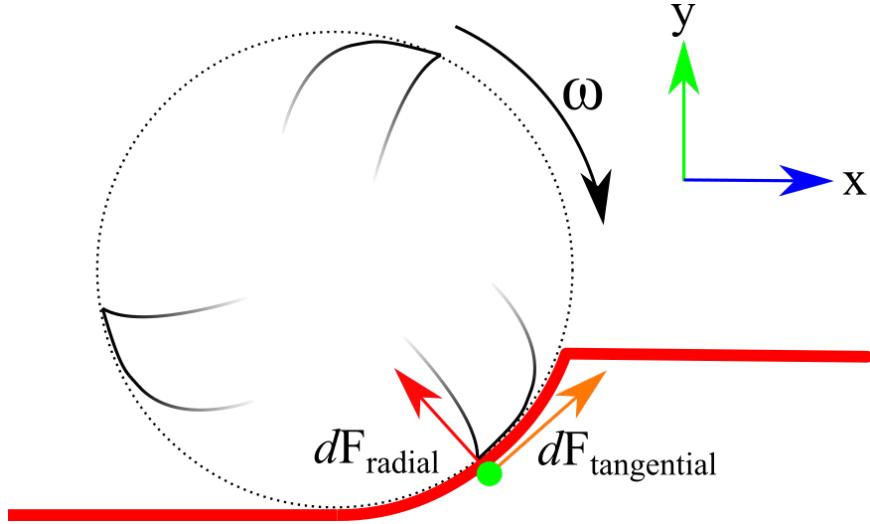


Figure 2-2: Diagram of milling forces

For climb cutting,  $\phi_{st}$  and  $\phi_{end}$  take on the values:

$$\begin{aligned}\phi_{st} &= \pi - \arccos\left(1 - \frac{W}{R}\right) \\ \phi_{end} &= \pi\end{aligned}$$

The average torque induced in the cutter is equal to the integral of the tangential cutting pressures of the teeth that are in contact with the workpiece. Radial cutting pressures make no contributions to torque:

$$\begin{aligned}\tau &= \frac{DNR}{2\pi} \int_{\phi_{st}}^{\phi_{end}} K_{te} + K_{tc} f_t \sin(\phi) \\ &= \frac{DN R}{2\pi} \left( K_{te} \cos\left(1 - \frac{W}{R}\right) + \frac{K_{tc} W f_t}{R} \right)\end{aligned}$$

Contributions from both tangential cutting pressures and radial cutting pressures need to be combined in order to find cutting forces. The following integral describes forces along X and Y:

$$F = \frac{DN}{2\pi} \int_{\phi_{st}}^{\phi_{end}} dF_t + dF_r$$

These equations leave us with four unknown coefficients:  $K_{tc}$ ,  $K_{te}$ ,  $K_{rc}$ , and  $K_{re}$ .

These coefficients vary with the cutting stock's material and the tool's coating, but they do not vary with the tool's flute count or diameter.

## 2.2 Regression

The expressions for  $F_x$  and  $F_y$  share the same coefficients so only one of these force components needs to be used for regression. The model described above has the convenient property of being linear with respect to its coefficients. Because of this, the equations for average torque and average force along the  $y$  axis can be simplified to the following:

$$\begin{aligned} \begin{bmatrix} \tau & F_y \end{bmatrix} &= \begin{bmatrix} K_t c & K_t e & K_r c & K_r e \end{bmatrix} \begin{bmatrix} X_{\tau 1} & X_{F_y 1} \\ X_{\tau 2} & X_{F_y 2} \\ X_{\tau 3} & X_{F_y 3} \\ X_{\tau 4} & X_{F_y 4} \end{bmatrix} \\ \begin{bmatrix} X_{\tau 1} \\ X_{\tau 2} \\ X_{\tau 3} \\ X_{\tau 4} \end{bmatrix} &= \begin{bmatrix} \frac{D N W f_t}{2 \pi} \\ \frac{D N R \cos(1 - \frac{W}{R})}{2 \pi} \\ 0 \\ 0 \end{bmatrix} \\ \begin{bmatrix} X_{F_y 1} \\ X_{F_y 2} \\ X_{F_y 3} \\ X_{F_y 2} \end{bmatrix} &= \begin{bmatrix} \frac{D N f_t (W^{3/2} \sqrt{2 R - W} + R^2 \cos(\frac{R - W}{R}) - R \sqrt{W} \sqrt{2 R - W})}{4 R^2 \pi} \\ \frac{D N W}{2 R \pi} \\ \frac{D N W f_t (2 R - W)}{4 R^2 \pi} \\ \frac{D N \sqrt{W} \sqrt{2 R - W}}{2 R \pi} \end{bmatrix} \end{aligned}$$

Standard L2 linear regression can then be used to find the coefficient's values. Since the equations for torque and force share the same set of coefficients, data from both can be used simultaneously in the same regressor (provided that both are rescaled to be closer in magnitude).

## 2.3 Failure Models

There are multiple ways in which the milling process commonly fails:

- Tool breakage
- Excessive deflection
- Spindle overload
- Tool overheating / material melting
- Excessive regenerative chatter
- Premature tool wear

This system is limited to predicting failure modes that can be derived from torque and force. Tool wear and heat generation are dictated by complex tribological processes while regenerative chatter requires a detailed model of the machine's frequency response; only the first three listed items will be considered in this work.

### 2.3.1 Deflection Model

Deflection during the cutting process leads directly to dimensional errors in the finished part. The complex geometry of an endmill's flutes can make it difficult to analytically find deflection under load. Calculations can be simplified by approximating the fluted portion as a cylinder that is 80% of the cutter's radius [8]. With this assumption in hand, the endmill can be analyzed as a simple cantilevered beam with a step in diameter. Cutting forces will be reduced to a point load at a distance of  $\frac{1}{2}D$  from the tip. Deflections along X are aligned with the feed direction and do not contribute to form errors, so deflections along Y will be of primary interest.

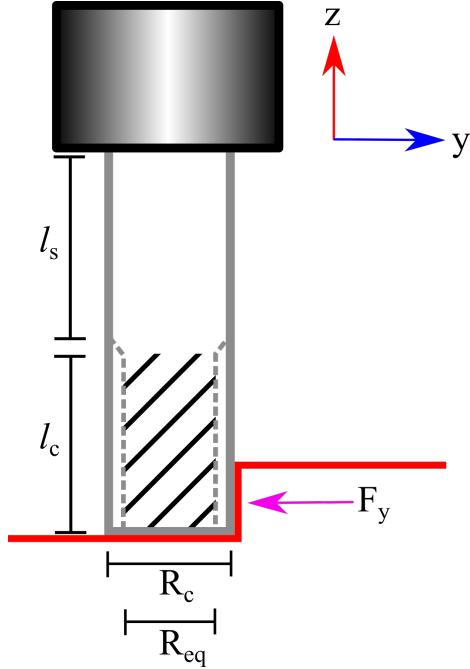


Figure 2-3: Diagram of an endmill. See table 2.1 for variable definitions

$$\begin{aligned}
 I_c &\approx \frac{\pi(0.8R_c)^4}{4} \\
 I_s &= \frac{\pi R_s^4}{4} \\
 M_s &= F_y(l_c - \frac{D}{2}) \\
 \theta_s &= \frac{2M_s l_s + F_y l_s^2}{2EI_s} \\
 \delta_s &= \frac{3M_s l_s^2 + 2F_y I_s^3}{6EI_s} \\
 \delta_c &= \frac{F_y(l_c - \frac{D}{2})^2(2l_c + \frac{D}{2})}{6EI_c} + \delta_s + \theta_s l_c
 \end{aligned}$$

Deflection can also come from the machine itself. Linear-elastic deflections are easy to measure (e.g with a dial indicator), so we will approximate machine deflections in this fashion:

$$\delta_{total} = \delta_c + \frac{F_y}{K_{machine}}$$

### 2.3.2 Tool Breakage Model

Modern flat endmills are made from cemented carbide and behave like a brittle solid. Tool fracture probabilities can therefore be approximated by a Weibull distribution over peak stresses. The Weibull CDF takes the following form:

$$P_{frac} = 1 - e^{-(\frac{\sigma_{max}}{\lambda})^k}$$

Drawing from experiments run by J.A Nemes et al. [11],  $\lambda$  and  $k$  will be assigned values  $1566 \times 10^6$  MPa and 5.64 respectively.  $\sigma_{max}$  will appear either at the boundary between the cutter and shank or at the boundary between the shank and the collet. The simplifying assumptions used for tool deflection can be applied again to find these stresses.

$$\begin{aligned}\sigma_{cut,sh} &= \frac{||\mathbf{F}||R_c(l_c - \frac{D}{2})}{I_c} \\ \sigma_{sh,col} &= \frac{||\mathbf{F}||R_s(l_c + l_s - \frac{D}{2})}{I_s}\end{aligned}$$

### 2.3.3 Spindle Load Model

Conditions that result in spindle overload depend on the type of spindle motor being used. AC Induction / permanent magnet synchronous motors are common motor choices; the latter will be modeled for this work.

If it is assumed that the motor is not near its limiting speed, the maximum torque attainable is equal to:

$$\tau_{max} = K_\tau I_{max}$$

## 2.4 Optimization

Traditional nonlinear optimization techniques can be used if the optimality of the cutting process is represented as a minimizable function (a "loss" function). The loss function will need to map potential cutting conditions to a measure of optimality. Optimality will be defined as the negative product of a "success" metric and a "success probability" metric. The success metric will be defined as MRR<sup>1</sup>.

The success probability metric will be defined in terms of the failure models established earlier. This metric should be continuously differentiable and should drop off steeply if the predicted output of any failure model comes within 90% of its allowable threshold. This is achieved by means of a reversed logistic function.

$$\begin{aligned}\lambda &= -L_{opt}L_{suc} \\ L_{opt} &= DWf_r \\ G(x) &= 1 - \frac{1}{1 + e^{-20(x-0.9)}} \\ L_{suc} &= \prod^i G\left(\frac{F_{i,pred}}{F_{i,max}}\right)\end{aligned}$$

A standard nonlinear optimizer can then be used to find the best cutting conditions. `scipy.optimize.minimize`<sup>2</sup> was used with satisfactory results. Depth-of-cut, width-of-cut, and feedrate can be optimized simultaneously; spindle speed can also be included if the machine has a provision to prevent tool overheating (i.e flood coolant).

## 2.5 Model Bootstrapping and Data Persistence

The model described above has no data when instantiated and no predictive power; it therefore cannot be relied upon by the optimizer until it collects sufficient data. To work around this, the system starts cutting with conservative user-set "bootstrap"

---

<sup>1</sup>Material removal rate; a common measure of cutting performance

<sup>2</sup>A Python minimization routine that uses the L-BFGS-B algorithm

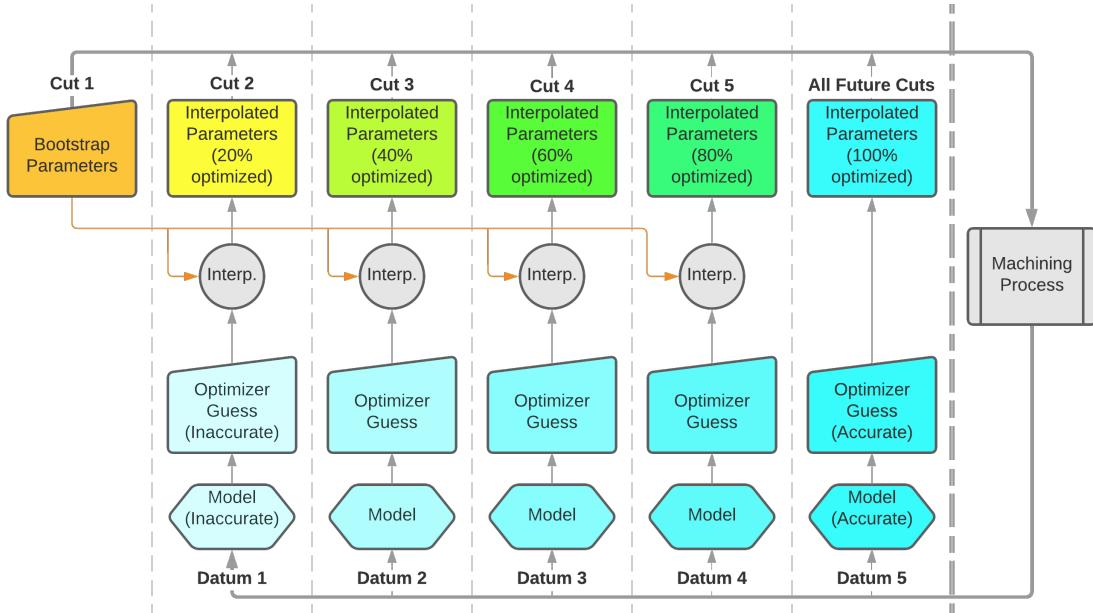


Figure 2-4: Diagram of bootstrapping process

parameters that are guaranteed to be safe. Data from this bootstrap cut is fed to the model to improve it slightly. The still-unreliable model is then used by the optimizer to find "unreliable" optimized cutting parameters. The system does not use these unreliable cutting parameters directly; it instead interpolates between the bootstrap parameters and the unreliable parameters. The interpolation initially favors the bootstrap parameters; as more data is collected, it linearly shifts towards the optimized parameters. Figure 2-4 shows the process in detail.

At least two interpolative steps must be taken to guarantee that the linear regression is not underdetermined, but taking more steps is required in practice due to sensor noise. Five interpolative steps were used in this implementation.

As mentioned before, cutting coefficients are specific to each material / tool combination. If a set of tools with a consistent rake angle and surface finish are used on the same material, however, data from all of these tools can be shared. Bootstrapping becomes unnecessary if at least one similar tool has already been used to cut the same material.

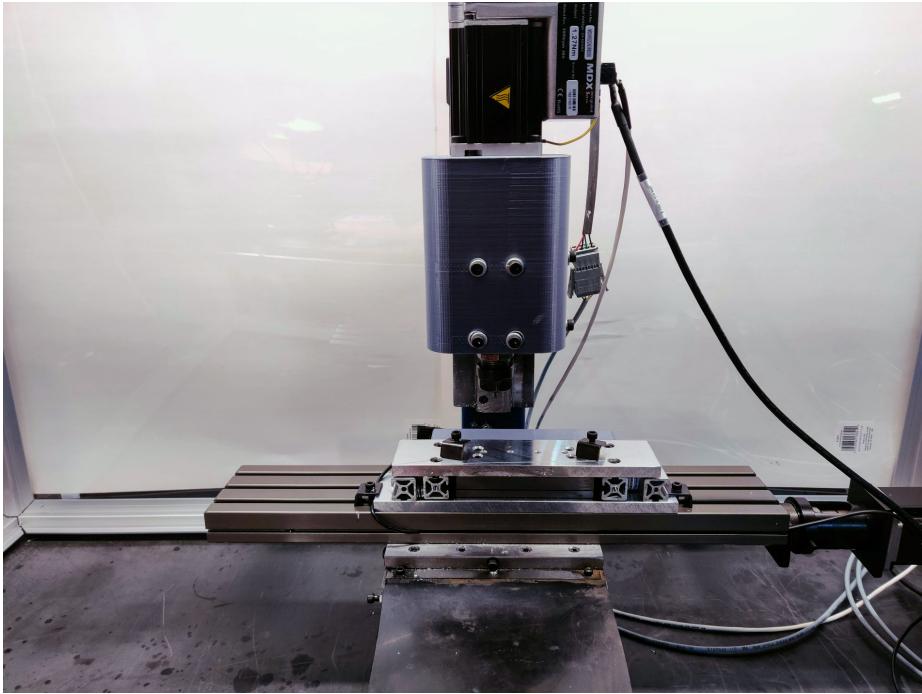


Figure 2-5: Machine used for experimentation

## 2.6 Hardware

The hardware setup for this system consists of a Taig Tools CNC micro milling machine retrofitted with a torque-sensing spindle and a uniaxial tool force dynamometer. The machine is driven by Gecko G250X stepper drivers connected to a GRBL-based controller. The structural loop between the spindle and table has a stiffness of  $1.25 \times 10^5$  N/m. An air blast is used to evacuate chips and prevent the cutter from overheating.

As mentioned previously, this thesis was completed during the COVID-19 pandemic with few available resources. As such, it was especially important that all sensors be low-cost and easy to fabricate.

### 2.6.1 Torque Sensor

Torque readings can be indirectly acquired by measuring the spindle motor's RMS phase currents. If the motor uses a well-implemented FOC<sup>3</sup> algorithm, a majority of this current will be quadrature current. This enables motor torques to be calculated using the motor's torque constant  $K_T$ .

An Applied Motion Products MDXK62GN3 servomotor was used in this work. The motor was directly coupled to the spindle to improve sensor bandwidth. Raw current readings from the motor were noisy due to the nature of the internal PID velocity loop; a mean filter w/ outlier removal was used to obtain cleaner readings.

An off-the-shelf VESC<sup>4</sup> connected to a BEI DIH23-30-013Z was also tested but failed to maintain stability during cutting; a reliable FOC algorithm proved to be essential for this application.

A significant amount of motor torque is needed in order to overcome friction and viscous damping present in the spindle. This torque was found to vary with both spindle speed and spindle bearing temperature on the Taig. To compensate for this, no-load spindle currents were briefly measured out-of-cut before each consecutive cut.

### 2.6.2 Uniaxial Tool Force Dynamometer


Since the model used for this system defines a relationship between the X and Y cutting force components, only one of these components needs to be measured. This greatly simplifies the design of the tool force dynamometer and makes it possible to construct one using off-the-shelf parts.

The tool force dynamometer used for this thesis consists of a base plate and a top plate with a Schneeberger NK 2-110B frictionless table connecting the two. The top plate holds the stock and can travel along one axis. To measure forces along this axis, the top plate is preloaded by compression springs against a 50kg disc-type strain gauge. Any forces exerted on the stock along the axis of travel pass through

---

<sup>3</sup>Field Oriented Control; an algorithm used to orient a motor's electromagnetic field at an optimal torque-producing angle


<sup>4</sup>Vedder ESC; a popular open-source brushless motor controller

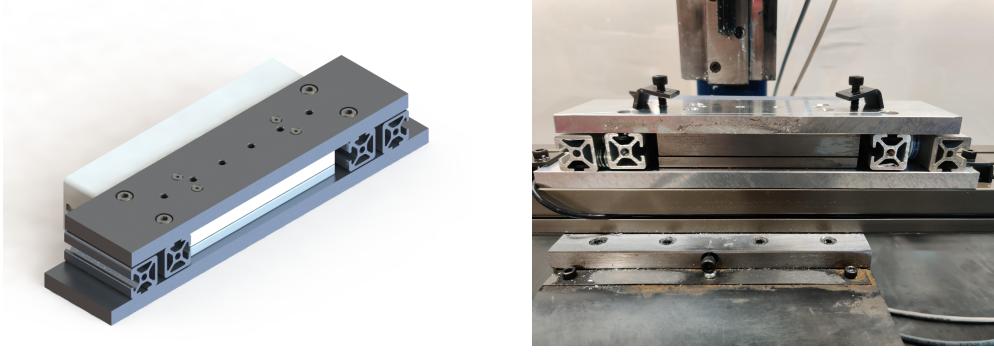

(a) CAD of tool force dynamometer

(b) Actual tool force dynamometer

Figure 2-6: Tool force dynamometer implementation

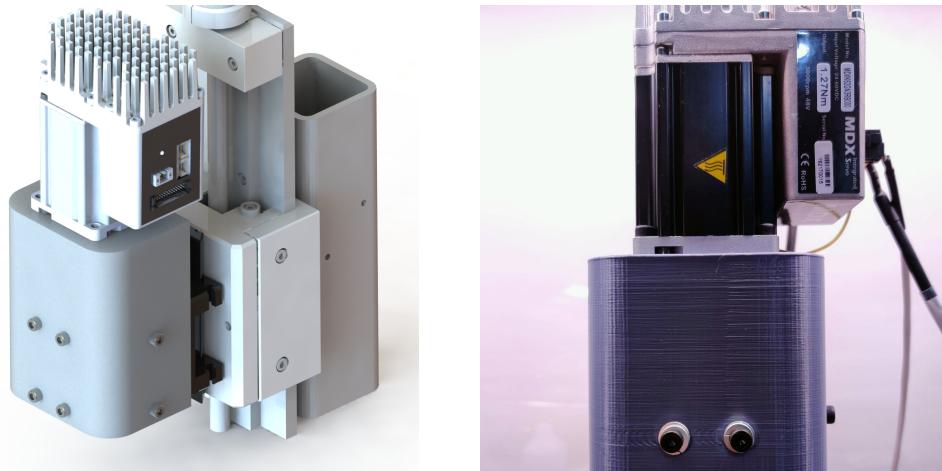

(a) CAD of servo-equipped spindle

(b) Actual servo-equipped spindle

Figure 2-7: Servo-equipped spindle implementation

this strain gauge. Readings from the strain gauge are collected using a HX711 ADC. The dynamometer is calibrated by applying a known load and measuring the output of the strain gauge.

An initial attempt at creating a tool-force dynamometer used an S-type strain gauge load cell to measure forces. While accurate, this type of load cell was too compliant for proper milling.



# Chapter 3

## Evaluation

Evaluation of this system was split into three separate tasks:

- Evaluating the predictive power of the linear modeling scheme
- Evaluating the ability of the system to converge to optimized parameters
- Evaluating the ability of the system to adapt to different materials and tooling

To simplify testing, a task was devised in which the system would face a piece of flat stock. Torque and force data would be averaged over each cut and used to train the system. Python 3.8 was used to implement the system and all of its components.

### 3.0.1 Experimental Setup

Flat bars of stock measuring 4" x 2" x 0.375" were mounted directly to the dynamometer. 3-fluted TiCN-coated carbide endmills from Niagra Cutter were used for all experiments; the TiCN coating was chosen to stop chips from adhering to the endmill during tests. All tools were run at a spindle RPM of 200 rad/s with an airblast to reduce overheating and chip recutting.

### 3.1 Model Fit Performance

To test the model's performance in isolation, the machine was directed to take a large number of facing cuts on 6061 aluminum at a variety of feedrates and width-of-cuts. A 0.25" endmill was used with a 1 mm depth-of-cut. Data from these cuts was then used to train the model.

Figures 3-1 and 3-2 show the resulting fit. An  $R^2$  value of 0.987 was achieved with an average prediction error of 3.4%. This is sufficiently accurate for our system.

An additional test was performed in which the model was only given feedrates below 0.004 m/s and then asked to extrapolate predictions for higher feedrates. Figures 3-3 and 3-4 show that the extrapolated predictions are still reasonably accurate; an  $R^2$  value of 0.979 was achieved with an average prediction error of 4.1%.

### 3.2 Optimization Performance

To test optimization performance, the system was given control of the feedrate and width-of-cut for each facing pass. Tests were performed on 6061 aluminum with a 0.25" endmill and a 1.5 mm depth-of-cut. The system was directed to keep deflection below 0.1mm and failure probabilities below 5%. The initial bootstrap cut had a feedrate of 0.001 m/s and a width-of-cut of 1 mm.

Figure 3-5 shows the system's predictions for each successive cut. Figure 3-6 shows the system's predictions *after* it has been trained with data from every cut. The former figure shows that the system was capable of rapidly converging to the ground truth; the latter shows that the final system collected enough data to accurately model all of the cuts it made.

### 3.3 System Adaptability

To assess the system's adaptability, the previous test was repeated with multiple different combinations of materials and tooling (see 3.1). The machine used had a

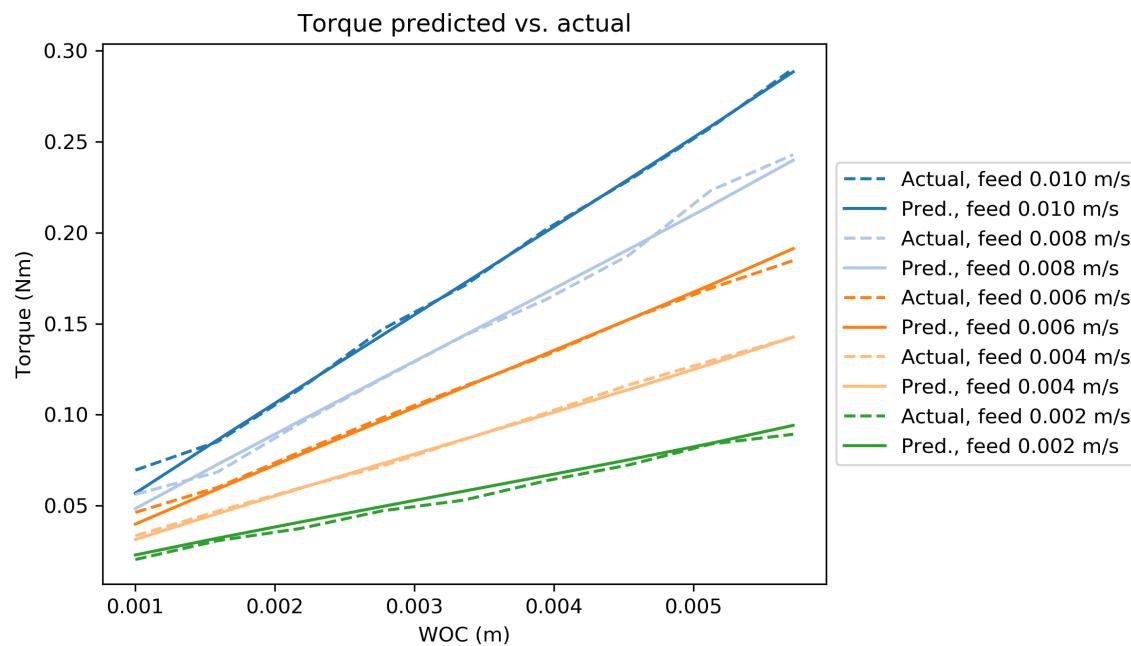


Figure 3-1: Model fit for spindle torques

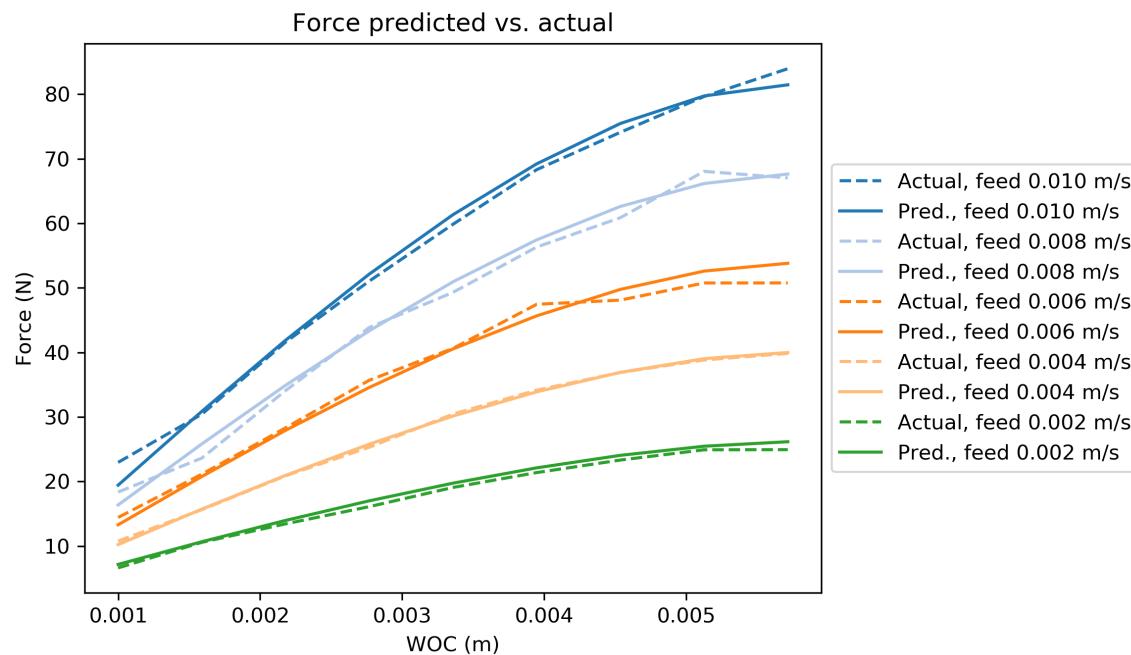


Figure 3-2: Model fit for cutting forces

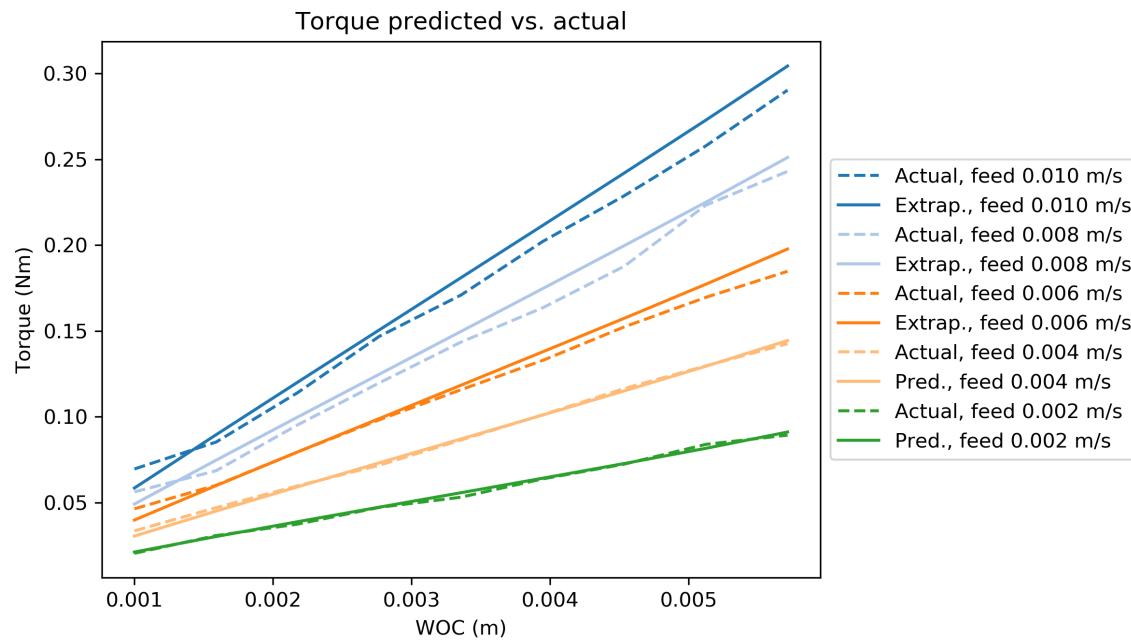


Figure 3-3: Model fit for spindle torques when asked to extrapolate feeds above 0.004

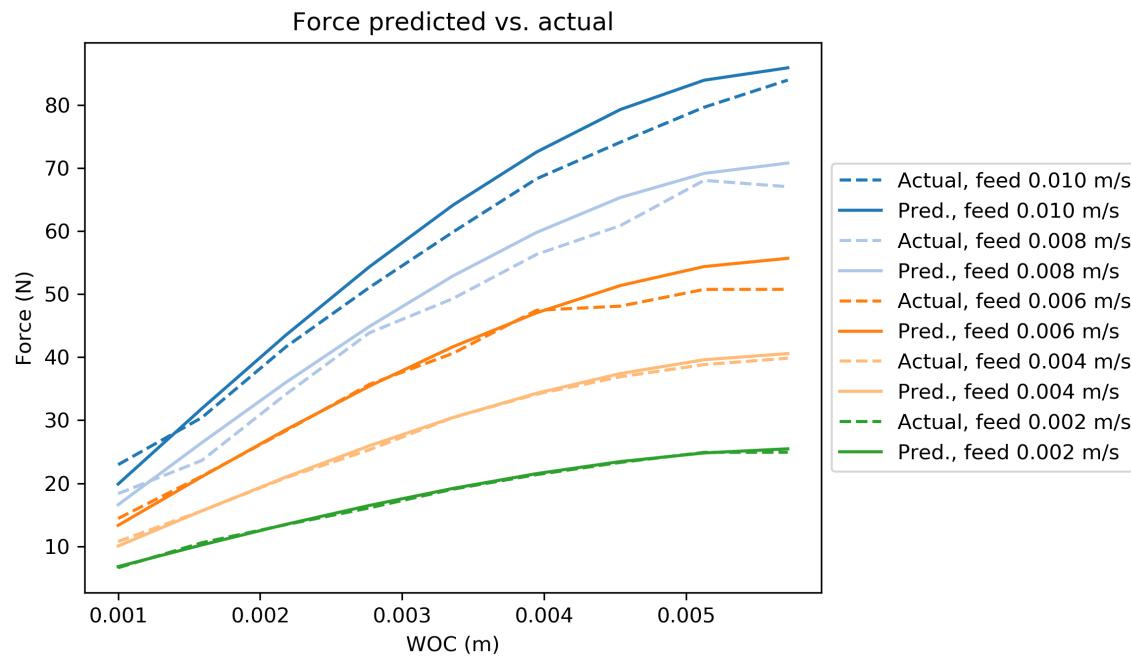


Figure 3-4: Model fit for cutting forces when asked to extrapolate feeds above 0.004

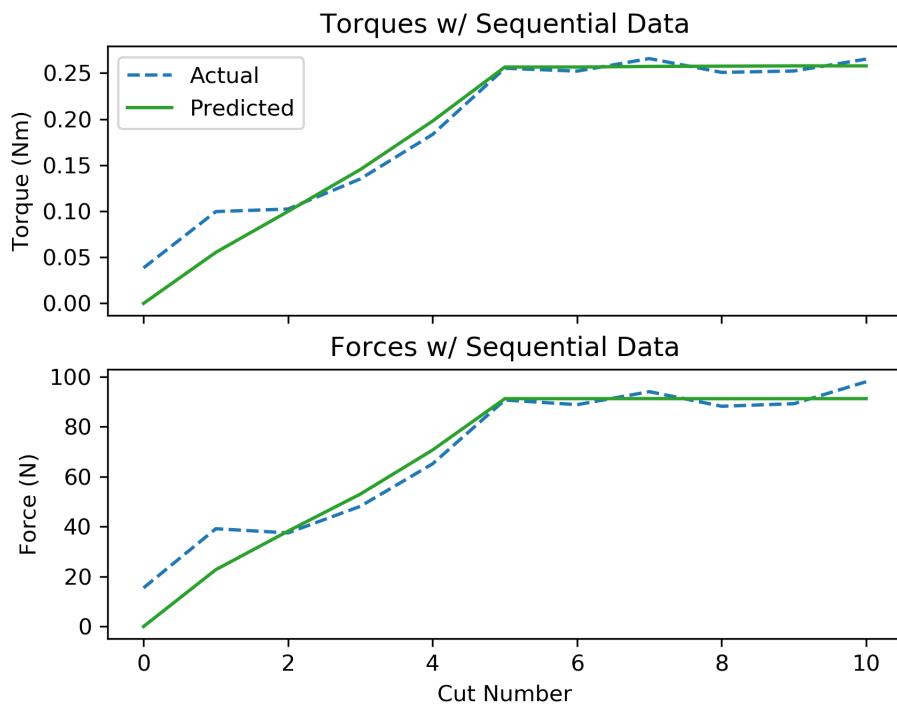


Figure 3-5: Convergence of model to ground-truth data over successive cuts

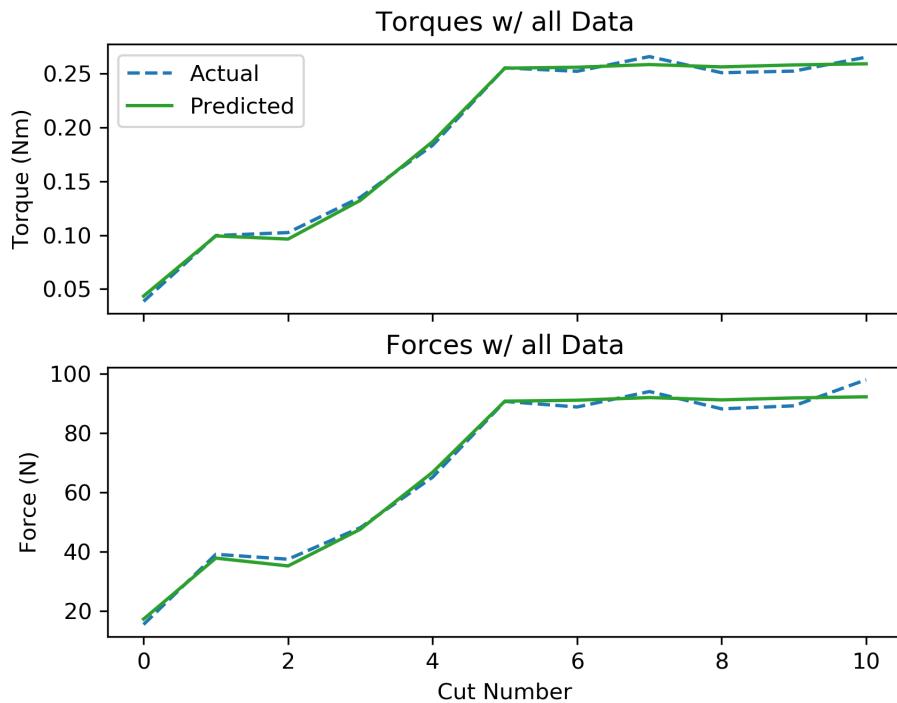


Figure 3-6: Model fit after all cuts were made (i.e "in hindsight")

maximum feedrate of 0.01 m/s; the depth-of-cut for each run was set such that the optimizer would not reach this limiting feedrate at model convergence.

| Material              | w/ 0.125" | w/ 0.25" | w/ 0.375" |
|-----------------------|-----------|----------|-----------|
| 304 Stainless Steel   | ✓         | ✓        | ✓         |
| 360 Brass             | ✓         | ✓        | ✓         |
| 4140 Alloy Steel      | *         | ✓        | ✓         |
| 6061 Aluminum         | *         | ✓        | ✓         |
| Low Carbon Steel      | *         | ✓        | ✓         |
| Polycarbonate Plastic | ✓         | ✓        | ✓         |
| UHMWPE Plastic        |           | ✓        |           |

Table 3.1: Materials tested & endmill diameters used

All of the material / tool diameter combinations with a ✓ worked as expected; the system converged on cutting parameters that resulted in a successful cut. Of notable interest are the tests performed on 304 stainless steel; despite this material's notoriously poor machinability, the system still converged on reasonable cutting parameters for all three endmills.

Tests on low-carbon and 4140 alloy steels with a 0.125" endmill were successful, but their optimization process was somewhat risky. As shown in figure 3-8a, the second cut made resulted in a large spike in torques and forces. This could be attributed to the bootstrapping process.

Tests on 6061 Aluminum with a 0.125" endmill resulted in tool failure due to chip welding on the 7th facing pass. The system had interestingly converged on the tool manufacturer's recommended chip load of 0.025 mm before failure occurred. A new test (shown in figure 3-8b) was performed in which isopropyl alcohol was used as mist coolant; no failures occurred. It can be presumed that thermal effects caused the original test to fail.

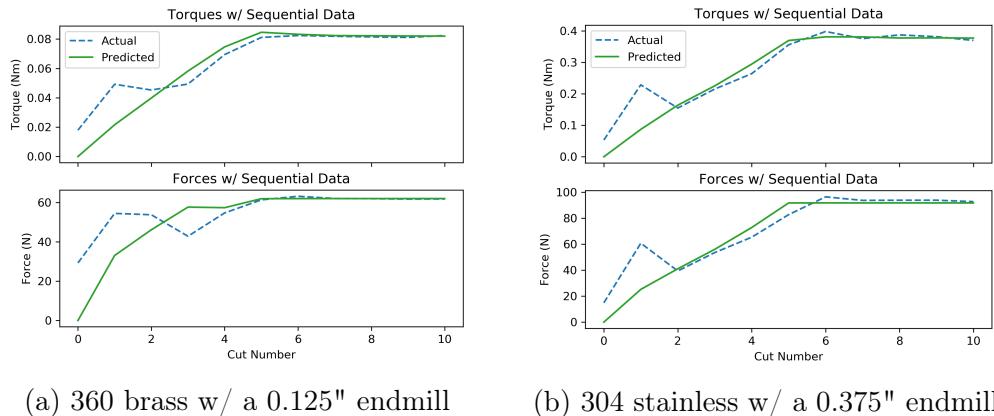


Figure 3-7: Convergence examples for successful tests

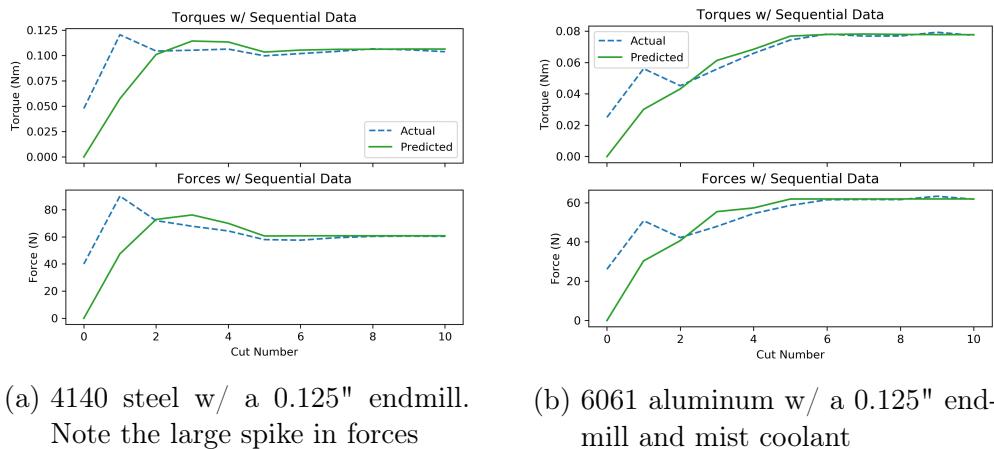


Figure 3-8: Convergence examples for tests with notable aspects



# Chapter 4

## Conclusion

Evaluation of the system proved that it was capable of modeling the milling process and optimizing cut parameters with minimal intervention for many materials. In a larger sense, this system showed that a controller capable of building an internal model of the milling process could have the potential to abstract out much of the hassle associated with milling parameter selection. Intelligent controllers made in this fashion could de-mystify CNC milling for the masses.

### 4.1 Future Work

In its current state, the system does not provide a user-ready abstraction for milling parts - but with additional work, it is not unimaginable that it could be progressed to that point.

#### 4.1.1 Modeling Improvements

Evaluation revealed that the system was still susceptible to temperature-based failure modes. Thermal failures occur when localized heating in either the material or tooling results in undesired material transformations (e.g melting, work-hardening). Localized heating, in turn, typically occurs when chips produced during cutting are not carrying away enough thermal energy. The flow of heat during milling is governed

by complex tribological rules; a simple model that describes this process would likely need to rely on empirically determined coefficients. As with our cutting force model, a sensor capable of measuring the flow of heat would be needed to find these coefficients. Low-cost LWIR thermal cameras combined with rudimentary image processing could perform this task well.

Evaluation also revealed that the bootstrapping method used was not robust enough to work with all material / endmill combinations. A bootstrapping method that employs Bayesian reasoning might yield better results.

Models to predict machine chatter generally rely on a frequency-response characterization of the machine. A modified version of this system could attempt to automatically characterize the machine using a solenoid-based impact hammer (as described in [4]. Alternatively, readings from a high-bandwidth MEMs accelerometer could be used to directly detect chatter and infer which conditions are chatter-free.

#### 4.1.2 Workflow Improvements

Traditional G-Code-based workflows are not amiable to feedback and rely on pre-computed tool trajectories. Fully employing this system would require an alternate control scheme that allows for real-time trajectory generation. An imagined implementation of this new workflow could combine toolpath generation and machine control into a single cooperative unit. As new data becomes available in real-time, internal models could be improved and used to continuously generate updated toolpaths. Distributed dataflow machine controllers as described by Jake Read [12] are ideal for this task.

## 4.2 Final Thoughts

It is an outright certainty that manufacturing technology will continue to grow more advanced - we must be careful not to let it outpace our capacity to use it. If we build good abstractions for our machines, we can move closer to a future where we spend less time being confused and more time being creative.

# Bibliography

- [1] Computer numerical control machines market size, share & trends analysis report by type (milling machines), by end use (automotive, industrial), by region, and segment forecasts, 2020 - 2027. Technical report, Grand View Research, 2020.
- [2] 3d printing market size, share & trends analysis report by material, by component (hardware, services), by printer type (desktop, industrial), by technology, by software, by application, by vertical, and segment forecasts, 2020 - 2027. Technical report, Grand View Research, 2020.
- [3] E. Budak. Analytical models for high performance milling. part i: Cutting forces, structural deformations and tolerance integrity. *International Journal of Machine Tools and Manufacture*, 46(12):1478 – 1488, 2006.
- [4] Keith Dunwoody. Automated identification of cutting force coefficients and tool dynamics on cnc machines. 01 2010.
- [5] Mustapha Elhachimi, Serge Torbaty, and Pierre Joyot. Mechanical modelling of high speed drilling. 1: predicting torque and thrust. *International Journal of Machine Tools and Manufacture*, 39(4):553 – 568, 1999.
- [6] Dohyun Kim and Doyoung Jeon. Fuzzy-logic control of cutting forces in cnc milling processes using motor currents as indirect force sensors. *Precision Engineering*, 35(1):143 – 152, 2011.
- [7] E.B. Kivanc and E. Budak. Structural modeling of end mills for form error and stability analysis. *International Journal of Machine Tools and Manufacture*, 44(11):1151 – 1161, 2004.
- [8] L. Kops and D.T. Vo. Determination of the equivalent diameter of an end mill based on its compliance. *CIRP Annals*, 39(1):93 – 96, 1990.
- [9] Lucjan Kops and D. T. Vo. Determination of the equivalent diameter of an end mill based on its compliance. 1990.
- [10] Qiaokang Liang, Dan Zhang, Wu Wanneng, and Kunlin Zou. Methods and research for multi-component cutting force sensing devices and approaches in machining. *Sensors*, 16:1926, 11 2016.

- [11] J.A. Nemes, S. Asamoah-Attiah, E. Budak, and L. Kops. Cutting load capacity of end mills with complex geometry. *CIRP Annals*, 50(1):65 – 68, 2001.
- [12] Jake R Read. *Distributed Dataflow Machine Controllers*. PhD thesis, Center for Bits and Atoms, Feb 2020.
- [13] G. Yu cesan and Y. Altintas,. Prediction of Ball End Milling Forces. *Journal of Engineering for Industry*, 118(1):95–103, 02 1996.
- [14] Won-Soo Yun and Dong-Woo Cho. Accurate 3-d cutting force prediction using cutting condition independent coefficients in end milling. *International Journal of Machine Tools and Manufacture*, 41(4):463 – 478, 2001.
- [15] U. Zuperl, F. Cus, and M. Milfelner. Fuzzy control strategy for an adaptive force control in end-milling. *Journal of Materials Processing Technology*, 164-165:1472 – 1478, 2005. AMPT/AMME05 Part 2.
- [16] U. Zuperl, F. Cus, and M. Reibenschuh. Neural control strategy of constant cutting force system in end milling. *Robotics and Computer-Integrated Manufacturing*, 27(3):485 – 493, 2011.