PCB Name	MiniESP32
Size	Xmm x Xmm (see drawing)
Attached Layerstack mandatory	no
Layers	4
Thickness	1.6mm
Material	FR4 / Epoxy
Copper-Thickness top/bottom	35µm
Copper-Thickness inner layers	17.5µm
Surface	chemical Ni/Au
Solder mask	double-sided (purple)
Peelable mask	no
Scoring	no
UL required	no
Outline/Shape	milling
Chamfer	no
Electrical Test	yes
Impedance	no
IPC/Perfag	Class 2
internal millings	yes
Silkscreen Top	yes
Silkscreen Bottom	yes
Pressfit	no

Last Modification: 18.03.2026
Document: Board Specification.PCBDwf
Project: MiniESP32.PrjPcb
Variant: V2.2 PD

@4R3Ngineering

Signal Top (Scale 1:1)

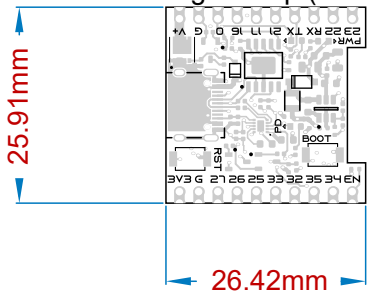

Last Modification: 18.03.2026	@4R3Ngineering
Document: Board Specification.PCBDwg	
Project: MiniESP32.PrjPcb	
Variant: V2.2 PD	

Drill Drawing View (Scale 1:1)



Drill Table

Symbol	Count	Hole Size	Plated	Via / Pad	Hole Tolerance
◎	77	0.30mm(12mil)	Plated	Via	
○	2	0.67mm(27mil)	Non-Plated	Pad	
□	4	0.70mm(28mil)	Plated	Pad	
✡	40	1.00mm(39mil)	Plated	Pad	
	123 Total				

Last Modification: 18.03.2026	@4R3Ngineering
Document: Board Specification.PCBDwf	
Project: MiniESP32.PrjPcb	
Variant: V2.2 PD	