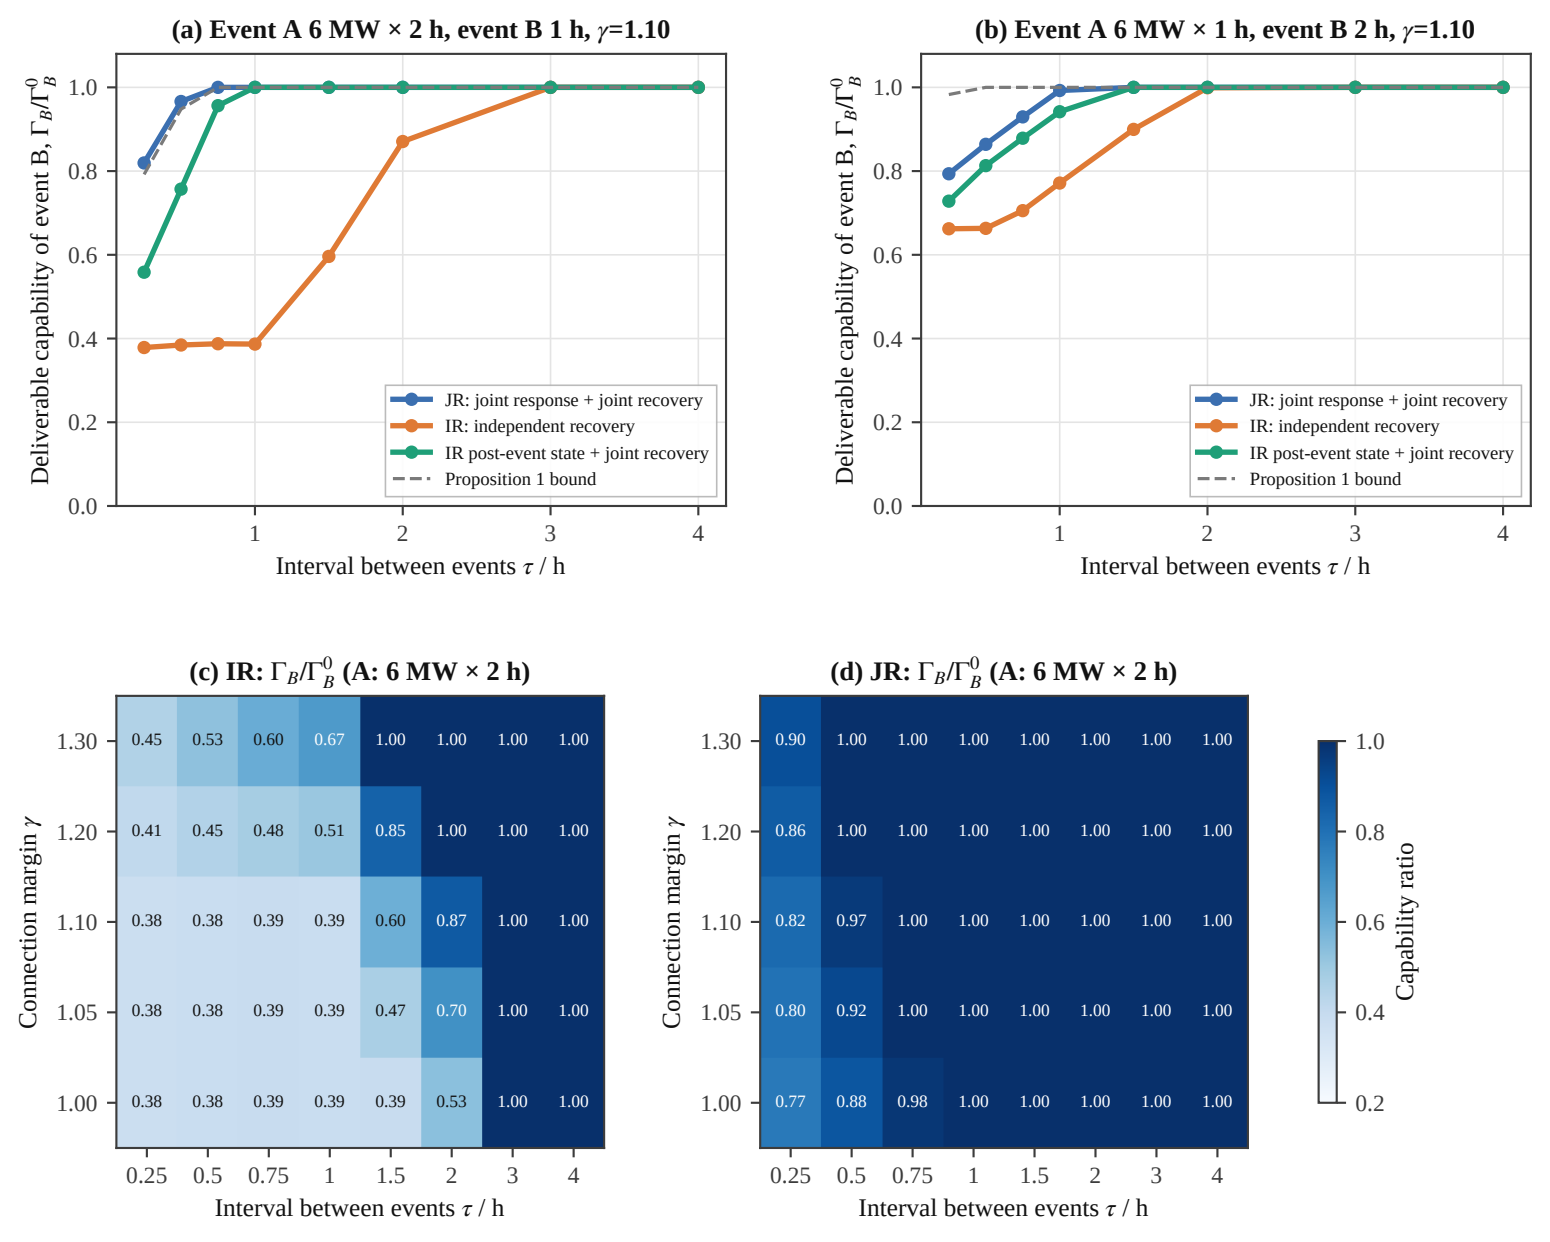
(a) Event A 6 MW × 2 h, event B 1 h, γ=1.10
Deliverable capability of event B, $\Gamma_B/\Gamma_B^0$
Interval between events τ / h
JR: joint response + joint recovery
IR: independent recovery
IR post-event state + joint recovery
Proposition 1 bound
(b) Event A 6 MW × 1 h, event B 2 h, γ=1.10
Deliverable capability of event B, $\Gamma_B/\Gamma_B^0$
Interval between events τ / h
JR: joint response + joint recovery
IR: independent recovery
IR post-event state + joint recovery
Proposition 1 bound
(c) IR: $\Gamma_B/\Gamma_B^0$ (A: 6 MW × 2 h)
Connection margin γ
1.30 0.45 0.53 0.60 0.67 1.00 1.00 1.00 1.00
1.20 0.41 0.45 0.48 0.51 0.85 1.00 1.00 1.00
1.10 0.38 0.38 0.39 0.39 0.60 0.87 1.00 1.00
1.05 0.38 0.38 0.39 0.39 0.47 0.70 1.00 1.00
1.00 0.38 0.38 0.39 0.39 0.39 0.53 1.00 1.00
0.25 0.5 0.75 1 1.5 2 3 4
Interval between events τ / h
(d) JR: $\Gamma_B/\Gamma_B^0$ (A: 6 MW × 2 h)
Connection margin γ
1.30 0.90 1.00 1.00 1.00 1.00 1.00 1.00 1.00
1.20 0.86 1.00 1.00 1.00 1.00 1.00 1.00 1.00
1.10 0.82 0.97 1.00 1.00 1.00 1.00 1.00 1.00
1.05 0.80 0.92 1.00 1.00 1.00 1.00 1.00 1.00
1.00 0.77 0.88 0.98 1.00 1.00 1.00 1.00 1.00
0.25 0.5 0.75 1 1.5 2 3 4
Interval between events τ / h
Capability ratio