

HSTS016L

YHDC®

Open loop split core type, hanging installation, cable output.
Detect DC, AC and pulse current,
High insulation between primary side and the vice side circuit.

Product picture printing is for reference only,
subject to the actual product

Product application

- Railway
- Metallurgical
- Welding machine
- Robot
- Motor
- Inverter power supply
- Variable frequency governor
- Uninterrupted power supply and communication power supply

Product features

- Light weight
- Low power consumption
- Good linearity
- No insertion loss
- Fast response time
- Good anti-interference ability



Electrical parameters: the following parameters are typical values, the
actual values shall be subject to the actual measurement of the product

Rated input	±10A ±20A ±30A ±50A ±100A ±150A ±200A
Input measurement range	±15A ±30A ±45A ±75A ±150A ±200A ±200A
Rated output	1.65V ±0.625V
Accuracy	1%
Linearity	1%
Supply voltage	+3.3V
Current consumption	≤12mA
Load impedance	≥10K Ω
Zero offset voltage	≤±15mV
Response time	≤5 μs
Weight	81g
Operation temperature	-10~+70℃
Storage temperature	-25~+70℃
Band width	DC~25KHz
Dielectric strength	2.5KV 50Hz 1min

Cable definition:

Red: +V
Black: 0V
Yellow: Vout
White: Vref (Can be suspended, not grounded)

Potentiometer definition:

K: zero
L: gain

Calculation formula: 1.65V±0.625V 0V datum

Forward direction: $1.65 + (I/IPN) * 0.625$

Reverse direction: $1.65 - (I/IPN) * 0.625$

Factory commissioning :

1. Debugging with 0V as the reference point (acquiescence)
2. Debug with Vref as the reference point (optional)


※Detection:

- ① Choose the auxiliary power supply with small ripple (≤10mV)
- ② Switch on auxiliary power
- ③ The auxiliary power is connected to the sensor
- ④ The sensor detects the primary current


Cable:

Cable specification: 0.2mm² four-core shielding wire
Four core colors: red, black, yellow, white
Cable length: 50cm (50cm~55cm)


Wiring diagram (based on 0V)

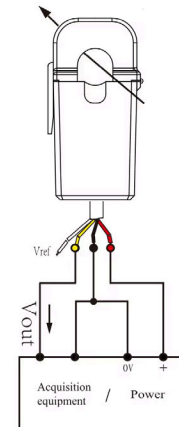

Dimensions(in mm±0.5) :




Front view



Current direction

K → L



Side view