Cagayan Kurt John B.
2 CS A

STEP 1:
Issue a dump command that will display the 64 bytes of memory locations that are located at offsets 0500H through 053FH in the current data segment. Issue a dump command that will display the 64 bytes of memory locations that are located at offsets 0500H through 053FH in the current data segment.

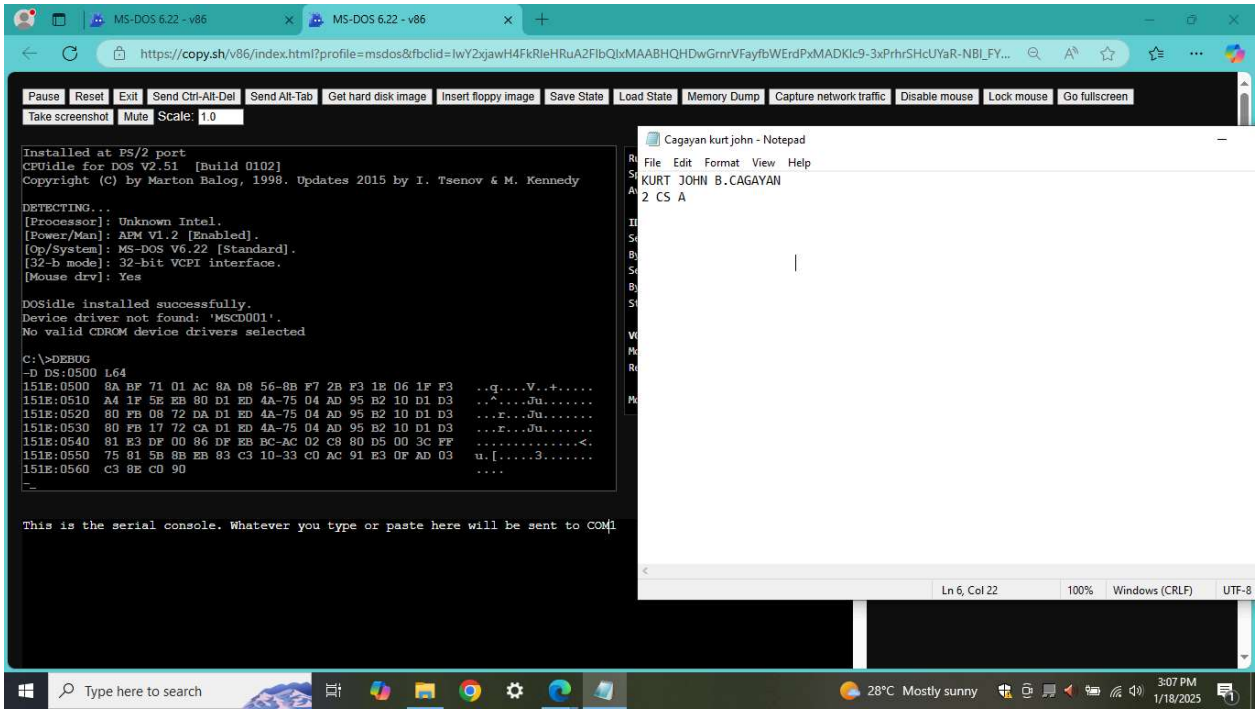

STEP 2:
Execute the command below:
-E DS:0500 'Information and Communications Technology (ICT)'

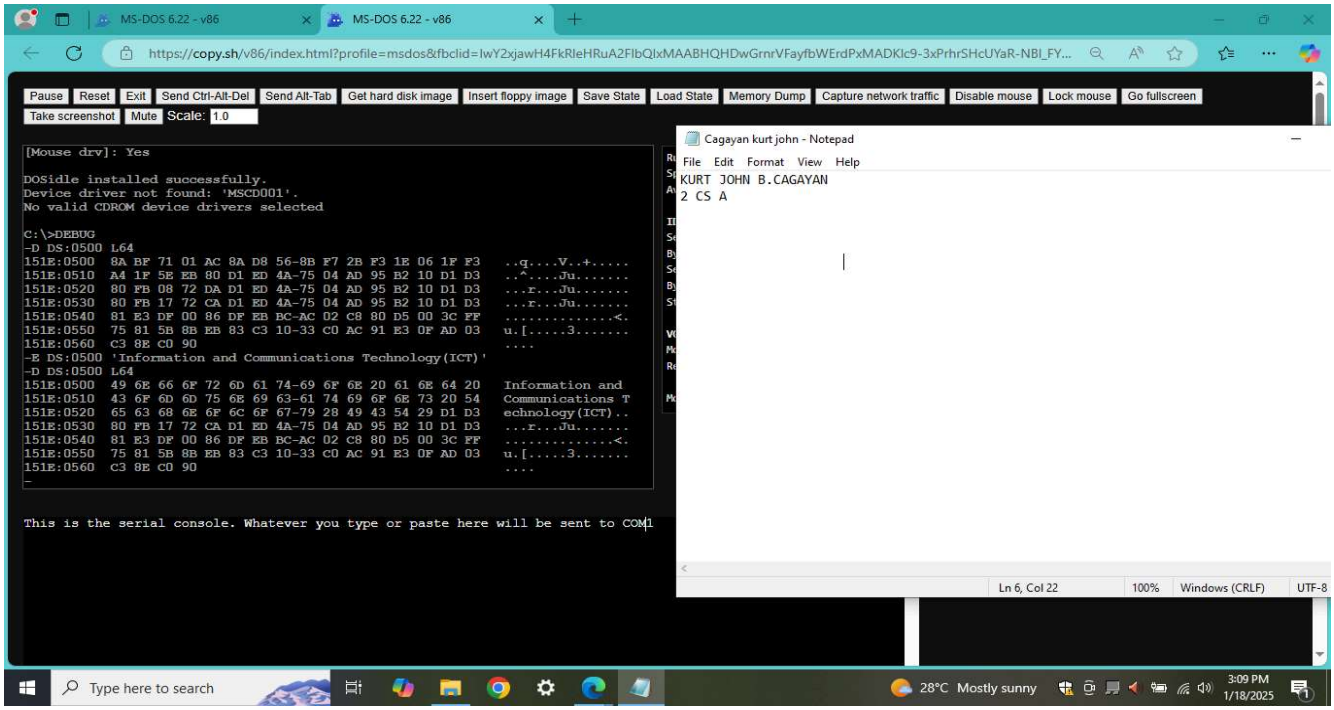

STEP 3.

Repeat Step 1 and look at the memory information on the right.

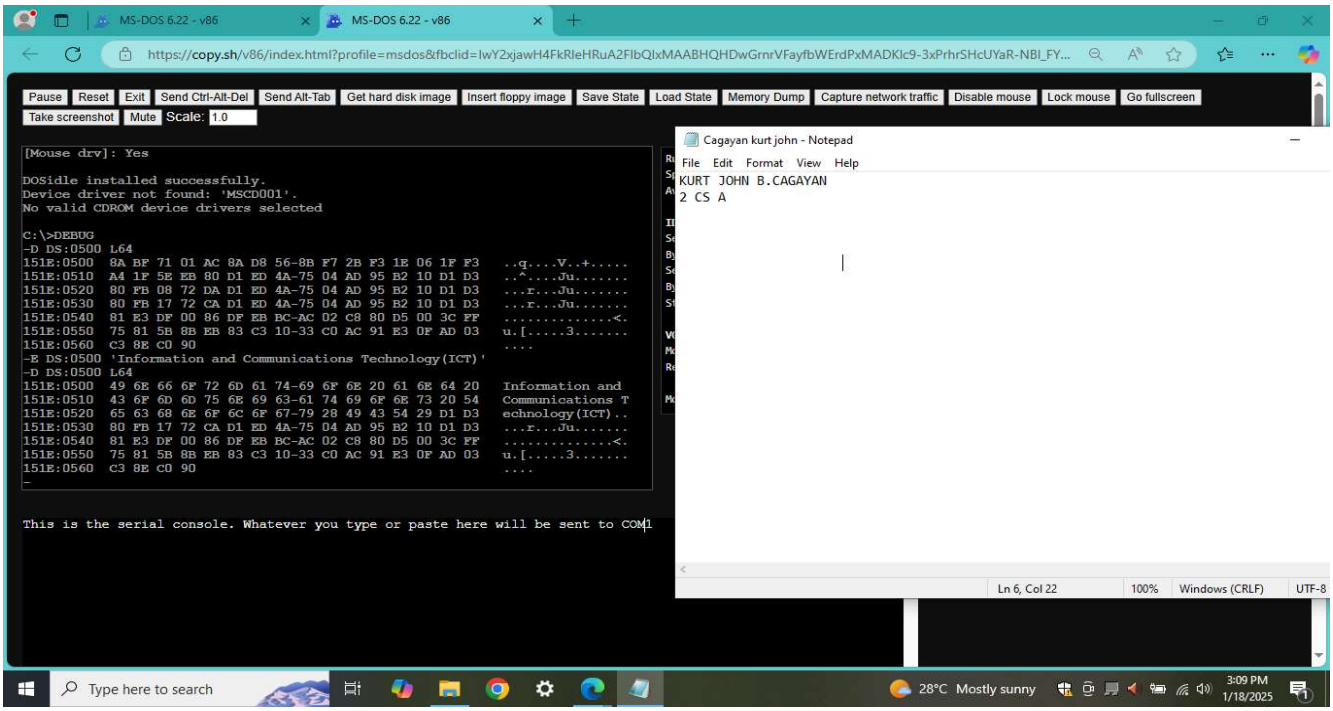

STEP 4:

Initialize the value 22H in all storage locations in the memory block starting at address DS:0500 and ending at address DS:051F, and the value 44H in all storage locations starting at address DS:0520 and ending at address DS:053F. Make that the modifications to the contents of these memory ranges are done correctly.

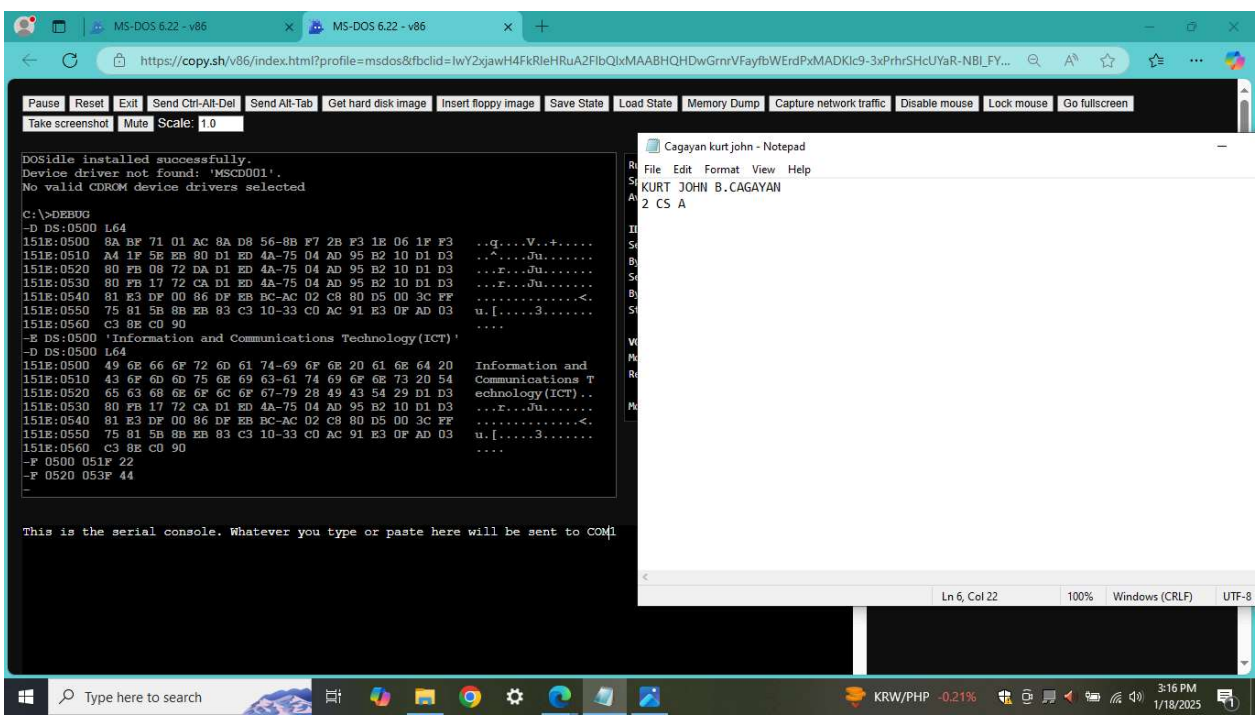

STEP 5;
Assume that the memory location starting at CS:0500 will contain the program listed below. Assemble the program below together.

MOV AX, 0500
MOV DS, AX
MOV SI, 0100
MOV DI, 0120
MOV CX, 0020
MOV AL, [SI]
MOV [DI], AL
INC SI
INC DI
DEC CX
JNZ 050E
NOP

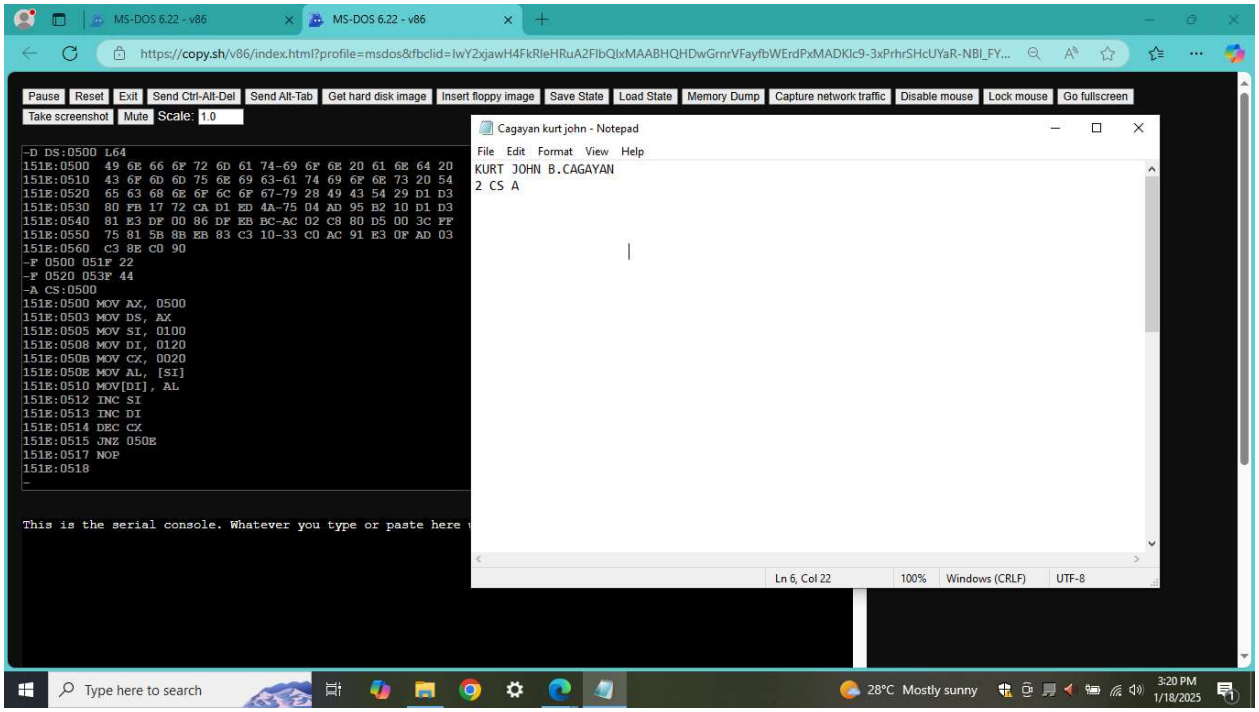

STEP 6;

Execute (Go) the program.

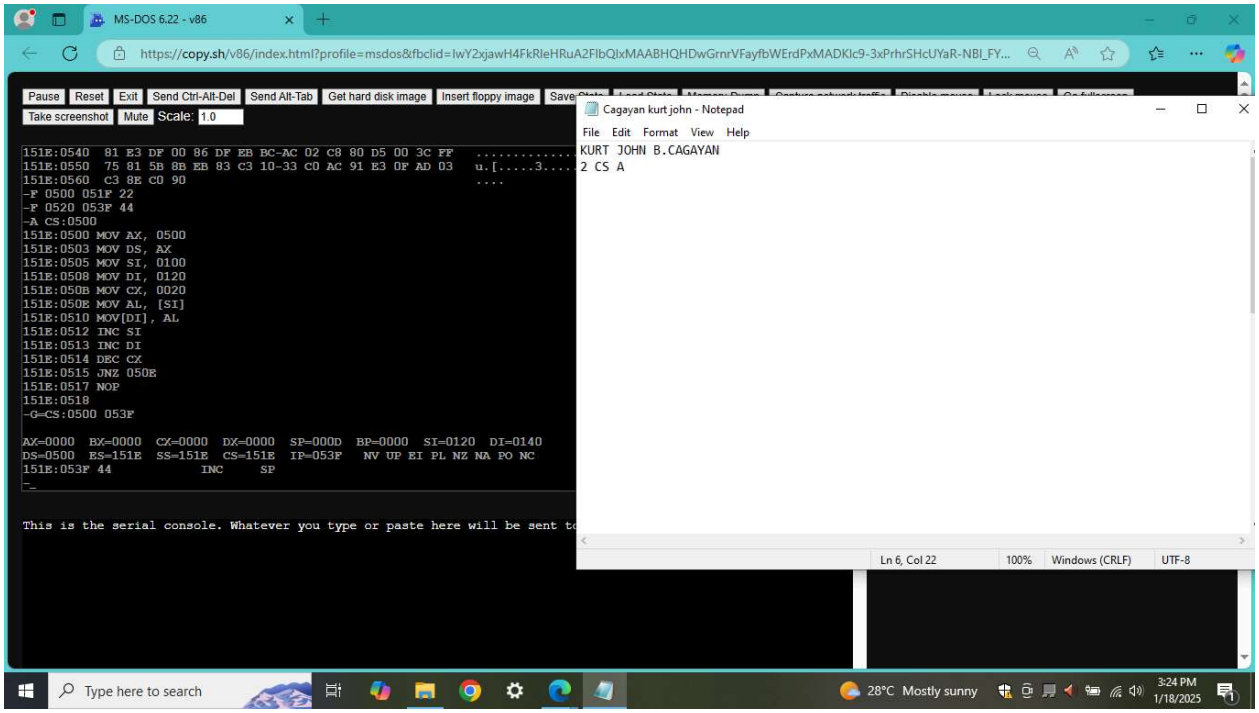

STEP 7;
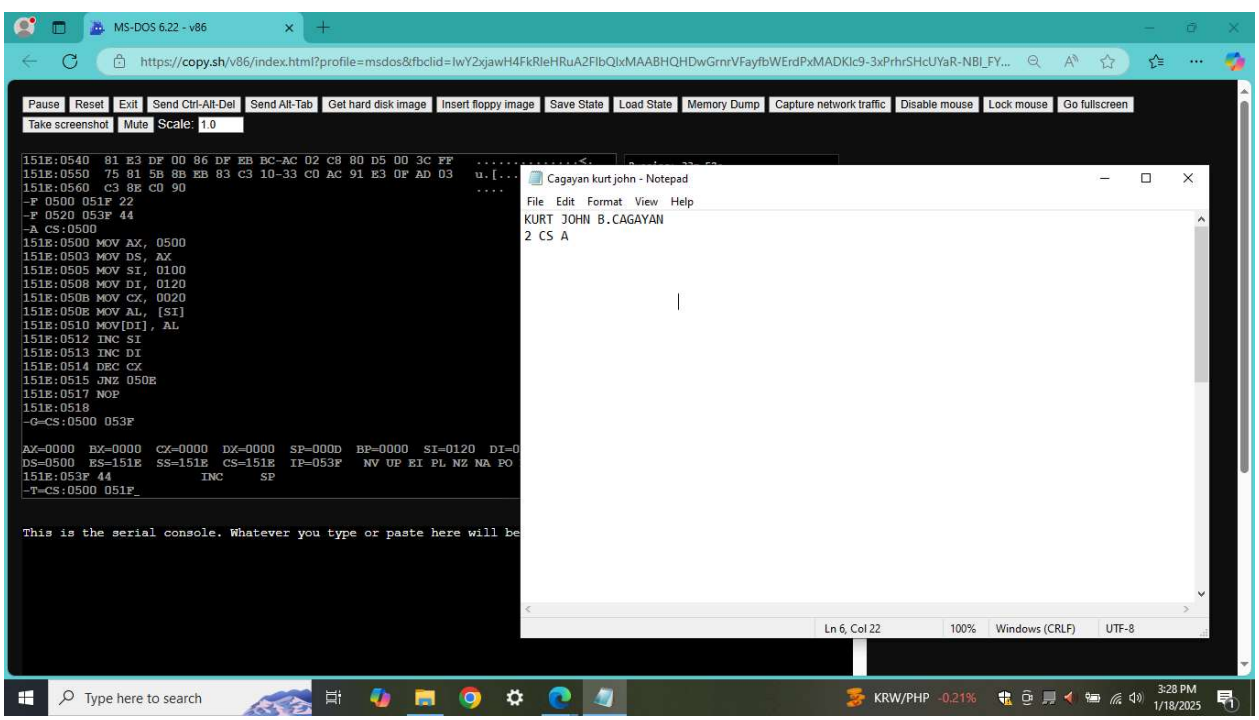
Trace the program and pay attention to the register and memory addresses utilized.