



# Global Trigger Logic - Description for emulator

Herbert Bergauer, Babak Rahbaran, Johannes Wittmann  
Institute of High Energy Physics (HEPHY)

<http://www.hephy.at>

<http://globaltrigger.hephy.at>

November 18, 2021

---

## Revision History

| Doc Rev | Description of Change   | Revision Date |
|---------|---|---------------|
| 5.1     | Updated data structure for jets with DISP bit (1.2.1).  | 2021/11/17    |
| 5.0     | Inserted "Calculation of look-up-tables (LUTs) for correlation cuts" (1.4.7).   | 2021/11/10    |
| 4.9     | Updated (and renamed) description of "Invariant mass over delta R calculation" (see 1.4.6).   | 2021/09/14    |
| 4.8     | Fixed typo in section "Invariant mass calculation for three objects" 1.4.6.   | 2020/12/03    |
| 4.7     | Inserted links to VHDL modules.   | 2020/09/18    |
| 4.6     | Updated text in section "Correlation conditions" 1.4.13. Description is for v1.10.0 of Global Trigger Logic.  | 2020/09/17    |
| 4.5     | Inserted description of "Invariant mass divided by delta R calculation" (see 1.4.6).  | 2020/09/10    |
| 4.4     | Fixed typo (unconstrained pt).  | 2020/09/09    |
| 4.3     | Inserted text for new muon structure in sections 1.2.2 and 1.4.4.   | 2020/08/04    |
| 4.2     | Additional text in section calo calo overlap remover condition module.  | 2020/05/25    |
| 4.1     | Updated glossary.   | 2020/04/21    |
| 4.0     | Removed listings (not usefull for emulator designers).  | 2020/04/17    |
| 3.9     | Inserted text in section Calorimeter Overlap Remover conditions and Calo Calo Overlap Remover Correlation conditions.   | 2020/04/16    |
| 3.8     | Updated text in sections Calorimeter conditions, Muon conditions and Correlation conditions for changes which have been done for GTL VHDL version 1.8.0 (module names without version number, "five eta cuts"). | 2019/08/13    |
| 3.7     | Inserted "Asymmetry" and "Centrality" of "Energy sums" (GTL VHDL version 1.6.0).  | 2018/08/13    |
| 3.6     | Updated text in section "Global Trigger Logic" (1) according to firmware version v1.5.0 of gtl_module.vhd   | 2018/02/21    |
| 3.5     | Inserted text for "Minimum bias trigger conditions" (1.4.10) and "Towercount condition" (1.4.11). Updated glossary.   | 2016/11/28    |
| 3.4     | Updated text in section "Muon Muon Correlation condition module".   | 2016/01/15    |
| 3.3     | Removed "Double objects requirements condition with spatial correlation", because not used anymore in the future, replaced by Correlation conditions.   | 2016/01/08    |
| 3.2     | Minor changes in text and updated Figure 3.   | 2016/01/08    |

| Doc Rev | Description of Change  | Revision Date |
|---------|--|---------------|
| 3.1     | Changed colour in Figure 4 and updated text for correlation conditions (see section 1.4.13).   | 2016/01/07    |
| 3.0     | Updated Figures 3 and text calo calo correlation condition module.   | 2015/12/21    |
| 2.9     | Inserted drawing of VHDL structure of cuts for correlation conditions (see Figure 5).  | 2015/11/18    |
| 2.8     | Updated muon $\eta$ ranges (Table 5) and inserted correlation conditions. Created scheme for conversion of calorimeter $\eta$ and $\varphi$ to muon scale for calo muon correlation conditions.  | 2015/11/17    |
| 2.7     | Added text in sections Calo comparator module and Muon comparator module.  | 2015/10/08    |
| 2.6     | Remaned section "Calorimeter conditions module - version 2" to "Calorimeter conditions module - version 3", section "Muon conditions module" to "Muon conditions module - version 2" and section "Muon comparators module" to "Muon comparators module - version 2". | 2015/10/02    |
| 2.5     | Updated text and tables of $\eta$ ranges for Calorimeter objects (see 1.4.2).  | 2015/09/22    |
| 2.4     | Corrected calculation of muon $\eta$ step width (see 1.4.4).   | 2015/09/10    |
| 2.3     | Edited text in Table 12.   | 2015/08/28    |
| 2.2     | Updated definition of $\eta$ ranges for Calorimeter objects and Muon objects (1.4.2 and 1.4.4).  | 2015/08/20    |
| 2.1     | Added section Calo Muon Correlation condition.   | 2015/08/19    |
| 2.0     | Added section "Correlation conditions" (1.4.13).   | 2015/06/19    |
| 1.9     | Added tables for calorimeter isolation-bits and for muon quality- and isolation-bits definition (4, 7 and 9). Edited section glossary (??) and acronyms.   | 2015/05/07    |
| 1.8     | Added text for "Energy sum conditions" (1.4.9) and updated chapters for "Calorimeter conditions" for version 2. Inserted isolation bits for electron/ $\gamma$ and tau objects (1.4.2).  | 2015/05/06    |
| 1.7     | Minor changes in sections "Muon data" (1.4.4).   | 2014/11/06    |
| 1.6     | Minor changes in sections "Calorimeter conditions definition" and "Muon conditions definition".  | 2014/07/01    |
| 1.5     | Minor changes  | 2014/06/12    |
| 1.4     | Fixed bug in Figure 4  | 2014/04/30    |
| 1.3     | Added section "Muon conditions".   | 2014/04/22    |
| 1.2     | Changed Figure 4 and minor changes in text for anti-clockwise behaviour in $\varphi$   | 2014/04/04    |
| 1.1     | Changed text in section Calo conditions definition.  | 2014/02/11    |
| 1.0     | Document created. Description of Calorimeter conditions.   | 2013/10/15    |

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Global Trigger Logic</b>  | <b>4</b>  |
| 1.1      | $\mu$ GTL Interface . . . . .  | 4         |
| 1.2      | Definition of optical interfaces . . . . .   | 5         |
| 1.2.1    | Calo-Layer2 optical interfaces . . . . .   | 5         |
| 1.2.2    | Global Muon Trigger optical interfaces . . . . .                                   | 6         |
| 1.3      | Implementation in firmware . . . . .   | 7         |
| 1.3.1    | Top-of-hierarchy module . . . . .  | 7         |
| 1.4      | $\mu$ GTL structure . . . . .  | 10        |
| 1.4.1    | Data $\pm 2bx$ . . . . .   | 10        |
| 1.4.2    | Definitions of Calorimeter data . . . . .  | 10        |
| 1.4.3    | Definitions of Energy sum quantities data . . . . .                                | 14        |
| 1.4.4    | Definitions of Muon data . . . . .   | 16        |
| 1.4.5    | Calculation of object cuts . . . . .   | 19        |
| 1.4.5.1  | Object cuts . . . . .  | 19        |
| 1.4.6    | Calculation of correlation cuts . . . . .  | 24        |
| 1.4.7    | Calculation of look-up-tables (LUTs) for correlation cuts . . . . .                | 28        |
| 1.4.8    | Combination conditions . . . . .   | 33        |
| 1.4.8.1  | Combination conditions definition . . . . .  | 33        |
| 1.4.9    | Energy sum quantities conditions . . . . .   | 35        |
| 1.4.9.1  | Energy sum quantities conditions module (including Asymmetry conditions) . . . . . | 35        |
| 1.4.10   | Minimum bias trigger conditions . . . . .  | 37        |
| 1.4.11   | Towercount condition . . . . .   | 37        |
| 1.4.12   | Centrality condition . . . . .   | 37        |
| 1.4.13   | Correlation conditions . . . . .   | 38        |
| 1.4.13.1 | Correlation condition module . . . . .   | 40        |
| 1.4.14   | External Conditions . . . . .  | 41        |
| 1.4.15   | Algorithms logic . . . . .   | 41        |
|          | <b>List of Tables</b>  | <b>42</b> |
|          | <b>List of Figures</b>   | <b>43</b> |

# 1 Global Trigger Logic

## SECTION STILL UNDER CONSTRUCTION

### Remark:

This description is for version 1.17.0 of Global Trigger Logic.

The Global Trigger Logic ( $\mu$ GTL) firmware contains conditions and algorithms for trigger decision.

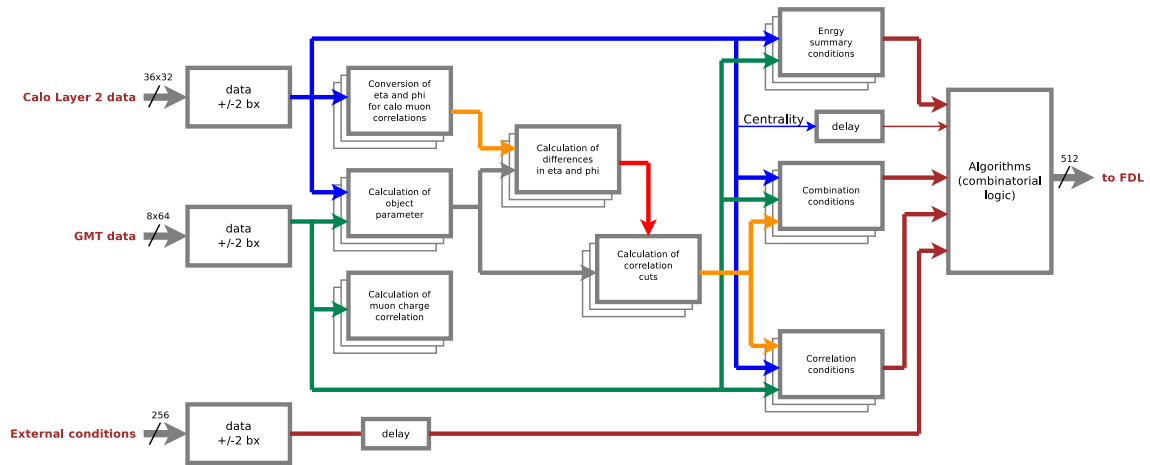


Figure 1:  $\mu$ GTL firmware

## 1.1 $\mu$ GTL Interface

### Inputs:

- Calo-Layer2 data
  - Electron/ $\gamma$  objects
  - Jet objects
  - Tau objects
  - Energy summary information:
    - \* Total Et (ET)
    - \* total Et from ECAL only (ETTEM)
    - \* total calibrated Et in jets (HT)
    - \* missing Et ( $ET_{\text{miss}}$ )
    - \* missing Et including HF ( $ET_{\text{miss}}^{\text{HF}}$ )
    - \* missing Ht objects ( $HT_{\text{miss}}$ )
    - \* missing Ht including HF ( $HT_{\text{miss}}^{\text{HF}}$ )

- \* "Asymmetry" information (ASYMET, ASYMHT, ASYMETHF, ASYMHTHF)
- Minimum bias HF bits (included in energy summary information data structure)
- Towercount bits (number of firing HCAL towers, included in energy summary information data structure)
- "Centrality" bits
- Global Muon Trigger data
- External conditions

**Outputs:**

- Algorithms


## 1.2 Definition of optical interfaces

**Remark:**


All definitions for scales in the following chapters are from a CMS Detector Note: "Scales for inputs to  $\mu$ GT" (see current version in [https://raw.githubusercontent.com/cms-l1-globaltrigger/mp7\\_ugt\\_legacy/master/doc/scales\\_inputs\\_2\\_ugt/pdf/scales\\_inputs\\_2\\_ugt.pdf](https://raw.githubusercontent.com/cms-l1-globaltrigger/mp7_ugt_legacy/master/doc/scales_inputs_2_ugt/pdf/scales_inputs_2_ugt.pdf)).

### 1.2.1 Calo-Layer2 optical interfaces

The data structure of an electron/ $\gamma$  object (bits 27..31 are not defined yet, reserved for quality, ...):




The data structure of a jet object (bits 30..31 are spare bits):



D = DISP bit, qu = quality flags, sp = spare bits.

The data structure of a tau object (bits 27..31 are not defined yet, reserved for quality, ...):



The data structure of "total Et" (ET) quantity [including "total Et from ECAL only" (ET-TEM) and "minimum bias HF+ threshold 0" bits]:

|                |              |    |                        |    |                     |    |   |
|----------------|--------------|----|------------------------|----|---------------------|----|---|
| 31             | 28           | 27 | 24                     | 23 | 12                  | 11 | 0 |
| <i>MBT0HFP</i> | <i>spare</i> |    | $E_T$ [ <i>ETTEM</i> ] |    | $E_T$ [ <i>ET</i> ] |    |   |

The data structure of "total calibrated Et in jets" (HT) quantity [including "towercount" and "minimum bias HF- threshold 0" bits]:

|                |              |    |                   |    |       |    |   |
|----------------|--------------|----|-------------------|----|-------|----|---|
| 31             | 28           | 27 | 25                | 24 | 12    | 11 | 0 |
| <i>MBT0HFM</i> | <i>spare</i> |    | <i>TOWERCOUNT</i> |    | $E_T$ |    |   |

The data structure of "missing Et" ( $ET_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits]:

|                |               |    |           |    |       |    |   |
|----------------|---------------|----|-----------|----|-------|----|---|
| 31             | 28            | 27 | 20        | 19 | 12    | 11 | 0 |
| <i>MBT1HFP</i> | <i>ASYMET</i> |    | $\varphi$ |    | $E_T$ |    |   |

The data structure of "missing Ht" ( $HT_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits]:

|                |               |    |           |    |       |    |   |
|----------------|---------------|----|-----------|----|-------|----|---|
| 31             | 28            | 27 | 20        | 19 | 12    | 11 | 0 |
| <i>MBT1HFM</i> | <i>ASYMHT</i> |    | $\varphi$ |    | $E_T$ |    |   |

The data structure of "missing Et including HF" ( $ET_{\text{miss}}^{HF}$ ) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)]:

|                  |                 |    |           |    |       |    |   |
|------------------|-----------------|----|-----------|----|-------|----|---|
| 31               | 28              | 27 | 20        | 19 | 12    | 11 | 0 |
| <i>[CENT3:0]</i> | <i>ASYMETHF</i> |    | $\varphi$ |    | $E_T$ |    |   |

The data structure of "missing Ht including HF" ( $HT_{\text{miss}}^{HF}$ ) quantity [including "Asymmetry" ASYMHTHF and "Centrality" bits (7:4)]:

|                  |                 |    |           |    |       |    |   |
|------------------|-----------------|----|-----------|----|-------|----|---|
| 31               | 28              | 27 | 20        | 19 | 12    | 11 | 0 |
| <i>CENT[7:4]</i> | <i>ASYMHTHF</i> |    | $\varphi$ |    | $E_T$ |    |   |

## 1.2.2 Global Muon Trigger optical interfaces

The data structure of a muon object (64 bits - bit 34 = charge sign, bit 35 = charge valid, bit 61 is a spare bit, bit 63..62 = impact parameter):

|                      |          |                              |    |             |                |                      |    |                   |                      |    |           |            |
|----------------------|----------|------------------------------|----|-------------|----------------|----------------------|----|-------------------|----------------------|----|-----------|------------|
| 63                   | 62       | 61                           | 60 | 53          | 52             | 43                   | 42 | 36                | 35                   | 34 | 33        | 32         |
| <i>imp</i>           | <i>s</i> | <i>unconst.p<sub>T</sub></i> |    |             | <i>φ (out)</i> |                      |    | <i>index bits</i> |                      |    | <i>ch</i> | <i>iso</i> |
|                      |          |                              |    |             |                |                      |    |                   |                      |    |           |            |
| 31                   | 23       |                              |    | 22          | 19             |                      | 18 | 10                |                      | 9  | 0         |            |
| <i>η (extrapol.)</i> |          |                              |    | <i>qual</i> |                | <i>p<sub>T</sub></i> |    |                   | <i>φ (extrapol.)</i> |    |           |            |

ch = charge bits, s = spare bit, imp = impact parameter.

## 1.3 Implementation in firmware

The firmware of  $\mu$ GTL consists of two main parts:

- A top-of-hierarchy file (`gtl_module.vhd`), which contains the pipeline for  $\pm 2bx$  data, the instantiations of calculators for differences in  $\eta$  and  $\varphi$ , the instantiations of conditions, the instantiations of charge correlation logic of muons and the Algorithms logic for 512 Algorithms, as well as a package file (`gtl_pkg.vhd`) for declarations. Actually 6 AMC board are used to contain 512 Algorithms. Therefore the 512 Algorithms are **partitioned by VHDL Producer**. The VHDL Producer for every Trigger Menu creates VHDL snippets files (`algo_index.vhd`, `gtl_module_instances.vhd`, `gtl_module_signals.vhd`, `ugt_constants.vhd`), these snippets are inserted into templates for `gtl_module.vhd` (`gtl_module_tpl.vhd`) and `gtl_pkg.vhd` (`gtl_pkg_tpl.vhd`) during simulation and synthesis.
- A set of VHDL-files exists for all the modules instantiated in top-of-hierarchy and the modules in the hierarchy. These files, called the "fixed part", are not influenced by VHDL Producer.

The latency of  $\mu$ GTL is fixed to 5 bunch-crossings, 2 bunch-crossings for the pipeline of  $\pm 2bx$  data (for data with  $+2bx$  and  $+1bx$ ), 2 bunch-crossings for conditions (fixed), also for the conditions requested in the future, 1 bunch-crossing for the logic of Algorithms (See Figure 3).

### 1.3.1 Top-of-hierarchy module

The top-of-hierarchy module (`gtl_module.vhd`) contains

- the pipeline for  $\pm 2bx$  data
- the instantiations of charge correlation logic of muons (generated by VHDL Producer)
- the instantiations of calculators for differences in  $\eta$  and  $\varphi$  (generated by VHDL Producer)
- the instantiations of conditions (generated by VHDL Producer)
- a boolean logic for Algorithms (generated by VHDL Producer)

Listing 1 contains the entity-declaration of the top-of-hierarchy file (`gtl_module.vhd`).

Listing 1: Entity declaration of `gtl_module.vhd`

```
entity gtl_module is
  port (
    lhc_clk : in std_logic;
    eg_data : in calo_objects_array(0 to NR_EG_OBJECTS-1);
    jet_data : in calo_objects_array(0 to NR_JET_OBJECTS-1);
    tau_data : in calo_objects_array(0 to NR_TAU_OBJECTS-1);
    ett_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
```



```

    ht_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    etm_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    htm_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
--
    *****

-- HB 2016-04-18: updates for "min bias trigger" objects (quantities) for Low-
  pileup-run May 2016
    mbtlhfp_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    mbtlhfm_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    mbt0hfp_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    mbt0hfm_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
-- HB 2016-06-07: inserted new esums quantities (ETTEM and ETMHF).
    ettem_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    etmhf_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
-- HB 2016-09-16: inserted HTMHF and TOWERCNT
    htmhf_data : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    towercount_data : in std_logic_vector(MAX_TOWERCOUNT_BITS-1 downto 0);
--
    *****

    muon_data : in muon_objects_array(0 to NR_MUON_OBJECTS-1);
    external_conditions : in std_logic_vector(NR_EXTERNAL_CONDITIONS-1 downto
        0);
    algo_o : out std_logic_vector(NR_ALGOS-1 downto 0));
end gtl_module;

```

All the declarations for arrays ('type'), parameters ('constant') and look-up-tables ('constant') used in modules are available in gtl\_pkg.vhd package-file.

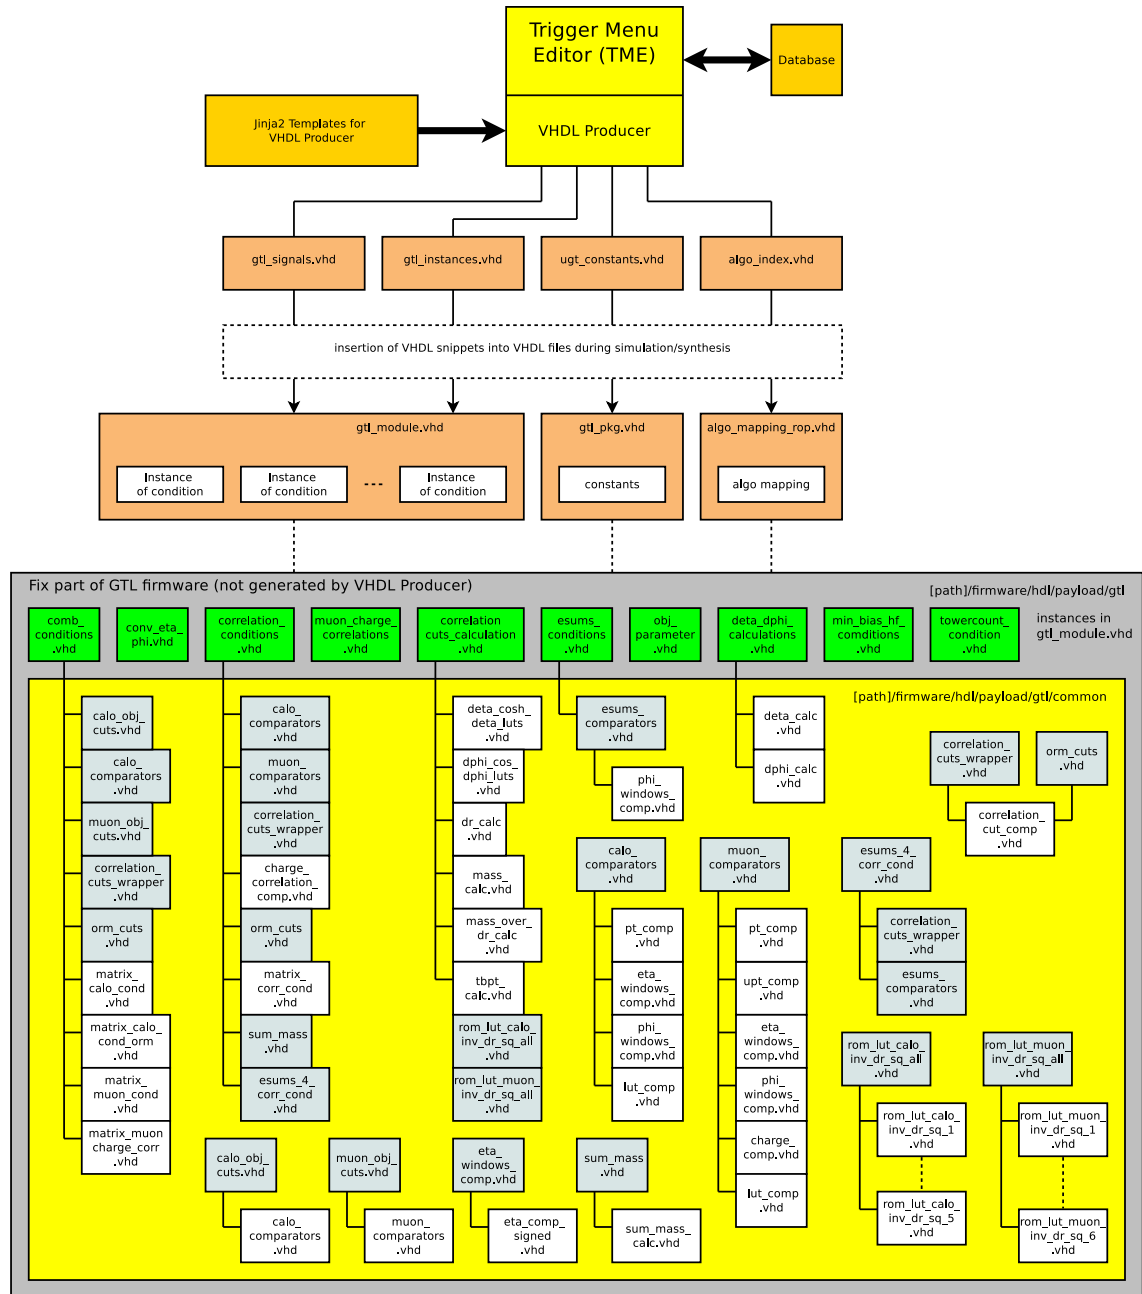


Figure 2: VHDL file generation by VHDL Producer

## 1.4 $\mu$ GTL structure

### 1.4.1 Data $\pm 2bx$

The  $\mu$ GTL input data flow through a register pipeline of four stages. With those data it is possible to have conditions with objects from different bunch-crossings (within  $\pm 2$  bunch-crossings), electron/ $\gamma$  for Correlation conditions.

See Figure 3 for a scheme of  $\mu$ GTL pipeline structure. The data "data\_p\_1bx" and "data\_p\_-2bx" occur 1 respectively 2 bunch-crossings after data for a certain bunch-crossing, therefore we got 2 bunch-crossings of latency from those data. The data "data\_m\_1bx" and "data\_m\_-2bx" have no influence on latency, because coming before data for a certain bunch-crossing.

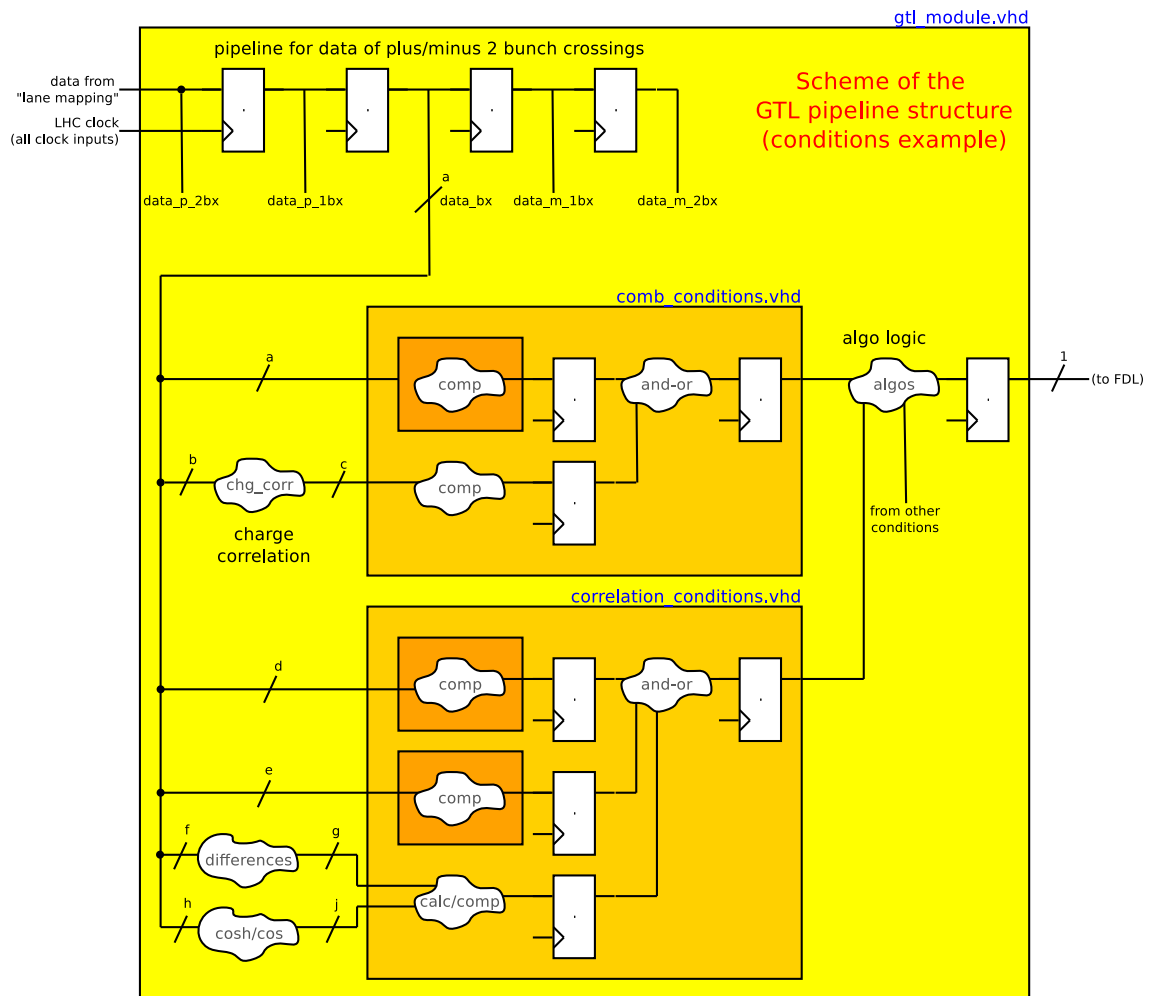


Figure 3: Scheme of  $\mu$ GTL pipeline structure

### 1.4.2 Definitions of Calorimeter data

The calorimeter trigger processing identifies **electron/ $\gamma$ , jet and tau** objects and **energy sum quantities**.

See also [1.2](#).

**electron/ $\gamma$ :**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for  $p_T$  and for position and isolation - encoded in 32 bits:

- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 138 bins (HW index = 0xBC..0x44)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\simeq 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 2 bits isolation
- 5 bits spare

**jet:**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters:  $p_T$ , for position information, a DISP bit and quality information - encoded in 32 bits:

- 11 bits  $p_T$ , range = 0..1023 GeV (HW index = 0..0x7FF), step = 0.5, the highest bin will mark an overflow (HW index 0x7FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\simeq 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 1 DISP bit (will be used to flag a jet as delayed / displaced based on HCAL timing and depth profiles that are indicative of a LLP decay. If this bit is set to 1, then the jet has been tagged as an LLP jet.)
- 2 bits for "quality flags" - currently not used.
- 2 bits spare

**tau:**

Twelve objects are passed to the  $\mu$ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for  $p_T$  and for position information and isolation - encoded in 32 bits:

- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined

- 8 (7+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 138 bins (HW index = 0xBC..0x44)
- 8 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\cong 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- 2 bits isolation
- 5 bits spare

The representation of the 8 bits (called "hardware index [HW index]") in  $\eta$  is expected as Two's Complement notation as shown below.

Table 2:  $\eta$  scale of calorimeter objects

| HW index | $\eta$ range                                 | $\eta$ bin |
|----------|--|------------|
| 0x72     | $114 \cdot 0.087/2$ to $115 \cdot 0.087/2$   | 114        |
| ...      | ...  | ...        |
| 0x01     | $0.087/2$ to $2 \cdot 0.087/2$               | 1          |
| 0x00     | 0 to $0.087/2$                               | 0          |
| 0xFF     | 0 to $-0.087/2$                              | -1         |
| 0xFE     | $-0.087/2$ to $-2 \cdot 0.087/2$             | -2         |
| ...      | ...  | ...        |
| 0x8E     | $-114 \cdot 0.087/2$ to $-115 \cdot 0.087/2$ | -115       |

The representation of the 8 bits in  $\varphi$  is expected as shown in Table 3.

Table 3:  $\varphi$  scale of calorimeter objects

| HW index | $\varphi$ range                  | $\varphi$ range [degrees] | $\varphi$ bin |
|----------|----------------------------------|---------------------------|---------------|
| 0x00     | 0 to $2\pi/144$                  | 0 to 2.5                  | 0             |
| 0x01     | $2\pi/144$ to $2 \cdot 2\pi/144$ | 2.5 to 5.0                | 1             |
| ...      | ...                              | ...                       | ...           |
| 0x8F     | $143 \cdot 2\pi/144$ to $2\pi$   | 357.5 to 360              | 143           |

The representation of the 2 bits for isolation ( $e/\gamma$  and tau) is expected as shown in Table 4.

Table 4: Definition of  $e/\gamma$  and tau isolation bits

| bits [26..25] | definition   |
|---------------|--------------|
| 00            | not isolated |
| 01            | isolated     |
| 10            | TBD          |
| 11            | TBD          |

### 1.4.3 Definitions of Energy sum quantities data

See also [1.2](#).

#### **energy sum quantities:**

Consists of following quantities (naming convention see in "Glossary"):

- **ET**
- **HT**
- $ET_{\text{miss}}$
- $HT_{\text{miss}}$
- **ETTEM**
- $\mathbf{ET}_{\text{miss}}^{HF}$
- $\mathbf{HT}_{\text{miss}}^{HF}$
- **ASYMET**
- **ASYMHT**
- **ASYMETHF**
- **ASYMHTHF**
- **CENT0**
- ..
- **CENT7**

Calo-Layer2 sends 6 frames (each 32 bits) with Energy sum quantities containing the following information:

- $E_T$ , 12 bits, range = 0..2047 GeV (HW index = 0..0xFFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFFF): meaning has to be defined
- azimuth angle ( $\varphi$ ) position, 8 bits, range =  $2\pi$ , step  $\approx 2\pi/144$  ( $\cong 2.5^\circ$ ), 144 bins (HW index = 0..0x8F), HW index starting at  $0^\circ$  (anti-clockwise)
- "Towercount", 13 bits, range = 0..8191
- "Minimum bias", 4 bits, range = 0..15
- "Asymmetry", 8 bits, range = 0..255 (used 0..100)
- "Centrality", 8 bits, used as signals

Frame 0: The data structure of "total Et" (ET) quantity [including "total Et from ECAL only" (ETTEM) and "minimum bias HF+ threshold 0" bits].

Frame 1: The data structure of "total calibrated Et in jets" (HT) quantity [including "tower-count" and "minimum bias HF- threshold 0" bits].

Frame 2: The data structure of "missing Et" ( $ET_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits].

Frame 3: The data structure of "missing Ht" ( $HT_{\text{miss}}$ ) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits].

Frame 4: The data structure of "missing Et including HF" ( $ET_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)].

Frame 5: The data structure of "missing Ht including HF" ( $HT_{\text{miss}}^{\text{HF}}$ ) quantity [including "Asymmetry" ASYMHTHF and "Centrality" bits (7:4)].



#### 1.4.4 Definitions of Muon data

Eight Muon objects are provided by Global Muon Trigger. One Muon object has a 64 bits data structure with parameters for  $p_T$ , for unconstrained  $p_T$ , for impact parameter, for position, charge, quality and isolation information (see also [1.2.2](#)):

- 10 bits azimuth angle ( $\varphi$ ) position, range =  $2\pi$ , step  $\approx 2\pi/576$  ( $\approx 0.625^\circ$ ), 576 bins (HW index = 0..0x23F), HW index starting at  $0^\circ$  (anti-clockwise)
- 9 bits  $p_T$ , range = 0..255 GeV (HW index = 0..0xFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFF): meaning has to be defined
- 4 bits quality, 16 types for quality (meaning not defined yet!)
- 9 (8+1 sign) bits pseudo-rapidity ( $\eta$ ) position, range = -2.45 to 2.45, step = 0.087/8, linear scale, 452 bins (-225..225, HW index = 0x11F..0x0E1)
- 2 bits isolation, 4 types for isolation (meaning not defined yet!)
- 1 bit charge sign, charge sign = '0' means "positive" charge, charge sign = '1' means "negative" charge
- 1 bit charge valid (= '1' means "valid")
- 7 index bits
- 10 bits azimuth angle ( $\varphi$ ) position, raw data
- 8 bits unconstrained  $p_T$ , range = 0..255 GeV (HW index = 0..0xFF), step = 1.0, the highest bin will mark an overflow (HW index 0xFF)
- 1 spare bit
- 2 bits impact parameter

The representation of the 9 bits (called "hardware index [HW index]") in  $\eta$  is expected as Two's Complement notation as shown in [Table 5](#).

The central value of the bin 0 ( $-0.010875/2$  to  $+0.010875/2$ ) = 0.0, the left edge of the bins will range from  $-255 \times 0.010875 - 0.010875/2 = -2.7785625$  to  $+255 \times 0.010875 - 0.010875/2 = 2.7676875$ . The central value of the bins will range between  $\pm 2.773125$ . The physical  $\eta$  range of the muon detectors is about  $\pm 2.45$ , so that not all possible  $\eta$  bins will be used.

The representation of the 10 bits in  $\varphi$  is expected as shown in [Table 6](#).

The representation of the 4 bits for quality is expected as shown in [Table 7](#).

The representation of the 2 bits for isolation is expected as shown in [Table 9](#).

The representation of the 2 bits for impact parameter is expected as shown in [Table 9](#).

Table 5:  $\eta$  scale of muon objects

| HW index | $\eta$ range                         | $\eta$ bin |
|----------|--------------------------------------|------------|
| 0x0E1    | $224.5*0.087/8$ to $225.5*0.087/8$   | 225        |
| 0x0E0    | $223.5*0.087/8$ to $224.5*0.087/8$   | 224        |
| ...      | ...                                  | ...        |
| 0x001    | $0.5*0.087/8$ to $1.5*0.087/8$       | 1          |
| 0x000    | $0.5*-0.087/8$ to $0.5*0.087/8$      | 0          |
| 0x1FF    | $0.5*-0.087/8$ to $1.5*-0.087/8$     | -1         |
| 0x1FE    | $1.5*-0.087/8$ to $-2.5*0.087/8$     | -2         |
| ...      | ...                                  | ...        |
| 0x11F    | $-224.5*0.087/8$ to $-225.5*0.087/8$ | -225       |

Table 6:  $\varphi$  scale of muon objects

| HW index | $\varphi$ range            | $\varphi$ range [degrees] | $\varphi$ bin |
|----------|----------------------------|---------------------------|---------------|
| 0x000    | 0 to $2\pi/576$            | 0 to 0.625                | 0             |
| 0x001    | $2\pi/576$ to $2*2\pi/576$ | 0.625 to 1.250            | 1             |
| ...      | ...                        | ...                       | ...           |
| 0x23F    | $575*2\pi/576$ to $2\pi$   | 359.375 to 360            | 575           |

Table 7: Definition of muon quality bits

| bits [22..19] | definition         |
|---------------|--------------------|
| 0000          | quality "level 0"  |
| 0001          | quality "level 1"  |
| ...           | ...                |
| 1110          | quality "level 14" |
| 1111          | quality "level 15" |

Table 8: Definition of muon isolation bits

| bits [33..32] | definition   |
|---------------|--------------|
| 00            | not isolated |
| 01            | isolated     |
| 10            | TBD          |
| 11            | TBD          |

Table 9: Definition of muon impact parameter bits

| bits [63..62] | definition |
|---------------|------------|
| 00            | TBD        |
| 01            | TBD        |
| 10            | TBD        |
| 11            | TBD        |

### 1.4.5 Calculation of object cuts

List of object cuts:

- $p_T$
- $\eta$
- $\varphi$
- isolation
- DISP
- charge
- quality
- unconstrained  $p_T$
- impact parameter

#### 1.4.5.1 Object cuts

The comparisons for objects cuts are done by:

A comparator between the energy ( $p_T$ ) and a threshold ( $pt\_threshold$ ) with 'mode-selection'. Similar for unconstrained  $p_T$ .

The comparison in  $\eta$  is done with five "window"-comparators, so one gets max. five ranges for  $\eta$ . The  $\eta$  value (HW index) has a Two's Complement notation, the comparisons is done signed. Number of windows is given for  $\eta$ .

The comparison in  $\varphi$  is done with two "window"-comparators, so one gets two ranges for  $\varphi$ . The comparisons is done unsigned. Number of windows is given for  $\varphi$ .

There are two cases how the limits of one "window"-comparator could be set (see also Figure 4):

- Upper limit is less than lower limit  $\Rightarrow \varphi$  range between the limits, including the  $\varphi$  bin with value = 0 (HW index).
- Upper limit is greater/equal than lower limit  $\Rightarrow \varphi$  range between the limits, not including the  $\varphi$  bin with value = 0 (HW index).

```
phi_comp_w1 <= '1' when phi_w1_upper_limit < phi_w1_lower_limit and
                    (phi <= phi_w1_upper_limit or phi >= phi_w1_lower_limit) else
                    '1' when phi_w1_upper_limit >= phi_w1_lower_limit and
                    (phi <= phi_w1_upper_limit and phi >= phi_w1_lower_limit)
                    else '0';
```

Only one of the required ranges ("windows") must be fulfilled by  $\eta$  and  $\varphi$  values ("or").

The comparisons for isolation, quality and impact parameter are done with LUTs.  
The comparison for charge is done with requested charge.  
If DISP bit is set to 1, then the jet has been tagged as an LLP jet. A one bit requirement is given for DISP for comparison.

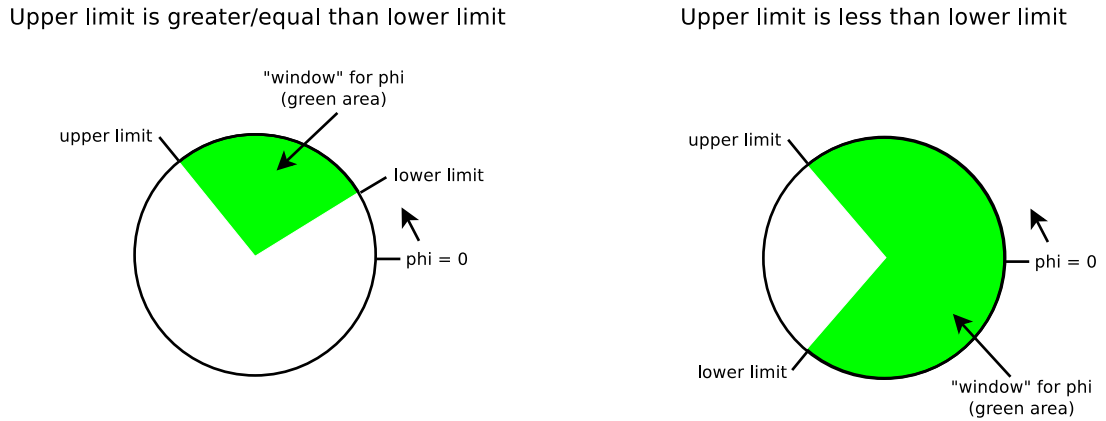


Figure 4: Setting the limits for "window"-comparators for  $\varphi$

The comparison of isolation (for electron/ $\gamma$ , tau and muon) is done with a LUT (Table 10). [To ignore quality comparison, all bits in the LUT have to be '1'.]

The comparison of impact parameter is done with LUT (Table 11). [To ignore quality comparison, all bits in the LUT have to be '1'.]

The comparison of quality is done with LUT (Table 12). [To ignore quality comparison, all bits in the LUT have to be '1'.]

Charge valid and charge sign bits must be equal to the requested charge.

Table 10: LUT contents for isolation comparison

| LUT content (4 bits) | isolation (2 bits)   | trigger   |
|----------------------|----------------------|---|
| X"0"                 | xx                   | no trigger  |
| X"1"                 | 00                   | trigger on isolation bits = 00  |
| X"2"                 | 01                   | trigger on isolation bits = 01  |
| X"3"                 | 00 or 01             | trigger on isolation bits = 00 or 01                                    |
| X"4"                 | 10                   | trigger on isolation bits = 10  |
| X"5"                 | 00 or 10             | trigger on isolation bits = 00 or 10                                    |
| X"6"                 | 01 or 10             | trigger on isolation bits = 01 or 10                                    |
| X"7"                 | 00 or 01 or 10       | trigger on isolation bits = 00 or 01 or 10                              |
| X"8"                 | 11                   | trigger on isolation bits = 11  |
| X"9"                 | 00 or 11             | trigger on isolation bits = 00 or 11                                    |
| X"A"                 | 01 or 11             | trigger on isolation bits = 01 or 11                                    |
| X"B"                 | 00 or 01 or 11       | trigger on isolation bits = 00 or 01 or 11                              |
| X"C"                 | 10 or 11             | trigger on isolation bits = 10 or 11                                    |
| X"D"                 | 00 or 10 or 11       | trigger on isolation bits = 00 or 10 or 11                              |
| X"E"                 | 01 or 10 or 11       | trigger on isolation bits = 01 or 10 or 11                              |
| X"F"                 | 00 or 01 or 10 or 11 | trigger on isolation bits = 00 or 01 or 10 or 11 (= "ignore" isolation) |

Table 11: LUT contents for impact parameter comparison

| LUT content (4 bits) | impact parameter (2 bits) | trigger   |
|----------------------|---------------------------|---|
| X"0"                 | xx                        | no trigger  |
| X"1"                 | 00                        | trigger on impact parameter bits = 00   |
| X"2"                 | 01                        | trigger on impact parameter bits = 01   |
| X"3"                 | 00 or 01                  | trigger on impact parameter bits = 00 or 01   |
| X"4"                 | 10                        | trigger on impact parameter bits = 10   |
| X"5"                 | 00 or 10                  | trigger on impact parameter bits = 00 or 10   |
| X"6"                 | 01 or 10                  | trigger on impact parameter bits = 01 or 10   |
| X"7"                 | 00 or 01 or 10            | trigger on impact parameter bits = 00 or 01 or 10                                     |
| X"8"                 | 11                        | trigger on impact parameter bits = 11   |
| X"9"                 | 00 or 11                  | trigger on impact parameter bits = 00 or 11   |
| X"A"                 | 01 or 11                  | trigger on impact parameter bits = 01 or 11   |
| X"B"                 | 00 or 01 or 11            | trigger on impact parameter bits = 00 or 01 or 11                                     |
| X"C"                 | 10 or 11                  | trigger on impact parameter bits = 10 or 11   |
| X"D"                 | 00 or 10 or 11            | trigger on impact parameter bits = 00 or 10 or 11                                     |
| X"E"                 | 01 or 10 or 11            | trigger on impact parameter bits = 01 or 10 or 11                                     |
| X"F"                 | 00 or 01 or 10 or 11      | trigger on impact parameter bits = 00 or 01 or 10 or 11 (= "ignore" impact parameter) |

Table 12: LUT contents for quality comparison of muon objects

| LUT content (16 bits) | quality bits (4 bits) | trigger                                      |
|-----------------------|-----------------------|--|
| X"0000"               | xxxx                  | no trigger                                   |
| X"0001"               | 0000                  | trigger on quality "level 0"                 |
| X"0002"               | 0001                  | trigger on quality "level 1"                 |
| X"0003"               | 0001 or 0000          | trigger on quality "level 1" or "level 0"    |
| X"0004"               | 0010                  | trigger on quality "level 2"                 |
| ...                   | ...                   | ...  |
| X"8000"               | 1111                  | trigger on quality "level 15"                |
| X"C000"               | 1111 or 1110          | trigger on quality "level 15" or "level 14"  |
| ...                   | ...                   | ...  |
| X"FFFF"               | xx                    | trigger on all quality "levels" (= "ignore") |



### 1.4.6 Calculation of correlation cuts

The following cuts are used for two objects correlations:

- $\Delta\eta$  (DETA).
- $\Delta\varphi$  (DPHI).
- $\Delta R$  (DR).
- charge correlation (only for muon).
- Cuts for mass (MASS) of following mass types:
  - Invariant mass.
  - Invariant mass with unconstrained pt (for muons only).
  - Invariant mass over  $\Delta R$ .
  - Transverse mass.
- Two-body pt.

There is one mass cut for correlations with three objects:

- Invariant mass for three objects (MASS).

The generation of look-up-tables (LUTs) for calculations of correlation cuts is described in chapter "Calculation of look-up-tables (LUTs) for correlation cuts" (see [1.4.7](#)).

#### Calculation of $\Delta\eta$

The calculation of  $\Delta\eta$  of two objects is done with formula:

$$\Delta\eta = \text{abs}(\eta_1 - \eta_2)$$

where  $\eta_1$  and  $\eta_2$  are represented in signed hardware indices.

#### Calculation of $\Delta\varphi$

The calculation of  $\Delta\varphi$  of two objects is done with formula:

$$\Delta\varphi = \text{abs}(\varphi_1 - \varphi_2) \text{ with } (" \varphi \text{ full bin range} " - \Delta\varphi) \text{ when } (\Delta\varphi > " \varphi \text{ half bin range} ").$$

where  $\varphi_1$  and  $\varphi_2$  are represented in unsigned hardware indices.

#### $\Delta R$ calculation

The calculation of  $\Delta R$  of two objects is done with formula:

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of  $\Delta R^2$  in VHDL (no square root in VHDL) is done by adding the square of  $\Delta\eta$  and  $\Delta\varphi$  LUT values.

#### Invariant mass calculation

The calculation of *invariant mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

The calculation of  $\frac{M^2}{2}$  in VHDL (no square root in VHDL) is done by multiplying LUT values of pt1, pt2 and the difference of  $\cosh(\Delta\eta)$  and  $\cos(\Delta\varphi)$ .

### Transverse mass calculation

The calculation of *transverse mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(1 - \cos(\varphi_1 - \varphi_2))}.$$

Calculation similar to "Invariant mass calculation".

### Invariant mass over $\Delta R$ calculation

The formulas for *invariant mass over  $\Delta R$  of two objects* are:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of *invariant mass over  $\Delta R$  of two objects* is done with  $\frac{M^2}{2} \times (1/\Delta R^2)$  (no square root in VHDL).

A direct calculation of  $1/\Delta R^2$  is not possible in firmware (VHDL code), therefore the implementation of the calculation is done by LUTs. In the hardware the values of these LUTs are stored in "large" ROMs, which was realized using the Block RAMs (BRAMs) of the Virtex chip.

Due the limited number of available BRAMs there are some restrictions for creating algorithms with *invariant mass over  $\Delta R$* :

- Objects must have the same type (e.g.: "muon muon", "eg eg", ...)
- Objects must be of same bx
- Resolution of  $\Delta\eta$  and  $\Delta\varphi$ :
  - Full resolution for calos (max. deta bins=230, max. dphi bins=72)
  - Half resolution only for muons (max. deta bins=226, max. dphi bins=144)
- If  $1/\Delta R^2=0$  ( $\Delta\eta=0$  and  $\Delta\varphi=0$ ) then correlation cut *invariant mass over  $\Delta R$*  is true
- The values of LUTs are only valid for current definitions and restrictions. Every change might cause a recalculation of the values and a regeneration of IPs (representing LUTs in BRAMs) in Vivado (firmware generation tool)

The values of LUTs in firmware are listed in coe files of ROMs (created by same scripts mentioned above), currently 5 ROMs for "calo calo" and 6 ROMs for "muon muon" (see [lut\\_calor\\_inv\\_dr\\_sq\\_rom1.coe](#), etc. and [lut\\_muon\\_inv\\_dr\\_sq\\_rom1.coe](#), etc.). The addresses of the BRAMs are given by  $\Delta\eta$  and  $\Delta\varphi$ . All ROMs for calos have 4096 addresses, for muons 8192 addresses. The data width of ROMs is different depending on the highest LUT value in ROM. Because of these different data widths, the partitioning of several ROMs was done to save BRAM resources. Currently 873 BRAMs (36kb) are available per Virtex chip. Following numbers of BRAMs (36kb) are needed for:

- "calo calo": 660
- "muon muon": 672

Currently one calculation of *invariant mass over  $\Delta R$*  of "calo calo" or "muon muon" is possible in one Virtex chip, but one can have some algorithms containing *invariant mass over  $\Delta R$*  with different thresholds, but with same objects and same bx.

### Invariant mass calculation for three objects

The calculation of *invariant mass calculation for three objects* is done by calculating the invariant mass for all two-object combinations and take the sum of the three invariant masses of the two-object combinations.

### Two-body pt calculation

The calculation of *two-body pt* is done with formula:

$$pt = \sqrt{pt_1^2 + pt_2^2 + 2pt_1pt_2(\cos(\varphi_1)\cos(\varphi_2) + \sin(\varphi_1)\sin(\varphi_2))}$$

The calculation of  $pt^2$  in VHDL (no square root in VHDL) using LUTs for  $pt_1$ ,  $pt_2$ ,  $\cos(\varphi)$  and  $\sin(\varphi)$ .

### Muon charge correlation

For definition of muon charge, see [1.4.4](#).

In the muon charge correlation module ([muon\\_charge\\_correlations.vhd](#)), the charge correlations are made for different muon conditions-types. The module is instantiated in the top-of-hierarchy module ([gt1\\_module.vhd](#)) and not inside of a muon conditions module. The charges of objects (number of objects depends on muon condition type) are compared to get "like sign charge" ("LS") or "opposite sign charge" ("OS"), "LS" means that the charges (charge sign) of objects are the same, "OS" means that at least one object has different charge than the others. This information is used in all instantiated muon conditions. There is no charge correlation for single type conditions.

In all cases the "charge valid" bit of the objects must be set.

In TME one can select "LS", "OS" or ignore for charge correlation in muon conditions.

Table 13: Muon charge correlation - Double Muon

|     |  |
|-----|--|
| x x | I ignore (charge x = +, -, I)                          |
| + + | LS both positive muons                                 |
| - - | LS both negative muons                                 |
| I I | LS both muons with the same sign, positive or negative |
| + - | OS two muons of opposite sign                          |
| - + | OS idem  |
| I I | OS idem  |

Table 14: Muon charge correlation - Triple Muon

|       |  |
|-------|--|
| x x x | I ignore (charge x = +, -, I)                          |
| + + + | LS three muons of positive charge                      |
| - - - | LS three muons of negative charge                      |
| I I I | LS three muons of the same sign (positive or negative) |
| + + - | OS a pair plus a positive muon                         |
| + - - | OS a pair plus a negative muon                         |
| + - I | OS a pair plus a negative or positive muon             |

Table 15: Muon charge correlation - Quad Muon

|         |   |
|---------|---|
| x x x x | I ignore (charge x = +, -, I)                         |
| + + + + | LS four muons of positive charge                      |
| - - - - | LS four muons of negative charge                      |
| I I I I | LS four muons of the same sign (positive or negative) |
| + + + - | OS a pair plus two positive muons                     |
| + + - - | OS two pairs  |
| + - - - | OS a pair plus two negative muons                     |
| + - I I | OS a pair plus two negative or positive muons         |

### 1.4.7 Calculation of look-up-tables (LUTs) for correlation cuts

LUTs are defined as a VHDL "constant" in `gt1_luts_pkg.vhd` (VHDL package file). The values of precision and step size are given by "scale\_set" in XML file of a L1 menu.

Overview of precision types for correlation cuts (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

- *EG-EG-Delta* relevant for DeltaEta and DeltaPhi LUTs
- *EG-EG-MassPt* relevant for pt and unconstrained pt LUTs (used in mass and two-body pt calculations)
- *EG-EG-Math* relevant for  $\cos(\text{DeltaPhi})$  and  $\cosh(\text{DeltaEta})$  LUTs (used in mass calculations)
- *EG-EG-InverseDeltaRMath* relevant for  $1/\text{DeltaR}$  LUTs (used in mass over deltaR calculations)
- *EG-EG-TwoBodyPtMath* relevant for  $\cos(\text{Phi})$  and  $\sin(\text{Phi})$  LUTs (used in two-body pt calculations)
- *EG-EG-DeltaOverlapRemoval* is obsolete, used EG-EG-Delta (same scales for  $\eta$  and  $\varphi$ )
- *EG-EG-Mass* currently not used
- *EG-EG-TwoBodyPt* is obsolete, used EG-EG-MassPt

Overview of precision names (example for "MassPt"):

EG-EG-MassPt  
EG-JET-MassPt  
EG-TAU-MassPt  
JET-JET-MassPt  
JET-TAU-MassPt  
EG-ETM-MassPt  
JET-ETM-MassPt  
TAU-ETM-MassPt  
EG-HTM-MassPt  
JET-HTM-MassPt  
TAU-HTM-MassPt  
EG-ETMHF-MassPt  
JET-ETMHF-MassPt  
TAU-ETMHF-MassPt  
EG-MU-MassPt  
JET-MU-MassPt  
TAU-MU-MassPt  
MU-MU-MassPt  
MU-ETM-MassPt  
MU-HTM-MassPt

## MU-ETMHF-MassPt

**LUTs for  $p_T$  and unconstrained  $p_T$  used in mass and two-body pt calculations**

The values of  $p_T$  or unconstrained  $p_T$  LUT are calculated by building the half difference of maximum and minimum value of a bin, adding minimum value, rounding at precision position after decimal point and multiplying with  $10^{\text{precision}}$  to get integer values.

The address input of the LUT for  $p_T$  or unconstrained  $p_T$  is the value of hardware index of  $p_T$  or unconstrained  $p_T$ .

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-MassPt</type>
...
<n_bits>1</n_bits>
</scale>
```

VHDL names of  $p_T$  and unconstrained  $p_T$  LUTs:

EG\_PT\_LUT (used also for tau)

JET\_PT\_LUT

ETM\_PT\_LUT (used also for  $HT_{\text{miss}}$  and  $ET_{\text{miss}}^{HF}$ )

MU\_PT\_LUT

MU\_UPT\_LUT

**LUTs for  $\Delta\eta$** 

The values of the LUT are calculated by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, rounding at precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT is the value of  $\Delta\eta$  in hardware indices.

The precision value in XML file is given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-Delta</type>
...
<n_bits>3</n_bits>
</scale>
```

where  $\langle n\_bits \rangle$  is the precision value and  $\langle type \rangle$  represents a precision name.

The  $\eta$  ( $=\Delta\eta$ ) step size in XML file is given by (an example for electron/ $\gamma$ ):

```
<scale>
<object>EG</object>
<type>ETA</type>
```

...  
<step>+4.3499999999999997E-02</step>  
...  
</scale>

VHDL names of  $\Delta\eta$  LUTs:

CALO\_CALO\_DIFF\_ETA\_LUT  
CALO\_MU\_DIFF\_ETA\_LUT  
MU\_MU\_DIFF\_ETA\_LUT

### LUTs for $\Delta\varphi$

The values of the LUT are calculated by multiplying  $\Delta\varphi$  in hardware indices with  $\varphi$  step size, rounding at precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT is the value of  $\Delta\varphi$  in hardware indices.

The precision values of  $\Delta\varphi$  are identical with  $\Delta\eta$ .

The  $\varphi$  ( $=\Delta\varphi$ ) step size in XML file is given by (an example for electron/ $\gamma$ ):

<object>EG</object>  
<type>PHI</type>  
...  
<step>+4.3633231299858237E-02</step>  
...  
</scale>

VHDL names of  $\Delta\varphi$  LUTs:

CALO\_CALO\_DIFF\_PHI\_LUT  
CALO\_MU\_DIFF\_PHI\_LUT  
MU\_MU\_DIFF\_PHI\_LUT

### LUTs for $\cosh(\Delta\eta)$ used in mass calculations

The values in the LUT are calculated by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, calculating cosine hyperbolic, rounding at "Math" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT for  $\cosh(\Delta\eta)$  is the value of  $\Delta\eta$  in hardware indices.

For calo muon correlations one has to use the muon step size.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

<scale>  
<object>PRECISION</object>  
<type>EG-EG-Math</type>

...

`<n_bits>3</n_bits>`

`</scale>`

used for  $\cosh(\Delta\eta)$  and  $\cos(\Delta\varphi)$ .

VHDL names of  $\cosh(\Delta\eta)$  LUTs:

CALO\_CALO\_COSH\_DETA\_LUT

CALO\_MUON\_COSH\_DETA\_LUT

MU\_MU\_COSH\_DETA\_LUT

### **LUTs for $\cos(\Delta\varphi)$ used in mass calculations**

The values in the LUT are calculated by multiplying  $\Delta\varphi$  in hardware indices with  $\varphi$  step size, calculating cosine, rounding at "Math" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The address of the LUT for  $\cos(\Delta\varphi)$  is the value of  $\Delta\varphi$  in hardware indices. For calo muon correlations one has to use the muon step size.

VHDL names of  $\cos(\Delta\varphi)$  LUTs:

CALO\_CALO\_COS\_DPFI\_LUT

CALO\_MUON\_COS\_DPFI\_LUT

MU\_MU\_COS\_DPFI\_LUT

### **LUTs for $1/\Delta R^2$ used in mass over deltaR calculations**

The calculation of  $1/\Delta R^2$  is done by multiplying  $\Delta\eta$  in hardware indices with  $\eta$  step size, making the square, doing the same for  $\Delta\varphi$ , adding the squares, inverting the sum, rounding at "InverseDeltaRMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values. The address of the two-dimensional LUT for  $1/\Delta R^2$  consists of values of  $\Delta\eta$  and  $\Delta\varphi$  in hardware indices.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

`<scale>`

`<object>PRECISION</object>`

`<type>EG-EG-InverseDeltaRMath</type>`

...

`<n_bits>5</n_bits>`

`</scale>`

Precision names for "InverseDeltaRMath":

EG-EG-InverseDeltaRMath

JET-JET-InverseDeltaRMath

TAU-TAU-InverseDeltaRMath

MU-MU-InverseDeltaRMath



**LUTs for  $\cos(\varphi)$  used in two-body pt calculations**

The values in the LUT are calculated by building the half difference of maximum and minimum value of a  $\varphi$  bin, adding minimum value, calculating cosine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

The precision values in XML file are given by (an example for electron/ $\gamma$  electron/ $\gamma$  correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-TwoBodyPtMath</type>
...
<n_bits>3</n_bits>
</scale>
```

used for  $\cos(\varphi)$  and  $\sin(\varphi)$ .

VHDL names of  $\cos(\varphi)$  LUTs:

CALO\_COS\_PHI\_LUT  
MUON\_COS\_PHI\_LUT

**LUTs for  $\sin(\varphi)$  used in two-body pt cuts**

The values in the LUT are calculated by building the half difference of maximum and minimum value of a  $\varphi$  bin, adding minimum value, calculating sine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with  $10^{\text{precision}}$  to get integer values.

VHDL names of  $\sin(\varphi)$  LUTs:

CALO\_SIN\_PHI\_LUT  
MUON\_SIN\_PHI\_LUT

### 1.4.8 Combination conditions

#### 1.4.8.1 Combination conditions definition

A condition consists of input data and a set of requirements, which contain the requirements to be complied. The requirements are called "object cuts".

The requirement list contains:

thresholds for  $p_T$ , ranges for  $\eta$  and  $\varphi$ , LUTs for isolation, LUTs for quality, requested charges, thresholds for unconstrained  $p_T$ , a LUT for impact parameter. The condition is complied, if every comparison between object parameters and requirements is valid for the following object cuts (only for requested cuts):

For Calorimeter input data:

- $p_T$  greater-equal (or equal) threshold
- $\eta$  in range
- $\varphi$  in range
- iso LUT

For Muon input data:

- $p_T$  greater-equal (or equal) threshold
- $\eta$  in range
- $\varphi$  in range
- iso LUT
- requested charge
- quality LUT
- unconstrained  $p_T$  greater-equal (or equal) threshold
- impact parameter LUT

There are different types of conditions implemented, depending of how many objects have to comply the requirements.

- "Quad objects requirements condition": this condition type consists of requirements for 4 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 4 different objects, each of which fulfills at least one of the requirements.
- "Triple objects requirements condition": this condition type consists of requirements for 3 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 3 different objects, each of which fulfills at least one of the requirements.

- "Double objects requirements condition": this condition type consists of requirements for 2 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 2 different objects, each of which fulfills at least one of the requirements.<sup>1</sup>
- "Single object requirement condition": this condition type consists of one requirement for one trigger object of a given object type. To fulfill this condition, there must exist at least one object which fulfills the requirement.

The values of the requirements are given by VHDL Producer for every Trigger Menu.

The input data objects have to be of same type and same bunch-crossing.

With "Double objects requirements condition" a correlation cut of "two-body pt" can be required (calorimeter and muon objects).

Additionally charge correlation cuts with "Double objects requirements condition", "Triple objects requirements condition" and "Quad objects requirements condition" of muon objects can be required.

---

<sup>1</sup>"Double objects requirements condition with spatial correlation" not used anymore, replaced by Correlation conditions

Table 16: Explanation of Listing 2

| Item                | Explanation   |
|---------------------|---|
| et_ge_mode          | 'mode-selection' for the $E_T$ comparator. Valid strings are 'true' and 'false' (type is boolean), 'true' means comparator works on greater/equal, 'false' means equal (for tests only) |
| obj_type            | valid strings are 'ETT_TYPE', 'HTT_TYPE', 'ETM_TYPE', 'HTM_TYPE' and 'ETMHF_TYPE'.  |
| et_threshold        | threshold value for comparison in $E_T$ . The size of the std_logic_vector depends on the number of $E_T$ bits.   |
| phi_full_range      | boolean to set full range of $\varphi$ .  |
| phi_w1_upper_limits | "upper limit" of "window"-comparator 1 for $\varphi$ .  |
| phi_w1_lower_limits | "lower limit" of "window"-comparator 1 for $\varphi$ .  |
| phi_w2_ignore       | boolean to ignore "window"-comparator 2 for $\varphi$ .   |
| phi_w2_upper_limits | "upper limit" of "window"-comparator 2 for $\varphi$ .  |
| phi_w2_lower_limits | "lower limit" of "window"-comparator 2 for $\varphi$ .  |
| clk                 | clock input (LHC clock).  |
| data_i              | input data, structure defined in obj_type.  |
| condition_o         | output of condition (routed to Algorithms logic, see 1.4.15).   |

## 1.4.9 Energy sum quantities conditions

### 1.4.9.1 Energy sum quantities conditions module (including Asymmetry conditions)

For the entity-declaration of `esums_conditions.vhd`, see Listing 2.

Listing 2: Entity declaration of `esums_conditions.vhd`

```

entity esums_conditions is
  generic
    et_ge_mode : boolean;
    obj_type : natural := ETT_TYPE; -- ett=0, ht=1, etm=2, htm=3
    et_threshold: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0);
    phi_full_range : boolean;
    phi_w1_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w1_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w2_ignore : boolean;
    phi_w2_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w2_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
  ;
  port(
    clk : in std_logic;
    data_i : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    condition_o : out std_logic
  );
end esums_conditions;

```

A comparator between  $E_T$  and a threshold (`et_threshold`) and, depending on object type, a comparison in  $\varphi$  with two "window"-comparators is done in this module. The value for  $E_T$  threshold, the 'mode-selection' for the  $E_T$  comparator and the limits for the "window"-comparators are given in the generic interface list of the module. The selection whether a comparison in  $\varphi$  is part of the condition is done with the value of the generic parameter 'obj\_type' ('ETM\_TYPE', 'ETMHF\_TYPE', 'HTM\_TYPE' and 'HTMHF\_TYPE' force a comparison). The comparison in  $\varphi$  is done in the same way as for calorimeter conditions. Additionally the data-structure of input data (`data_i` in port interface list) is provided as a record in this list. The output signal of the module is in high state, if all comparisons are true.

Data for Asymmetry trigger are received on 4 frames on bits 27..20 (8 bits). For every type a comparison with an 8-bit threshold (greater-equal [or equal]) is done. Asymmetry data are interpreted as counts.

#### 1.4.10 Minimum bias trigger conditions

Data for Minimum bias trigger are received on the 4 MSBs of 4 frames used for Energy sum quantities (see [1.4.9](#)).

- MBT0HFP: "minimum bias HF+ threshold 0" bits
- MBT0HFM: "minimum bias HF- threshold 0" bits
- MBT1HFP: "minimum bias HF+ threshold 1" bits
- MBT1HFM: "minimum bias HF- threshold 1" bits

In minimum bias trigger conditions module there is a comparison with a 4-bit threshold (greater-equal [or equal]).

#### 1.4.11 Towercount condition

Data for Towercount trigger (number of firing HCAL towers) are received on frame HT (see [1.4.9](#)) on bits 24..12 (13 bits) of HT data structure.

In towercount condition module there is a comparison with a 13-bit threshold (greater-equal [or equal]).

#### 1.4.12 Centrality condition

Centrality bits used as a signals for triggers (similar to external signals).

### 1.4.13 Correlation conditions

The correlation conditions contain a combination of two "Single object requirement conditions" of two object types or one "Double objects requirement condition" of objects of the same type. In addition with object cuts there are correlation cuts for  $\Delta\eta$ ,  $\Delta\varphi$ ,  $\Delta R$ , mass, mass divided by  $\Delta R$  and "two-body pt".

The correlation condition of "Invariant mass for three objects" contains one "Triple objects requirement condition" of objects of the same type with one object cut for mass.

List of correlation cuts in [1.4.6](#).

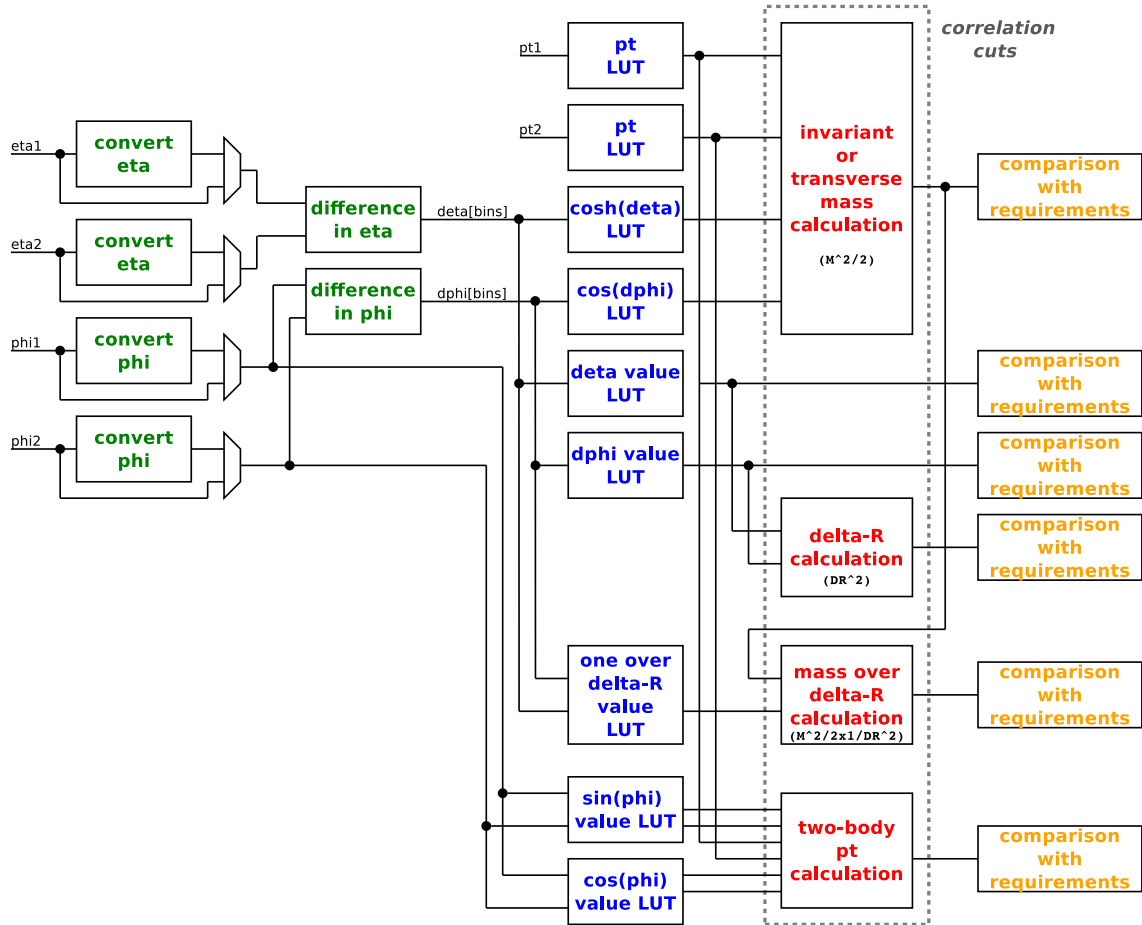


Figure 5: VHDL structure of cuts for correlation conditions

### Overview of correlation cuts in conditions

The following list gives an overview of possible correlation cuts in conditions:

- Calo conditions:
  - two-body pt (for double condition)
- Calo conditions overlap removal:

- $\Delta\eta$  overlap removal
  - $\Delta\varphi$  overlap removal
  - $\Delta R$  overlap removal
  - two-body pt (for double condition)
- Muon conditions:
  - charge correlation
  - two-body pt (for double condition)
- Calo calo correlation condition with calo overlap removal:
  - $\Delta\eta$  overlap removal
  - $\Delta\varphi$  overlap removal
  - $\Delta R$  overlap removal
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo calo correlation condition:
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo calo correlation condition for invariant mass divided by  $\Delta R$ :
  - invariant mass divided by  $\Delta R$
- Calo calo correlation condition mass with three objects:
  - invariant mass with three objects
- Calo muon correlation condition:
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass
  - two-body pt
- Calo esums correlation condition:



- $\Delta\varphi$
  - transverse mass
  - two-body pt
- Muon muon correlation condition:
  - charge correlation
  - $\Delta\eta$
  - $\Delta\varphi$
  - $\Delta R$
  - invariant mass or invariant mass unconstraint pt
  - two-body pt
- Muon muon correlation condition for invariant mass divided by  $\Delta R$ :
  - charge correlation
  - invariant mass divided by  $\Delta R$
- Muon muon correlation condition mass with three objects:
  - charge correlation
  - invariant mass with three objects
- Muon esums correlation condition:
  - $\Delta\varphi$
  - transverse mass
  - two-body pt

#### 1.4.13.1 Correlation condition module

As described in section Correlation conditions (1.4.13), correlations of two object types are available. Therefore several correlations (objects 1-objects 2) are possible:

- Correlation condition with calorimeter objects  
electron/ $\gamma$ -electron/ $\gamma$ , electron/ $\gamma$ -jet, electron/ $\gamma$ -tau, jet-jet, jet-tau and tau-tau.
- Correlation condition with calorimeter objects and energy sum quantities ( $ET_{\text{miss}}$ ,  $ET_{\text{miss}}^{HF}$  and  $HT_{\text{miss}}$  only)  
electron/ $\gamma$ -etm, jet-etm, tau-etm, electron/ $\gamma$ -htm, jet-htm, tau-htm, electron/ $\gamma$ -etmhf, jet-etmhf and tau-etmhf.
- Correlation condition with calorimeter objects and muons objects  
electron/ $\gamma$ -muon, jet-muon and tau-muon.
- Correlation condition with muon objects

- Correlation condition with muon objects and energy sum quantities ( $ET_{\text{miss}}$ ,  $ET_{\text{miss}}^{HF}$  and  $HT_{\text{miss}}$  only)  
muon-etm, muon-etmhf and muon-htm.

There are two correlations for mass with three objects:

- Correlation condition for mass with three objects with calorimeter objects (same type, same bunch-crossing)
- Correlation condition for mass with three objects with muon objects

#### 1.4.14 External Conditions

Maximal 256 External Conditions are possible in Global Trigger. They are provided as inputs in the Algorithms logic of  $\mu$ GTL. External Conditions will include the "Technical Trigger" of the legacy system.

#### 1.4.15 Algorithms logic

The outputs of all the instantiated conditions are combined in the Algorithms logic with boolean algebra given by TME for every single Algorithm. These Algorithms are registered and provided as inputs for Final Decision Logic.

## List of Tables

|    |   |    |
|----|---|----|
| 2  | $\eta$ scale of calorimeter objects . . . . .                 | 12 |
| 3  | $\varphi$ scale of calorimeter objects . . . . .              | 12 |
| 4  | Definition of $e/\gamma$ and tau isolation bits . . . . .     | 13 |
| 5  | $\eta$ scale of muon objects . . . . .                        | 17 |
| 6  | $\varphi$ scale of muon objects . . . . .                     | 17 |
| 7  | Definition of muon quality bits . . . . .                     | 17 |
| 8  | Definition of muon isolation bits . . . . .                   | 17 |
| 9  | Definition of muon impact parameter bits . . . . .            | 18 |
| 10 | LUT contents for isolation comparison . . . . .               | 21 |
| 11 | LUT contents for impact parameter comparison . . . . .        | 22 |
| 12 | LUT contents for quality comparison of muon objects . . . . . | 23 |
| 13 | Muon charge correlation - Double Muon . . . . .               | 27 |
| 14 | Muon charge correlation - Triple Muon . . . . .               | 27 |
| 15 | Muon charge correlation - Quad Muon . . . . .                 | 27 |
| 16 | Explanation of Listing 2 . . . . .                            | 35 |

## List of Figures

|   |  |    |
|---|--|----|
| 1 | <a href="#">μGTL firmware . . . . .</a>  | 4  |
| 2 | <a href="#">VHDL file generation by VHDL Producer . . . . .</a>                                | 9  |
| 3 | <a href="#">Scheme of μGTL pipeline structure . . . . .</a>                                    | 10 |
| 4 | <a href="#">Setting the limits for "window"-comparators for <math>\varphi</math> . . . . .</a> | 20 |
| 5 | <a href="#">VHDL structure of cuts for correlation conditions . . . . .</a>                    | 38 |

## Glossary

**electron/ $\gamma$**  = electron/gamma objects over Calo-Layer2 (VHDL: eg)

**jet** = jet objects over Calo-Layer2 (VHDL: jet)

**tau** = tau objects over Calo-Layer2 (VHDL: tau)

**muon** = muon objects over  $\mu$ GMT (VHDL: muon)

**ET** = Scalar sum of transverse energy components over Calo-Layer2 (VHDL: ett)

**ETTEM** = Scalar sum of transverse energy components from ECAL only over Calo-Layer2 (VHDL: ettem)

**MBTxHFy** = Minimum bias HF bits (VHDL: MBT0HFP, MBT0HFM, MBT1HFP, MBT1HFM)

**HT** = Magnitude of the vectorial sum of transverse energy of jets (hadronic) over Calo-Layer2 (VHDL: htt)

**TOWERCOUNT** = tower counts (VHDL: towercount)

$ET_{\text{miss}}$  = 2-vector sum of transverse energy over Calo-Layer2 (VHDL: etm)

$HT_{\text{miss}}$  = Missing Total transverse energy of jets over Calo-Layer2 (VHDL: htm)

$\mathbf{ET}_{\text{miss}}^{\text{HF}}$  = 2-vector sum of transverse energy including HF over Calo-Layer2 (VHDL: etmhf)

$\mathbf{HT}_{\text{miss}}^{\text{HF}}$  = Missing Total transverse energy of jets including HF over Calo-Layer2 (VHDL: htmhf)

**ASYMET** = Asymmetry of ET over Calo-Layer2 (VHDL: asymet)

**ASYMHT** = Asymmetry of HT over Calo-Layer2 (VHDL: asymht)

**ASYMETHF** = Asymmetry of ET including HF over Calo-Layer2 (VHDL: asymethf)

**ASYMHTHF** = Asymmetry of HT including HF over Calo-Layer2 (VHDL: asymhthf)

**CENTx** = Centrality bits [7:0] over Calo-Layer2 (VHDL: cent7, cent6, ...)

$p_{\text{T}}$  = transverse momentum of muon objects (VHDL: pt)

$E_{\text{T}}$  = energy of calorimeter objects (VHDL: et)

$\eta$  = pseudo-rapidity position (VHDL: eta)

$\varphi$  = azimuth angle position (VHDL: phi)

**isolation** = isolation information (VHDL: iso)

**quality** = quality information (VHDL: qual)

## Acronyms

**DAQ** Data Acquisition

**DM** Delay Manager Module

**FDL** Final Decision Logic Module

**GTL** Global Trigger Logic Module

**ROP** Readout-Process Module

**TCM** Timing Counter Manager Module

**TCS** Trigger Control System

**GCT** Calorimeter Trigger Layer-2

**GMT** Global Muon Trigger

**GT** Global Trigger