



Global Trigger firmware Specification for MP7 platform for Upgrade Phase I

Herbert Bergauer, Babak Rahbaran, Johannes Wittmann
Institute of High Energy Physics (HEPHY)

<http://www.hephy.at>

<http://globaltrigger.hephy.at>

February 28, 2022

Revision History

| Doc Rev | Description of Change | Revision Date |
|---------|---|---------------|
| 7.3 | Added Global Trigger input and output links description to "Appendices" (9). | 2022/02/28 |
| 7.2 | Inserted "Appendices" (9) and added references. | 2022/02/25 |
| 7.1 | Inserted "Simulation and build of firmware" and "Testing firmware" (2.2.2 and 2.2.3). | 2022/02/15 |
| 7.0 | Bug fixed in labels. Updated labels. | 2022/02/14 |
| 6.9 | Inserted "Implementation in firmware" for top-of-hierarchy of VHDL code (2.2.1). Updated labels. | 2022/02/11 |
| 6.8 | Updated text of section "Implementation in firmware" for Framework (3.1), GTL (4.3) and FDL (5.4). | 2022/02/10 |
| 6.7 | Inserted references and updated text in 2.2. | 2022/02/09 |
| 6.6 | Updated text in "Implementation in firmware" (4.3). | 2022/01/10 |
| 6.5 | Bug fixed in definition of calo eta ranges (4.4.2). | 2021/11/30 |
| 6.4 | Updated data structure for jets with DISP bit (4.2.1). | 2021/11/17 |
| 6.3 | Inserted "Calculation of look-up-tables (LUTs) for correlation cuts" (4.4.7). | 2021/11/10 |
| 6.2 | Removed "VHDL-Templates for VHDL-Producer". | 2021/09/24 |
| 6.1 | Updated (and renamed) description of "Invariant mass over delta R calculation" (see 4.4.6). | 2021/09/14 |
| 6.0 | New structure of document for firmware versions 1.12.x and higher. | 2021/02/10 |
| 5.7 | Fixed typo in section "Invariant mass calculation for three objects" 4.4.6. | 2020/12/03 |
| 5.6 | Updated text in section "VHDL-Templates for VHDL-Producer". | 2020/09/31 |
| 5.5 | Inserted links to VHDL modules. | 2020/09/18 |
| 5.4 | Updated text in section "Correlation conditions" 4.4.13. Description is for v1.10.0 of Global Trigger Logic. | 2020/09/17 |
| 5.3 | Inserted description of "Invariant mass divided by delta R calculation" (see 4.4.6). | 2020/09/10 |
| 5.2 | Fixed typo (unconstrained pt). | 2020/09/09 |
| 5.1 | Inserted text for new muon structure in sections 4.2.2, 4.4.4 and 4.4.13.1. Added subsections in section "VHDL-Templates for VHDL-Producer" | 2020/08/04 |
| 5.0 | Additional text in section for calo calo overlap remover condition module. | 2020/05/25 |
| 4.9 | Inserted text in section Calorimeter Overlap Remover conditions and Calo Calo Overlap Remover Correlation conditions. | 2020/04/16 |

| Doc Rev | Description of Change | Revision Date |
|---------|---|---------------|
| 4.8 | Updated text in sections Calorimeter conditions, Muon conditions and Correlation conditions for changes which have been done for GTL VHDL version 1.8.0 (module names without version number, "five eta cuts"). | 2019/08/13 |
| 4.7 | Inserted "Asymmetry" and "Centrality" of "Energy sums" (GTL VHDL version 1.6.0). Therefore updated sections 4.1, 4.2.1, 4.4.9 added section "Centrality condition" 4.4.12 and updated Table 4 | 2018/08/13 |
| 4.6 | Updated text in section "Global Trigger Logic" (4) according to firmware version v1.5.0 of gtl_module.vhd. | 2018/02/21 |
| 4.5 | Updated text in section "Framework" (3) according to firmware version v1.2.3 of frame.vhd. | 2018/01/19 |
| 4.4 | New "icons" ET_{miss}^{HF} and HT_{miss}^{HF} in Table 4 and Section 4. Updated glossary. | 2016/11/11 |
| 4.3 | Updated table " μ FDL register map" (24) and section "Register map" (5.5.1.1). Moved "List of Tables" and "List of Figures" to the end of document. Inserted link to "Scales for inputs to μ GT" (4.3). Moved section "Software reset" to section "Framework" as subsection (3.7). Removed empty sections "IPBus", "Firmware Configuration" and "Bibliography". | 2016/11/03 |
| 4.2 | Updated sections "Calo-Layer2 optical interfaces" (4.2.1) and "Energy sum quantities conditions" (4.4.9) for tower-count trigger bits. Inserted section "Towercount condition" (4.4.11). | 2016/10/25 |
| 4.1 | Updated section "Calo-Layer2 optical interfaces" (4.2.1) for new energy sum quantities and minimum bias trigger bits. Updated sections "Firmware" (2), "Framework" (3) and "Final Desicion Logic" (5). | 2016/06/09 |
| 4.0 | Updated Text in section "Muon Muon Correlation condition module". | 2016/01/15 |
| 3.9 | Removed "Double objects requirements condition with spatial correlation", because not used anymore in the future, replaced by Correlation conditions. | 2016/01/08 |
| 3.8 | Minor changes in text and updated Figure 10. | 2016/01/08 |
| 3.7 | Changed colour in Figure 11 and updated text for correlation conditions (see section 4.4.13. | 2016/01/07 |
| 3.6 | Updated Figures 10 and 9 and text in calo calo correlation condition module. | 2015/12/21 |
| 3.5 | Inserted drawing of VHDL structure of cuts for correlation conditions (see Figure 12). | 2015/11/18 |

| Doc Rev | Description of Change | Revision Date |
|---------|---|---------------|
| 3.4 | Updated muon η ranges (Table 11) and inserted correlation conditions. Created scheme for conversion of calorimeter η and φ to muon scale for calo-muon-correlation conditions. | 2015/11/17 |
| 3.3 | Added Text in sections calo comparator module and muon comparator module. | 2015/10/08 |
| 3.2 | Updated Text in section "Final Desicion Logic" (5). | 2015/10/06 |
| 3.1 | Updated Figure 14 and Tables 24. Remaned section "Calorimeter conditions module - version 2" to "Calorimeter conditions module - version 3", section "Muon conditions module" to "Muon conditions module - version 2" and section "Muon comparators module" to "Muon comparators module - version 2". | 2015/10/02 |
| 3.0 | Updated text and tables of η ranges for Calorimeter objects (see 4.4.2). | 2015/09/22 |
| 2.9 | Renewed Figures in GTL and FDL (see Figure 8, 9 and 10) and FDL(see Figure 14 and 15). Added register bits description of FDL Register map (see section 5.5.1.1). | 2015/09/16 |
| 2.8 | Updated text, tables and listings of section "VHDL-Templates for VHDL-Producer". | 2015/09/15 |
| 2.7 | Corrected calculation of muon η step width (see 4.4.4). | 2015/09/10 |
| 2.6 | Edited text in Table 18. | 2015/08/28 |
| 2.5 | Updated definition of η ranges for Calorimeter objects and Muon objects. | 2015/08/20 |
| 2.4 | Added section Calo Muon Correlation condition. | 2015/08/19 |
| 2.3 | Added section "Register map" (5.5.1.1) for μ FDL. | 2015/06/26 |
| 2.2 | Updated figures (8, 9 and 10) for GTL and edited section "Correlation conditions" (see 4.4.13). | 2015/05/08 |
| 2.1 | Added tables for calorimeter isolation-bits and for muon quality- and isolation-bits definition (10, 13 and 15). Edited section glossary and acronyms. | 2015/05/07 |
| 2.0 | Added text for "Energy sum conditions" (4.4.9) and updated chapters for "Calorimeter conditions" for version 2. Inserted isolation bits for electron/ γ and tau objects (4.4.2). | 2015/05/06 |
| 1.9 | Minor changes "Demux Lane Data" (see 3.3) and "Muon data" (see 4.4.4). | 2014/11/06 |
| 1.8 | Edited Section "Energy sum quantities conditions" (see 4.4.9). | 2014/10/08 |
| 1.7 | Added sections "Configuration of optical connections" (3.2), "Demux Lane Data" (3.3) and "Lane Mapping Process" (3.4) to framework. Removed tables of optical interfaces from gtl and referenced to tables in framework. | 2014/10/07 |

| Doc Rev | Description of Change | Revision Date |
|---------|---|---------------|
| 1.6 | Minor changes in "Calorimeter conditions" and "Muon conditions" . | 2014/07/01 |
| 1.5 | Updated with minor changes in "Muon conditions". | 2014/06/17 |
| 1.4 | Fixed bug in Figure 11. | 2014/04/30 |
| 1.3 | Updated section "Muon conditions". | 2014/04/22 |
| 1.2 | Removed section "Muon charge module" and added new section "Muon charge correlation module" (see 4.4.6). Edited text in section and subsections "Muon conditions definition". | 2014/04/15 |
| 1.1 | Changed Figure 11 and minor changes in text for anti-clockwise behaviour in φ . | 2014/04/04 |
| 1.0 | Added definition for "calorimeter conditions over bx", see section. | 2014/03/12 |
| 0.9 | Changed text of condition description in subsections Calo conditions definition and Muon conditions definition. | 2014/02/12 |
| 0.8 | Updated calorimeter data structure in 4.2.1. | 2013/12/03 |
| 0.7 | Updated muon data structure in 4.2.2 | 2013/12/02 |
| 0.6 | Moved decription of VHDL templates for TME to "VHDL-Templates for VHDL-Producer". | 2013/11/18 |
| 0.5 | Subsection 4.2 added to section 4. | 2013/11/11 |
| 0.4 | GTL and FDL firmware implemented for new data structure (GTL firmware version v1.0.0 [fix part of GTL], FDL firmware version v1.0.0) | 2013/11/06 |
| 0.3 | New framework implementation based on new object types definition. Additionally, the ROP is implemented based on production requirements. | 2013/10/13 |
| 0.2 | First framework implementation + ROP . | 2012/07/01 |
| 0.1 | Document created. | 2012/02/22 |

Contents

| | | |
|----------|--|-----------|
| 1 | Global Trigger System overview | 8 |
| 2 | Firmware overview | 8 |
| 2.1 | Firmware version | 9 |
| 2.2 | Directory structure of Global Trigger firmware | 9 |
| 2.2.1 | Implementation in firmware | 9 |
| 2.2.1.1 | Package: lhc_data_pkg | 11 |
| 2.2.2 | Simulation and build of firmware | 12 |
| 2.2.3 | Testing firmware | 12 |
| 3 | Framework | 13 |
| 3.1 | Implementation in firmware | 14 |
| 3.2 | Configuration of optical connections | 16 |
| 3.3 | Demux Lane Data | 16 |
| 3.4 | Lane Mapping Process | 16 |
| 3.4.1 | Implementation | 16 |
| 3.5 | SIM and SPY Memory | 16 |
| 3.5.1 | Implementation | 16 |
| 3.5.1.1 | SPY Trigger | 18 |
| 3.5.1.2 | SIM/SPY memory | 18 |
| 3.5.1.3 | SPY memory II | 20 |
| 3.5.1.4 | SPY memory III | 20 |
| 3.5.2 | Interface Specification | 22 |
| 3.6 | Timer Counter Manager | 22 |
| 3.6.1 | Counter Overview | 23 |
| 3.6.2 | Bunch Crossing Number and counters derived from it | 23 |
| 3.6.3 | Special counter: bx_nr_d_fdl | 23 |
| 3.6.4 | Counters derived from l1a | 24 |
| 3.6.5 | Errors | 24 |
| 3.6.6 | SW-Registers | 24 |
| 3.7 | Software Reset | 29 |

| | | |
|----------|--|-----------|
| 4 | Global Trigger Logic | 30 |
| 4.1 | μ GTL Interface | 30 |
| 4.2 | Definition of optical interfaces | 31 |
| 4.2.1 | Calo-Layer2 optical interfaces | 31 |
| 4.2.2 | Global Muon Trigger optical interfaces | 32 |
| 4.3 | Implementation in firmware | 33 |
| 4.3.1 | Top-of-hierarchy module | 33 |
| 4.4 | μ GTL structure | 36 |
| 4.4.1 | Data $\pm 2bx$ | 36 |
| 4.4.2 | Definitions of Calorimeter data | 37 |
| 4.4.3 | Definitions of Energy sum quantities data | 40 |
| 4.4.4 | Definitions of Muon data | 42 |
| 4.4.5 | Calculation of object cuts | 45 |
| 4.4.5.1 | Object cuts | 45 |
| 4.4.6 | Calculation of correlation cuts | 50 |
| 4.4.7 | Calculation of look-up-tables (LUTs) for correlation cuts | 54 |
| 4.4.8 | Combination conditions | 59 |
| 4.4.8.1 | Combination conditions definition | 59 |
| 4.4.9 | Energy sum quantities conditions | 61 |
| 4.4.9.1 | Energy sum quantities conditions module (including Asymmetry conditions) | 61 |
| 4.4.10 | Minimum bias trigger conditions | 63 |
| 4.4.11 | Towercount condition | 63 |
| 4.4.12 | Centrality condition | 63 |
| 4.4.13 | Correlation conditions | 64 |
| 4.4.13.1 | Correlation condition module | 66 |
| 4.4.14 | External Conditions | 69 |
| 4.4.15 | Algorithms logic | 69 |
| 5 | Final Desicion Logic | 70 |
| 5.1 | μ FDL Interface | 70 |
| 5.2 | MP7 Final-OR hardware solution | 71 |
| 5.3 | Data flow | 71 |
| 5.4 | Implementation in firmware | 73 |

| | | |
|----------|----------------------------------|-----------|
| 5.5 | Main parts | 76 |
| 5.5.1 | Registers and memories | 76 |
| 5.5.1.1 | Register map | 77 |
| 5.5.2 | Algo-bx-masks | 85 |
| 5.5.3 | Rate-counters | 85 |
| 5.5.4 | Prescalers | 85 |
| 5.5.5 | Finor-masks | 85 |
| 5.5.6 | Veto-masks | 85 |
| 5.5.7 | Finor | 86 |
| 6 | Readout-Process | 87 |
| 7 | Glossary | 88 |
| 8 | Acronyms | 90 |
| 9 | Appendices | 91 |
| | List of Tables | 94 |
| | List of Figures | 95 |

1 Global Trigger System overview

The Global Trigger System is based on uTCA technology and 10Gbps optical links. A set of 6 MP7 boards (for MP7 documentation see [1], for MP7 firmware see [2]) with FPGAs of the powerful Xilinx Virtex-7 family is available. The Global Trigger firmware is implemented on these FPGAs. Every FPGA contains a part of the VHDL representation of a L1 Menu, the partitioning is done by VHDL Producer tool. The trigger decision of every MP7 board is collected on an AMC502 board to generate the "final OR" signal which triggers the readout of the detector.

2 Firmware overview

The figure 1 shows the architecture of μ GT payload. It consists of framework and the algorithm logic which consists of the following modules:

1. Global Trigger Logic Data Mapping
2. μ GTL
3. μ FDL

The output mux (part of framework) collects data for read-out record which are send via MP7 read-out to AMC13.

The IPBus system allows the control of hardware via a ‘virtual bus’, using a standard IP-over-gigabit-Ethernet network connection.

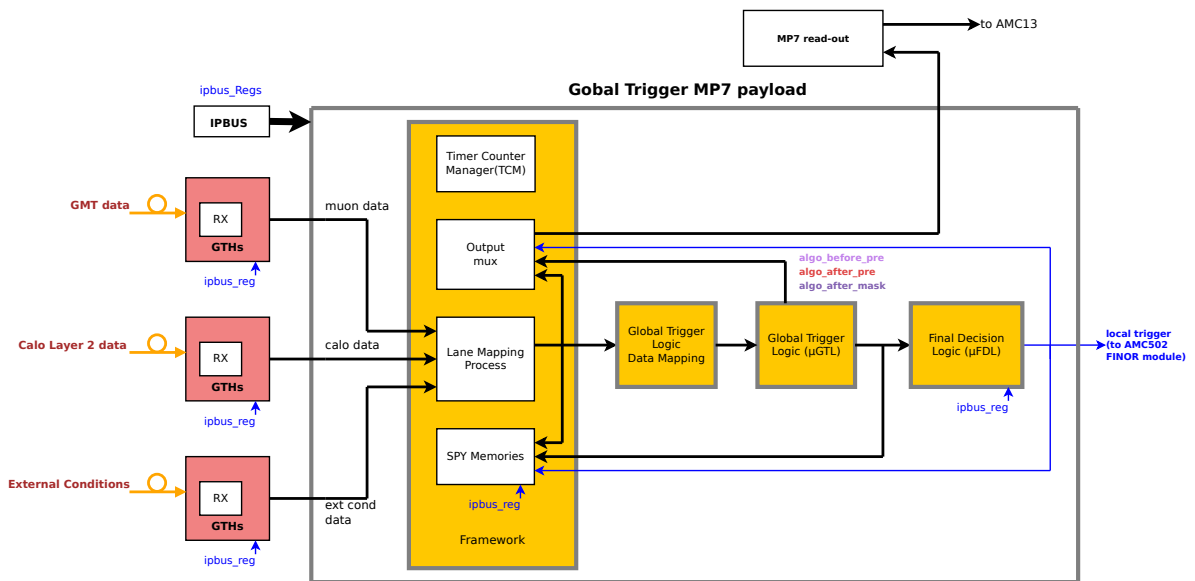


Figure 1: μ GT payload

2.1 Firmware version

This firmware description is valid for version v1.19.3 of Global Trigger firmware, containing the following module versions:

- Framework: v1.2.4
- Global Trigger Logic: v1.17.2
- Final Decision Logic: v1.3.6

2.2 Directory structure of Global Trigger firmware

In Global Trigger repository all files for building firmware are in directory `firmware` with subdirectories for synthesis configuration files (`cfg` and `ucf`), for VHDL source files (`hdl`), for memory files build from IPs (`ngc`) and simulation files (`sim`).

All definitions for VHDL code are in `hdl/packages`, VHDL source files representing Global Trigger firmware are in `hdl/payload` with subdirectories (for `gtl`, `fdl`, `frame` and `ipbus`).

2.2.1 Implementation in firmware

Top-of-hierarchy of VHDL code is `mp7_payload.vhd` (in `hdl/payload`).

Listing 1 contains the entity-declaration of the top-of-hierarchy file (`mp7_payload.vhd`).

Listing 1: Entity declaration of `mp7_payload.vhd`

```
entity mp7_payload is
  port(
    clk: in std_logic; -- ipbus signals
    rst: in std_logic;
    ipb_in: in ipb_wbus;
    ipb_out: out ipb_rbus;
    clk_payload : in  std_logic_vector(2 downto 0);
    rst_payload : in  std_logic_vector(2 downto 0);
    clk_p: in std_logic; -- data clock
    rst_loc: in std_logic_vector(N_REGION - 1 downto 0);
    clken_loc: in std_logic_vector(N_REGION - 1 downto 0);
    ctrs: in ttc_stuff_array;
    l1a: in std_logic; -- L1A input
    bc0: out std_logic;
    d: in ldata(4 * N_REGION - 1 downto 0); -- data in
    q: out ldata(4 * N_REGION - 1 downto 0); -- data out
    gpio: out std_logic_vector(29 downto 0); -- IO to mezzanine connector
    gpio_en: out std_logic_vector(29 downto 0) -- IO to mezzanine connector (
      three-state enables)
  );
end mp7_payload;
```

All the declarations for arrays ('type'), parameters ('constant') and look-up-tables ('constant') used in modules are available in `gtl_pkg.vhd` package-file.

Table 2: Explanation of Listing [1](#)

| Item | Explanation |
|-------------|---|
| clk | IPBus clock input. |
| rst | IPBus reset input. |
| ipb_in | IPBus data input. |
| ipb_out | IPBus data output. |
| clk_payload | clock inputs [clk_payload(0)=lhc_clock]. |
| rst_payload | reset inputs. |
| clk_p | clock 240MHz. |
| rst_loc | not used. |
| clken_loc | not used. |
| ctrs | TTC signals input. |
| l1a | L1A signal input. |
| bc0 | bunch counter reset output. |
| d | data input (from optical links). |
| q | data output (to optical links). |
| gpio | signal outputs to mezzanine board. |
| gpio_en | enable (signal) outputs to mezzanine board. |

2.2.1.1 Package: `lhc_data_pkg`

The VHDL record `lhc_data_t` (shown in Listing 2) is used as a container for all object streams processed by the system. It is declared in the VHDL package `lhc_data_pkg`. For debugging and simulation purposes a second package (`lhc_data_debug_util_pkg`) is created which contains functions to convert the `lhc_data_t` to a hexadecimal string representation and vice versa. The testbench of the design uses this functions to load the contents of the SIM memory from a file.

Listing 2: `lhc_data_t` record specification

```
type lhc_data_t is record
    muon : muon_array_t;
    eg : eg_array_t;
    tau : tau_array_t;
    jet : jet_array_t;
    ett : std_logic_vector(ETT_DATA_WIDTH-1 downto 0);
    ht : std_logic_vector(HT_DATA_WIDTH-1 downto 0);
    etm : std_logic_vector(ETM_DATA_WIDTH-1 downto 0);
    htm : std_logic_vector(HTM_DATA_WIDTH-1 downto 0);
    etmhf : std_logic_vector(ETMHF_DATA_WIDTH-1 downto 0);
    htmhf : std_logic_vector(HTMHF_DATA_WIDTH-1 downto 0);
    link_11_fr_0_data : std_logic_vector(LINK_11_FR_0_WIDTH-1 downto
        0);
    link_11_fr_1_data : std_logic_vector(LINK_11_FR_1_WIDTH-1 downto
        0);
    link_11_fr_2_data : std_logic_vector(LINK_11_FR_2_WIDTH-1 downto
        0);
    link_11_fr_3_data : std_logic_vector(LINK_11_FR_3_WIDTH-1 downto
        0);
    link_11_fr_4_data : std_logic_vector(LINK_11_FR_4_WIDTH-1 downto
        0);
    link_11_fr_5_data : std_logic_vector(LINK_11_FR_5_WIDTH-1 downto
        0);
    external_conditions : std_logic_vector(
        EXTERNAL_CONDITIONS_DATA_WIDTH-1 downto 0);
end record;
```

2.2.2 Simulation and build of firmware

In document [README.md](#) one can find instructions for setting up simulation and build environments. For simulating and building of firmware access rights to GitLab (MP7 firmware) are mandatory.

2.2.3 Testing firmware

Testing of firmware in hardware at CMS P5 is done with script "multiboard_function_test" ("tdf run multiboard_function_test -h"). Therefore a XML file of the L1Menu and a test vector file must be available at the crate. The firmware of the L1Menu which should be tested must be loaded into the 6 MP7 boards before testing ("tdf run uploadfw_gt -h"). For checking crate status execute "tdf run crate_status".

This testing is restricted to persons with access to uGT crates at P5.

3 Framework

This description is for version v1.2.4 of Framework.

Remark:

with frame v1.2.3 "Delay Manager" (dm.vhd) and "Data Source Multiplexer" (dsmux.vhd) are removed because these features were never used in production system, only for tests. Simmem data not useable anymore, because of removed dsmux. The reason of removing is to get more available resources.

Figure 2 shows the basic components of Framework together with Readout-Process.

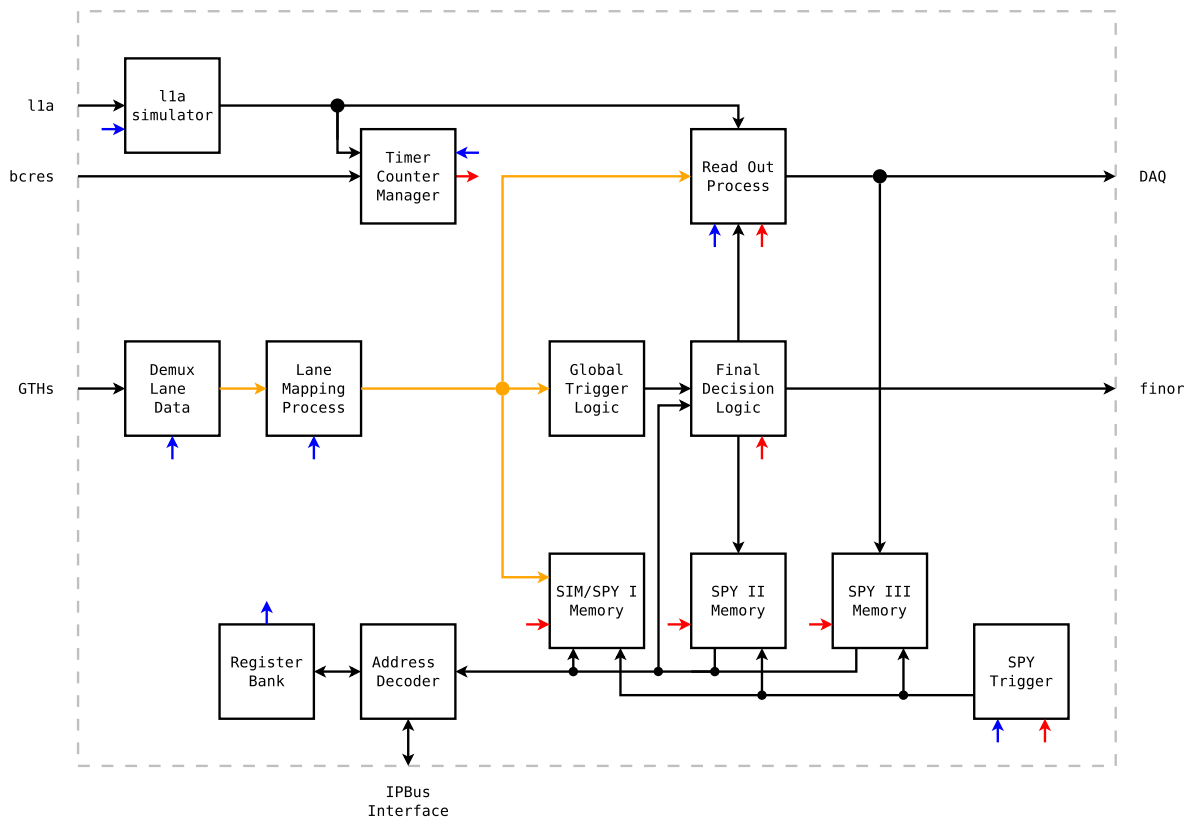


Figure 2: System architecture overview

The central data type of Framework is shown in Listing 2 (see Section 2.2.1.1 for details). In the current configuration it comprises 2304 bits (288 Bytes). Data from the GTH interfaces is demultiplexed (from 240 MHz clock domain to LHC clock domain, see Demux Lane Data 3.3) and mapped to this data type in the LMP (Lane Mapping Process). It is also used as input and output type for the SIM/SPY I memory.

3.1 Implementation in firmware

Listing 3 contains the entity-declaration of the `frame.vhd`.

Listing 3: Entity declaration of `frame.vhd`

```
entity frame is
  generic(
    NR_LANES : positive
  );
  port(
    ipb_clk : in std_logic;
    ipb_rst : in std_logic;
    ipb_in : in ipb_wbus;
    ipb_out : out ipb_rbus;
    ctrs : in ttc_stuff_array; --mp7 ttc ctrs
    clk240 : in std_logic;
    lhc_clk : in std_logic;
    lhc_rst_o : out std_logic;
    bc0 : in std_logic;
    ec0 : in std_logic;
    oc0 : in std_logic;
    start : in std_logic;
    lla : in std_logic;
    bcrs_d : out std_logic;
    bcrs_d_FDL : out std_logic;
    start_lumisection : out std_logic;
    lane_data_in : in ldata(NR_LANES-1 downto 0);
    lane_data_out : out ldata(NR_LANES-1 downto 0);
    lhc_data_2_gtl_o : out lhc_data_t;
    prescale_factor_set_index_rop : in std_logic_vector(7 downto 0);
    algo_after_gtLogic_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_bxomask_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_prescaler_rop : in std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    local_finor_rop : in std_logic;
    local_veto_rop : in std_logic;
    finor_rop : in std_logic;
    local_finor_with_veto_2_spy2 : in std_logic
  );
end frame;
```

Table 3: Explanation of Listing 3

| Item | Explanation |
|------------------------------|---|
| NR_LANES | number of used optical links. |
| ipb_clk | IPBus clock input. |
| ipb_rst | IPBus reset input. |
| ipb_in | IPBus data input. |
| ipb_out | IPBus data output. |
| ctrs | TTC control signals input. |
| clk240 | clock input 240 MHz. |
| lhc_clk | clock input (LHC clock). |
| lhc_rst_o | reset output. |
| bc0 | TTC BGo bunch counter reset input. |
| ec0 | TTC BGo event counter reset input. |
| oc0 | TTC BGo orbit counter reset input. |
| start | TTC BGo start input. |
| lla | L1 access signal input. |
| bcrs_d | delayed bunch counter reset output. |
| bcrs_d_FDL | delayed bunch counter reset output fot FDL. |
| start_lumisection | begin of lumisection output. |
| lane_data_in | data from GTHs (optical links) input (240MHz domain). |
| lane_data_out | data to GTHs (optical links) output (240MHz domain). |
| lhc_data_2_gtl_o | data to GTL output (40MHz domain). |
| prescale_factor_set_in | prescale factor set data input. |
| algo_after_gtLogic_rop | algos after GTL input. |
| algo_after_bxomask_rop | algos after BX mask input. |
| algo_after_prescaler_rop | algos after prescaler input. |
| local_finor_rop | local FINOR input. |
| local_veto_rop | local VETO input. |
| finor_rop | FINOR input. |
| local_finor_with_veto_2_spy2 | local FINOR with VETO to spy mem input. |

3.2 Configuration of optical connections

The configuration of the optical connections to Calo-Layer2 is (currently) done as described in Table 4, where frame means the 32 bits data (240 MHz) within a LHC clock period.

3.3 Demux Lane Data

Data from GTH interfaces is in the 240 MHz clock domain. The demultiplexing to the LHC clock domain (about 40 MHz) is done in `demux_lane_data.vhd`, which is instantiated in `frame.vhd` as often as lanes are used (currently 16 lanes are used).

3.4 Lane Mapping Process

In the Lane Mapping Process module data from the lanes are mapped to objects structure defined in `lhc_data_pkg.vhd`.

3.4.1 Implementation

Currently lane mapping is "fixed" in `lmp.vhd` module, see Table 5 (energy sum quantities ¹: including minimum bias trigger bits, towercounts, asymmetry and centrality bits).

3.5 SIM and SPY Memory

Remark:

with frame v1.2.3 Simmem data not useable anymore, because of removed "Data Source Multiplexer". The reason of removing "Data Source Multiplexer" is to get more available resources.

Figure 3 shows the SIM/SPY memory subsystem of Framework. It is used to calibrate the system, i.e. to record results of the GTL/FDL and output packages of the ROP.

3.5.1 Implementation

The memory subsystem consists of four main parts, which will be discussed in more detail in the following sections

- SPY Trigger
- SIM/SPY Memory
- SPY Memory II
- SPY Memory III

Table 4: Configuration of optical connections

| link | frame | | | | | |
|------|---------------------------------------|---------------------------------------|---|---|---|---|
| | 0 | 1 | 2 | 3 | 4 | 5 |
| 0 | reserved | reserved | muon obj. 0 [0..31] | muon obj. 0 [32..63] | muon obj. 1 [0..31] | muon obj. 1 [32..63] |
| 1 | reserved | reserved | muon obj. 2 [0..31] | muon obj. 2 [32..63] | muon obj. 3 [0..31] | muon obj. 3 [32..63] |
| 2 | reserved | reserved | muon obj. 4 [0..31] | muon obj. 4 [32..63] | muon obj. 5 [0..31] | muon obj. 5 [32..63] |
| 3 | reserved | reserved | muon obj. 6 [0..31] | muon obj. 6 [32..63] | muon obj. 7 [0..31] | muon obj. 7 [32..63] |
| 4 | electron/ γ obj. 0 | electron/ γ obj. 1 | electron/ γ obj. 2 | electron/ γ obj. 3 | electron/ γ obj. 4 | electron/ γ obj. 5 |
| 5 | electron/ γ obj. 6 | electron/ γ obj. 7 | electron/ γ obj. 8 | electron/ γ obj. 9 | electron/ γ obj. 10 | electron/ γ obj. 11 |
| 6 | jet obj. 0 | jet obj. 1 | jet obj. 2 | jet obj. 3 | jet obj. 4 | jet obj. 5 |
| 7 | jet obj. 6 | jet obj. 7 | jet obj. 8 | jet obj. 9 | jet obj. 10 | jet obj. 11 |
| 8 | tau obj. 0 | tau obj. 1 | tau obj. 2 | tau obj. 3 | tau obj. 4 | tau obj. 5 |
| 9 | tau obj. 6 | tau obj. 7 | tau obj. 8 | tau obj. 9 | tau obj. 10 | tau obj. 11 |
| 10 | ET ETTEM MBT0HFP | HT TOWER- COUNT MBT0HFM | ET_{miss} ASYMET MBT1HFP | HT_{miss} ASYMHT MBT1HFM | ET_{miss}^{HF} ASYM- ETHF CENT[3:0] | HT_{miss}^{HF} ASYM- HTHF CENT[7:4] |
| 11 | free | free | free | free | free | free |
| 12 | external- conditions [0..31] | external- conditions [32..63] | reserved | reserved | reserved | reserved |
| 13 | external- conditions [64..95] | external- conditions [96..127] | reserved | reserved | reserved | reserved |
| 14 | external- conditions [128..159] | external- conditions [160..191] | reserved | reserved | reserved | reserved |
| 15 | external- conditions [192..223] | external- conditions [224..255] | reserved | reserved | reserved | reserved |

Table 5: Current lane mapping

| lane | objects |
|------|------------------------------------|
| 0 | muon objects 0..1 |
| 1 | muon objects 2..3 |
| 2 | muon objects 4..5 |
| 3 | muon objects 6..7 |
| 4 | electron/ γ objects 0..5 |
| 5 | electron/ γ objects 6..11 |
| 6 | jet object 0..5 |
| 7 | jet object 6..11 |
| 8 | tau object 0..5 |
| 9 | tau object 6..11 |
| 10 | energy sum quantities ¹ |
| 11 | n/a (currently not used) |
| 12 | external-conditions [0..63] |
| 13 | external-conditions [64..127] |
| 14 | external-conditions [128..191] |
| 15 | external-conditions [192..255] |

3.5.1.1 SPY Trigger

The SPY trigger controls the SPY memories and decides when data is recorded. It can be configured and controlled using software registers 3.1 and 3.2 provided by the register bank.

When the SPY trigger receives a *spy12* command (next or once) over the software register interface it asserts the *spy1* and *spy2* signals for the appropriate orbit. This means that the *spy* signals go high with the bunch crossing counter reaching the value zero and stay high until it reaches zero again (overflow). Note that when the SIM memory is being used (indicated by the *simem_in_use_i* input provided by the DSMUX component) the *spy1* output will not be asserted.

When a *spy3* command is received the SPY trigger asserts the *spy3* signal and waits until the *spy3_ack* signal is asserted.

3.5.1.2 SIM/SPY memory

This component combines the SIM memory and the SPY memory I. This optimization is possible because these two memories are never used at the same time. There are basically two use cases for this memory.

- SIM memory: Data is read from the memory and provided to GTL and ROP to test these components.

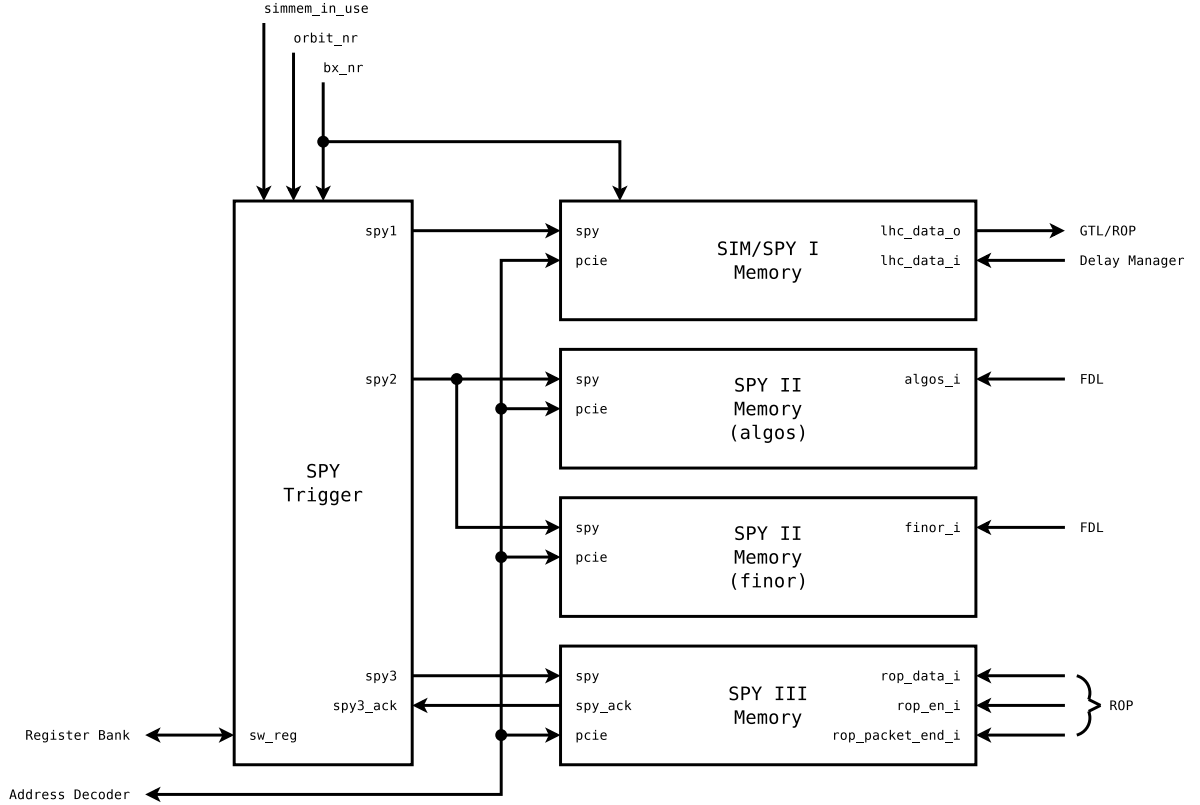


Figure 3: Memory subsystem


- SPY memory: External data is received by the GTX and stored in the memory to check the alignment of the data.

It is very important to guarantee that the spy input signal is not asserted, as long as the memory is used as SIM memory. Note that this functionality is implemented in the SPY trigger component.

The SIM/SPY memory converts the *lhc_data_i* input signal to a `std_logic_vector` using the converter function provided by the `lhc_data_pkg`. This vector is then divided into chunks of 32 bits (the PCIe data width). For each of these chunks a 32 bit true-dual-port memory (2 read ports, 2 write ports, 2 clock domains) is instantiated. Thus, every memory has a read/write port in both clock domain, the 125MHz PCIe clock domain and the 40MHz LHC clock domain, which can be used simultaneously. The PCIe data-in signal (*sw_i.data*) is connected to PCIe-clock domain write port of the memories. A memory select signal is generated from the LSBs of the software address (*sw_i.addr*). The memory select signal also controls the multiplexer on the output of the memories to generate the *sw_o.data* signal.

Depending on whether the SIM/SPY memory is used to provide simulation data or to store/spy data the address on the LHC-clock domain port of the internal memories is adjusted. If data is recorded (SPY) the bunch crossing counter is used as memory address directly. When the memory is read the read latency (two clock cycles) must be taken into account. This is achieved by subtracting 2 from the bunch crossing number before using it

Register 3.1: SPY TRIGGER ORBIT NUMBER REGISTERS

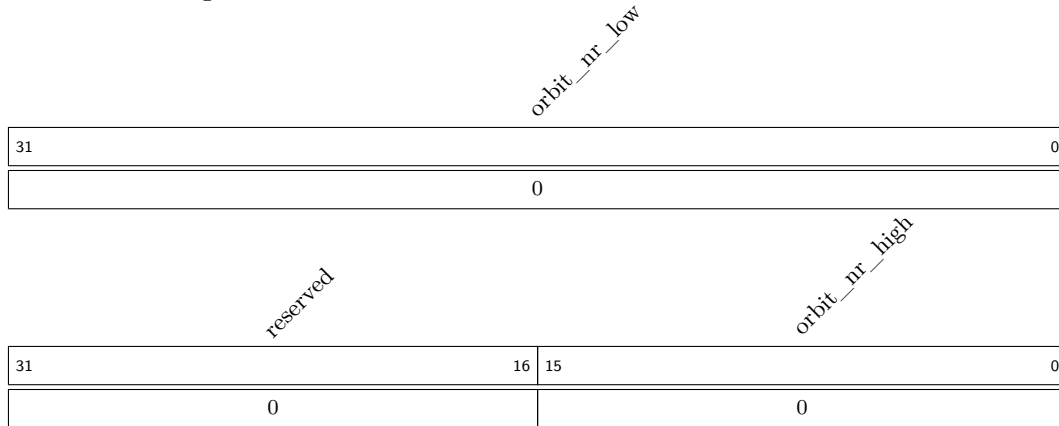

orbit_nr_low The 32 low bits of the 48 bit orbit number, used for the spy once trigger.

orbit_nr_high The 16 high bits of the 48 bit orbit number, used for the spy once trigger.

as address. To generate the *lhc_data_o* signal the LHC-clock domain data out ports of the internal memories are concatenated and converted back to the *lhc_data_t*.

If the *lhc_data_t* is changed (e.g. new objects added) no modifications in the SIM/SPY memory are required. The SIM/SPY memory only depends on the (auto-generated) functions used to convert a *lhc_data_t* signal to *std_logic_vector* and vice versa (see Section 2.2.1.1 for details).

In the current implementation the size every object in the *lhc_data_t* is a multiple of 32 bit. This is also expected by the SIM/SPY memory. If objects with 16 bit sizes are added the SIM/SPY memory must be modified to support this situation (e.g. zero pad the *lhc_data_t*). Furthermore take into account that the PCIe memory bus is 32 bits wide. So 16 bit objects should be added to the end of the *lhc_data_t* (as last entry) to keep software memory access simple.

3.5.1.3 SPY memory II

The SPY memory II is divided into two subcomponents, to store the *algos* and *finor* outputs of the FDL. Both memory can only be read over the SW interface. A write access has no effect. The *algos* memory uses the same architecture as the SIM memory. The *finor* memory uses a true-dual-port memory with asymmetric ports. This memory can be written with a data width of one bit and read with a data width of 32 bit.

3.5.1.4 SPY memory III

The SPY memory III stores the output of the ROP, which is sent to the DAQ. The input data width is configurable to bus widths of 16, 32 or 64 bits. Depending on the input data

Register 3.2: SPY TRIGGER CONFIGURATION REGISTER

| | | | | | | | | | | | | | | | | | | | | | | | |
|--|----|----|----|----|----|----------|--|--|--|--|--|--|--|--|--|---|---|---|---|---|---|---|-------|
| <div>spy12_bsy spy3_bsy spy12_rdy spy3_rdy spy12_err</div> | | | | | | reserved | | | | | | | | | | | <div>clr_spy12_err clr_spy3_rdy clr_spy12_rdy spy12_next spy12_once</div> | | | | | | |
| 31 | 30 | 29 | 28 | 27 | 26 | | | | | | | | | | | | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Reset |

- spy12_once** Triggers the recording of the selected orbit to SPY memories I and II, when written with 1.
- spy12_next** Triggers the recording of the next whole orbit to SPY memories I and II, when written with 1.
- spy3** Triggers the recording of the next package that will be sent by the ROP to SPY memory III, when written with 1.
- clr_spy12_rdy** Clears the ready flag of the SPY trigger for SPY memories I and II, when written with 1.
- clr_spy3_rdy** Clears the ready flag of the SPY trigger for SPY memory III, when written with 1.
- clr_spy12_err** Clears the error flag, when written with 1.
- spy12_bsy** Indicates that the SPY trigger for SPY memories I and II is busy.
- spy3_bsy** Indicates that the SPY trigger for SPY memory III is busy.
- spy12_rdy** Indicates that one orbit has been recorded in SPY memories I and II and that the SPY trigger is ready for new commands.
- spy3_rdy** Indicates that packet has been recorded in SPY memory III and that the SPY trigger is ready for new commands.
- spy12_err** Indicates an error condition (Set only when the selected orbit number for the spy once trigger lies in the past and can therefore not be recorded).

width the memory uses different architectures.

- 16 Bit
A true-dual-port memory with asymmetric ports (16 and 32 bits) is used.
- 32 Bit
A true-dual-port memory with 32 Bit data width is used.
- 64 Bit
Two true-dual-port memories with 32 Bit data width are used.

3.5.2 Interface Specification

Listing 4: SPY trigger interface specification

```
entity spytrig is
  port
  (
    lhc_clk      : in  std_logic;
    lhc_rst      : in  std_logic;
    orbit_nr     : in  orbit_nr_t;
    bx_nr        : in  bx_nr_t;
    sw_reg_i     : in  sw_reg_spytrigger_in_t;
    sw_reg_o     : out sw_reg_spytrigger_out_t;

    spy1_o       : out std_logic;
    spy2_o       : out std_logic;
    spy3_o       : out std_logic;
    spy3_ack_i   : in  std_logic;

    simmem_in_use_i : in std_logic
  );
end;
```

3.6 Timer Counter Manager

The Timer Counter Manager (TCM) provides different counters, listed in table 6 and a set of registers.

3.6.1 Counter Overview

Table 6: Counters of Timer Counter Manager

| Counter | range | increase condition | reset condition | Comments |
|-------------------|------------------|--------------------------------|---------------------------|--------------|
| bx_nr | 0to3563 | rising_edge(lhc_clk) | overflow | |
| event_nr | 0to $2^{32} - 1$ | lla=1 and rising_edge(lhc_clk) | BGOS: event counter reset | |
| trigger_nr | 0to $2^{48} - 1$ | lla=1 and rising_edge(lhc_clk) | BGOS: start run | |
| orbit_nr | 0to $2^{48} - 1$ | overflow of bx_nr | BGOS: orbit counter reset | |
| luminosity_seg_nr | 0to $2^{32} - 1$ | rising_edge(orbit_nr(18)) | BGOS: orbit counter reset | |
| start_lumisection | 0to1 | luminosity_seg_nr increases | after 25ns | '1' for 25ns |
| bx_nr_d_fdl | 0to3563 | rising_edge(lhc_clk) | overflow | |

3.6.2 Bunch Crossing Number and counters derived from it

All counters except for event_nr and the trigger_nr (which are trivial because they are increased with lla) are dependent on the bunch crossing counter bx_nr as stated in table 6. The bx_nr is zero at startup, then waits for the first bcrs_d (bunch crossing reset delayed) and starts counting as depicted in figure 4. It's maximal value is 3563 (0xdeb), then it automatically overflows and starts at zero again (see figure 5). Exactly when bx_nr = 0, bcrs_d has to be asserted. Otherwise the counter is out of synchronization. If this happens, the software register err_det is set and the counter waits for the next bcrs_d to synchronize again. Note that the value of the counter is invalid until it has synchronized again.

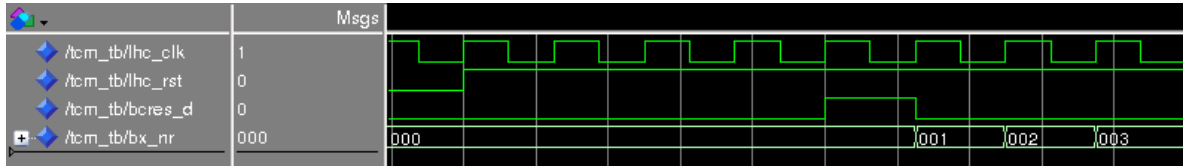


Figure 4: start of the bunch crossing number with the first bcrs_d

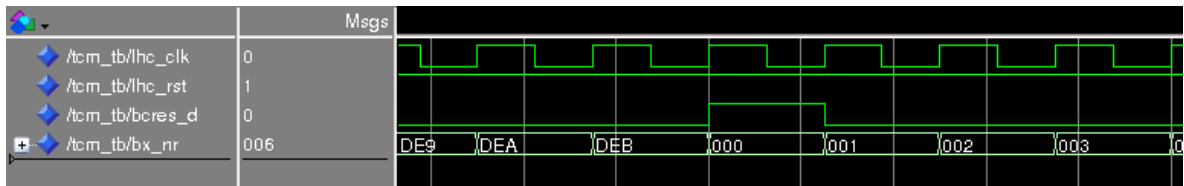


Figure 5: normal operation of the bunch crossing number

3.6.3 Special counter: bx_nr_d_fdl

The bx_nr_d_fdl is derived from bcrs_d_fdl in the same manner as bx_nr is derived from bcrs_d. bx_nr_d_fdl will automatically resync if the logic described in subsection 3.6.5 detects a synchronization error for bx_nr.

3.6.4 Counters derived from l1a

The counters `event_nr` and `trigger_nr` are increased with `l1a`, i.e. they are increased twice if `l1a` is high for 2 clock cycles, etc. They differ only in their value range and the condition that resets the counters, see table 6.

3.6.5 Errors

As stated above, `bcres_d` has to be asserted exactly when `bx_nr = 0`, otherwise the counter is out of sync. Then the software register `err_det` is set as depicted in figure 6. `err_det` can be reset via the software event register `err_det_reset_event` as depicted in figure 7. Furthermore `err_det` is set if `bgos = Resync-0x1` and the counter value is not 3563.

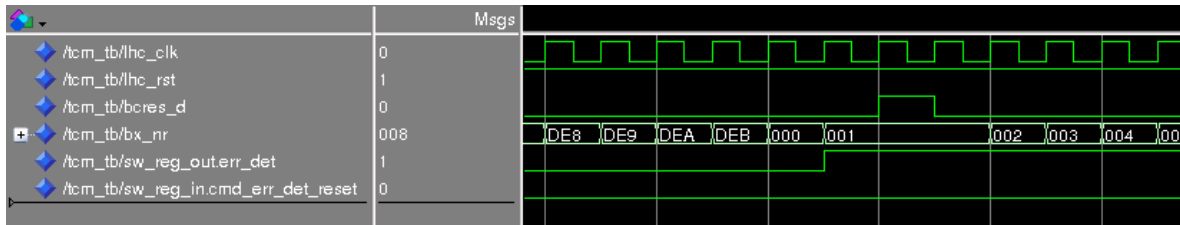


Figure 6: set of the software register `err_det` when `bc_res_d` is not asserted correctly

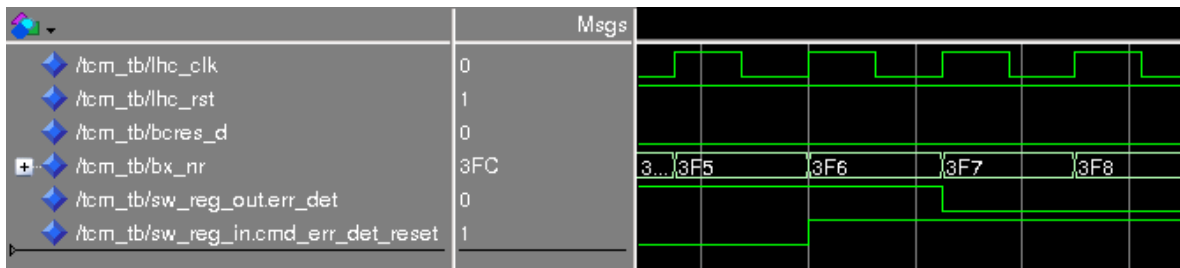


Figure 7: reset of the software register `err_det` when `err_det_reset_event` toggles

The TCM implements two additional counters (`bx_nr_chk` and `bx_nr_max`) for debugging purposes. These counters are not visible by any other module but readable via software. `bx_nr_chk` is a 32bit Counter that increases with every LHC clock cycle and resets with `bcres_d`. `bx_r_max` holds the highest value `bx_nr_chk` ever reached (should be 3563 if the link is aligned).

3.6.6 SW-Registers

All counters except for the `start_lumisection` described in table 6 can be read by software via the following sw registers:

Register 3.3: TCM BUNCH CROSSING NUMBER REGISTER

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| <i>reserved</i> | | | | | | | | | | | | | | | | <i>bx_nr</i> | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | | | | | |
| 12 | | | | | | | | | | | | | | | | 11 | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | | | | | |

Register 3.4: TCM EVENT NUMBER REGISTER

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| <i>event_nr</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Register 3.5: TCM TRIGGER NUMBER REGISTERS


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| <i>trigger_nr_l</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|---------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| <i>reserved</i> | | | | | | | | | | | | | | | | <i>trigger_nr_h</i> | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | 15 | | | | | | | | | | | | | | | |
| 0 | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | | | | | |

trigger_nr_l The 32 low bits of the 48 bit trigger number.

trigger_nr_h The 16 high bits of the 48 bit trigger number.


Register 3.6: TCM ORBIT NUMBER REGISTERS

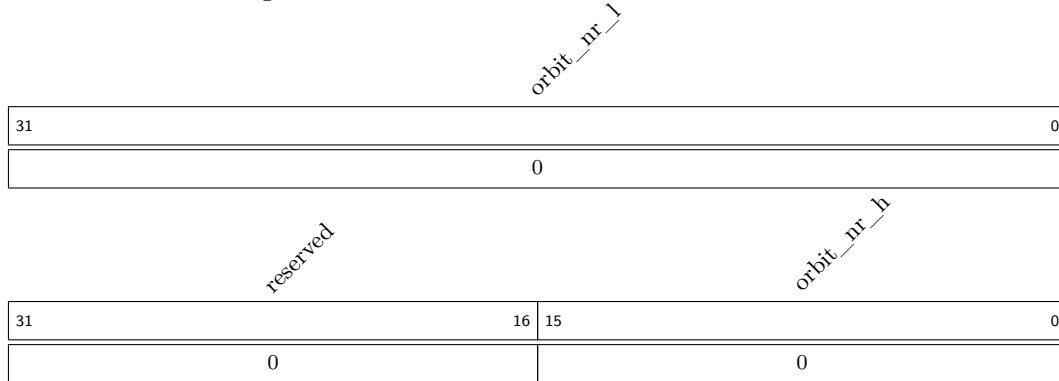


orbit_nr_l The 32 low bits of the 48 bit orbit number.

orbit_nr_h The 16 high bits of the 48 bit orbit number.


Register 3.7: TCM LUMINOSITY SEGMENT NUMBER REGISTER

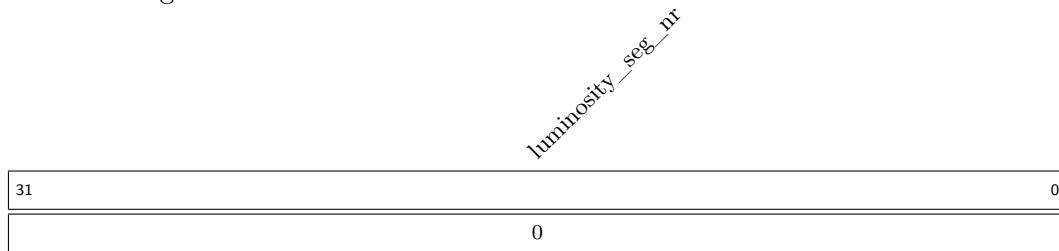

Register 3.8: TCM BUNCH CROSSING NUMBER FDL REGISTER

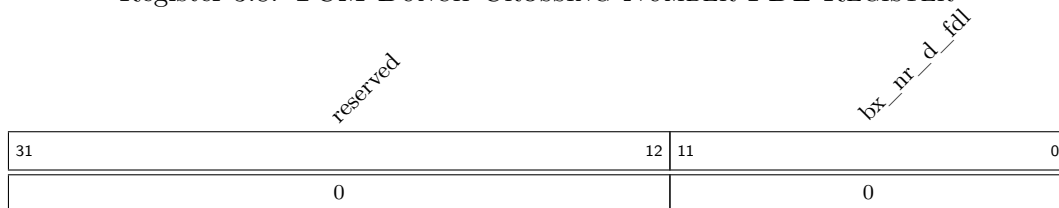

Register 3.9: TCM BUNCH CROSSING NUMBER CHECK REGISTER

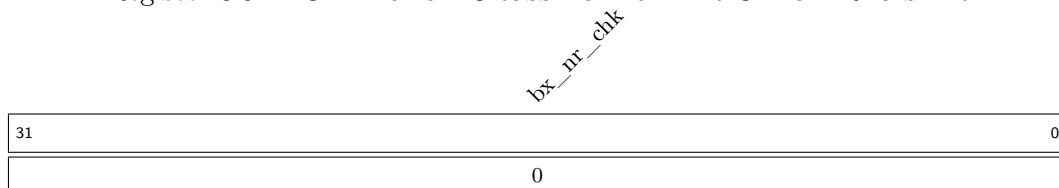

Register 3.10: TCM BUNCH CROSSING NUMBER MAX REGISTER

| | | | |
|----|--|------------------|---|
| | | <i>bx_nr_max</i> | |
| | | | |
| 31 | | | 0 |
| | | 0 | |

Some additional control register can be used to check and reset `err_det`, disable the check of `bres_d` and `bres_d_fdl` (`bx_nr` and `bx_nr_d_fdl` automatically reset when they overflow if `cmd_ign_bres` is set, `bres_d` is ignored) and simulate the `bgos` signal. To do this, a value of the orbit signal has to be written to sw-register `bgos`. The value of the input signal `bgos` is replaced by the value of the sw-register for exactly one clock cycle, when "1" is written to the event register `bgos_event`.

Register 3.11: TCM CMD_IGN_BCRES

| | | | | | |
|----|--|-----------------|---|---------------------|-------|
| | | <i>reserved</i> | | <i>cmd_ign_bres</i> | |
| | | | | | |
| 31 | | | 1 | 0 | |
| | | 0 | | 0 | Reset |

cmd_ign_bres `bres` is ignored (not checked) when this is set.

Register 3.12: TCM ERR_DET

| | | | | | |
|----|--|-----------------|---|----------------|-------|
| | | <i>reserved</i> | | <i>err_det</i> | |
| | | | | | |
| 31 | | | 1 | 0 | |
| | | 0 | | 0 | Reset |

err_det Set when out of synchronization.

Register 3.13: TCM ERR_DET_RESET_EVENT

| | | | |
|----|--|---------------------|-------|
| 31 | | err_det_reset_event | |
| | | | |
| 0 | | 1 | 0 |
| 0 | | 0 | Reset |

err_det_reset_event Event register: resets err_det.

Register 3.14: TCM BGOS

| | | | |
|-------|--|------|---|
| 34 | | bgos | |
| | | | |
| 0 | | 4 | 3 |
| 0 | | 0 | 0 |
| Reset | | | |

bgos For simulation of the bgos signal.

Register 3.15: TCM BGOS_EVENT

| | | | |
|----|--|------------|-------|
| 31 | | bgos_event | |
| | | | |
| 0 | | 1 | 0 |
| 0 | | 0 | Reset |

bgos_event Event register: replaces the input signal bgos by the sw-register bgos for exactly one clock cycle.

Register 3.16: TCM LUMINOSITY_SEG_PERIOD_MSK

| | | | | | | | | |
|----|---|---|---|---|---|---|----------------------------|-------|
| | | | | | | | luminosity_seg_period_mask | |
| | | | | | | | | |
| 31 | | | | | | | 0 | Reset |
| 0 | x | 4 | 0 | 0 | 0 | 0 | 0 | |

luminosity_seg_period_mask luminosity_seg_nr is increased when the or-bit_nr mod lum_seg_period_mask = 0.

3.7 Software Reset

The software reset module (sw_reset) provides the possiblity for a software reset via the software event register sw_reset_event.

Register 3.17: SOFTWARE RESET REGISTER

| | | | | | | | | | |
|----|--|--|--|----------------|---|---|-------|--|--|
| | | | | sw_reset_event | | | | | |
| | | | | | | | | | |
| 31 | | | | | 1 | 0 | Reset | | |
| 0 | | | | | | 0 | | | |

sw_reset_event Event register: Generates a reset signal for exactly one clock cycle.

4 Global Trigger Logic

This description is for version v1.17.2 of Global Trigger Logic.

The Global Trigger Logic (μ GTL) firmware contains conditions and algorithms for trigger decision (see Figure 8).

Definitions are based on document [5].



Figure 8: μ GTL firmware

4.1 μ GTL Interface

Inputs:

- Calo-Layer2 data
 - Electron/ γ objects
 - Jet objects
 - Tau objects
 - Energy summary information:
 - * Total Et (ET)
 - * total Et from ECAL only (ETTEM)
 - * total calibrated Et in jets (HT)
 - * missing Et (ET_{miss})
 - * missing Et including HF (ET_{miss}^{HF})
 - * missing Ht objects (HT_{miss})
 - * missing Ht including HF (HT_{miss}^{HF})
 - * "Asymmetry" information (ASYMET, ASYMHT, ASYMETHF, ASYMHTEF)
 - Minimum bias HF bits (included in energy summary information data structure)

- Towercount bits (number of firing HCAL towers, included in energy summary information data structure)
 - "Centrality" bits
- Global Muon Trigger data
- External conditions

Outputs:

- Algorithms

4.2 Definition of optical interfaces

Remark:

All definitions for scales in the following chapters are from a CMS Detector Note: "Scales for inputs to μ GT" (see [5]).

4.2.1 Calo-Layer2 optical interfaces

The data structure of an electron/ γ object (bits 27..31 are not defined yet, reserved for quality, ...):



The data structure of a jet object (bits 30..31 are spare bits):




D = DISP bit, qu = quality flags, sp = spare bits.

The data structure of a tau object (bits 27..31 are not defined yet, reserved for quality, ...):



The data structure of "total Et" (ET) quantity [including "total Et from ECAL only" (ET-TEM) and "minimum bias HF+ threshold 0" bits]:



The data structure of "total calibrated Et in jets" (HT) quantity [including "towercount" and "minimum bias HF- threshold 0" bits]:

| | | | | | | | |
|----------------|----|--------------|----|-------------------|----|----------------------|---|
| 31 | 28 | 27 | 25 | 24 | 12 | 11 | 0 |
| <i>MBT0HFM</i> | | <i>spare</i> | | <i>TOWERCOUNT</i> | | <i>E_T</i> | |

The data structure of "missing Et" (ET_{miss}) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits]:

| | | | | | | | |
|----------------|----|---------------|----|-----------|----|----------------------|---|
| 31 | 28 | 27 | 20 | 19 | 12 | 11 | 0 |
| <i>MBT1HFP</i> | | <i>ASYMET</i> | | φ | | <i>E_T</i> | |

The data structure of "missing Ht" (HT_{miss}) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits]:

| | | | | | | | |
|----------------|----|---------------|----|-----------|----|----------------------|---|
| 31 | 28 | 27 | 20 | 19 | 12 | 11 | 0 |
| <i>MBT1HFM</i> | | <i>ASYMHT</i> | | φ | | <i>E_T</i> | |

The data structure of "missing Et including HF" ($ET_{\text{miss}}^{\text{HF}}$) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)]:

| | | | | | | | |
|------------------|----|-----------------|----|-----------|----|----------------------|---|
| 31 | 28 | 27 | 20 | 19 | 12 | 11 | 0 |
| <i>[CENT3:0]</i> | | <i>ASYMETHF</i> | | φ | | <i>E_T</i> | |

The data structure of "missing Ht including HF" ($HT_{\text{miss}}^{\text{HF}}$) quantity [including "Asymmetry" ASYMHTHF and "Centrality" bits (7:4)]:

| | | | | | | | |
|------------------|----|-----------------|----|-----------|----|----------------------|---|
| 31 | 28 | 27 | 20 | 19 | 12 | 11 | 0 |
| <i>CENT[7:4]</i> | | <i>ASYMHTHF</i> | | φ | | <i>E_T</i> | |

4.2.2 Global Muon Trigger optical interfaces

The data structure of a muon object (64 bits - bit 34 = charge sign, bit 35 = charge valid, bit 61 is a spare bit, bit 63..62 = impact parameter):

| | | | | | | | | | | | | |
|---------------|----|----|------------------------|------|---------|----------------|----|------------|---------------|----|-----|----|
| 63 | 62 | 61 | 60 | 53 | 52 | 43 | 42 | 36 | 35 | 34 | 33 | 32 |
| imp | | s | unconst.p _T | | φ (out) | | | index bits | | ch | iso | |
| | | | | | | | | | | | | |
| 31 | 23 | | | 22 | 19 | | 18 | 10 | | 9 | 0 | |
| η (extrapol.) | | | | qual | | p _T | | | φ (extrapol.) | | | |

ch = charge bits, s = spare bit, imp = impact parameter.

4.3 Implementation in firmware

The firmware of μ GTL consists of two main parts:

- A top-of-hierarchy file (`gtl_module.vhd`), which contains the pipeline for $\pm 2bx$ data, the instantiations of calculators for differences in η and φ , the instantiations of conditions, the instantiations of charge correlation logic of muons and the Algorithms logic for 512 Algorithms, as well as a package file (`gtl_pkg.vhd`) for declarations. Currently 6 AMC (MP7) boards are used to contain Algorithms. A software tool called Trigger Menu Editor (TME) [3] is available to create a L1Menu with up to 512 Algorithms, which are partitioned by VHDL Producer [4] to the 6 MP7 boards. The VHDL Producer for every Trigger Menu creates VHDL snippets files (`algo_index.vhd`, `gtl_module_instances.vhd`, `gtl_module_signals.vhd`, `ugt_constants.vhd`), these snippets are inserted into templates for `gtl_module.vhd` (`gtl_module_tpl.vhd`) and `fdl_pkg.vhd` (`fdl_pkg_tpl.vhd`) during simulation and synthesis (see Figure 9).
- A set of VHDL-files exists for all the modules instantiated in top-of-hierarchy and the modules in the hierarchy. These files, called the "fixed part", are not influenced by VHDL Producer.

The latency of μ GTL is fixed to 5 bunch-crossings, 2 bunch-crossings for the pipeline of $\pm 2bx$ data (for data with $+2bx$ and $+1bx$), 2 bunch-crossings for conditions (fixed), also for the conditions requested in the future, 1 bunch-crossing for the logic of Algorithms (see Figure 10).

4.3.1 Top-of-hierarchy module

The top-of-hierarchy module (`gtl_module.vhd`) contains

- the pipeline for $\pm 2bx$ data
- the instantiations of charge correlation logic of muons (generated by VHDL Producer)
- the instantiations of calculators for differences in η and φ (generated by VHDL Producer)
- the instantiations of conditions (generated by VHDL Producer)
- a boolean logic for Algorithms (generated by VHDL Producer)

Listing 5 contains the entity-declaration of the top-of-hierarchy file (`gtl_module.vhd`).

All the declarations for arrays ('type'), parameters ('constant') and look-up-tables ('constant') used in modules are available in `gtl_pkg.vhd` package-file.

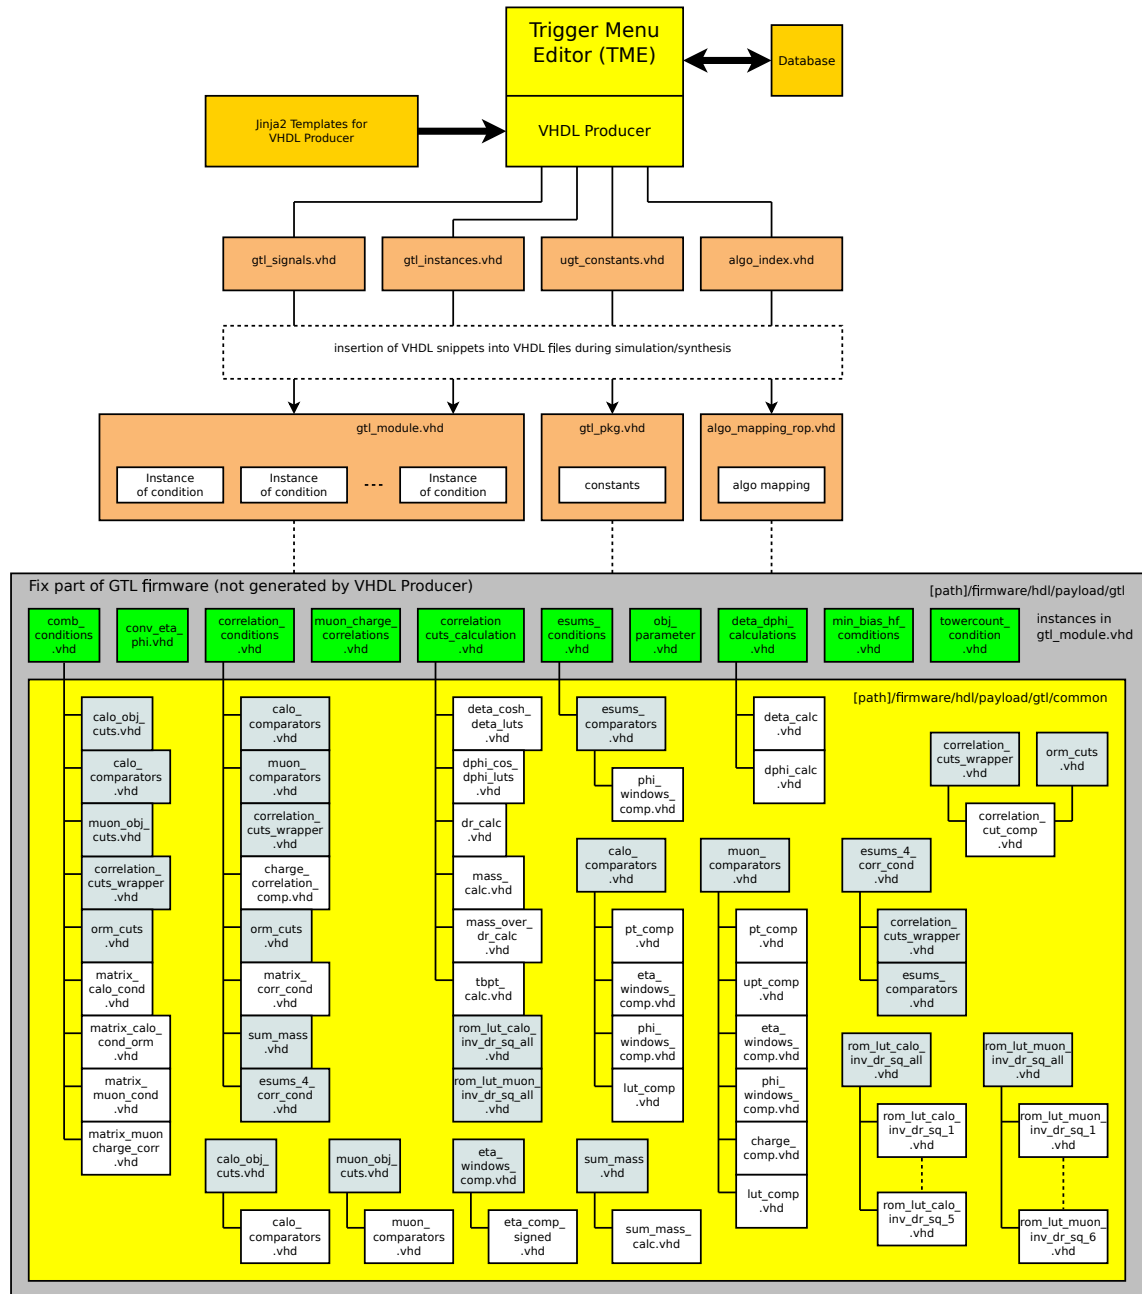


Figure 9: VHDL file generation by VHDL Producer

Table 7: Explanation of Listing 5

| Item | Explanation |
|----------|-------------------------------|
| lhc_clk | clock input (LHC clock). |
| gtl_data | input data ($\pm 2bx$ data). |
| algo_o | algorithms output. |

Listing 5: Entity declaration of gtl_module.vhd

```
entity gtl_module is
  port(
    lhc_clk : in std_logic;
    gtl_data : in gtl_data_record;
    algo_o : out std_logic_vector(NR_ALGOS-1 downto 0));
end gtl_module;
```

4.4 μ GTL structure

4.4.1 Data ± 2 bx

The μ GTL input data flow through a register pipeline of four stages. With those data it is possible to have conditions with objects from different bunch-crossings (within ± 2 bunch-crossings), electron/ γ for Correlation conditions.

See Figure 10 for a scheme of μ GTL pipeline structure. The data "data_p_1bx" and "data_p_2bx" occur 1 respectively 2 bunch-crossings after data for a certain bunch-crossing, therefore we got 2 bunch-crossings of latency from those data. The data "data_m_1bx" and "data_m_2bx" have no influence on latency, because coming before data for a certain bunch-crossing.

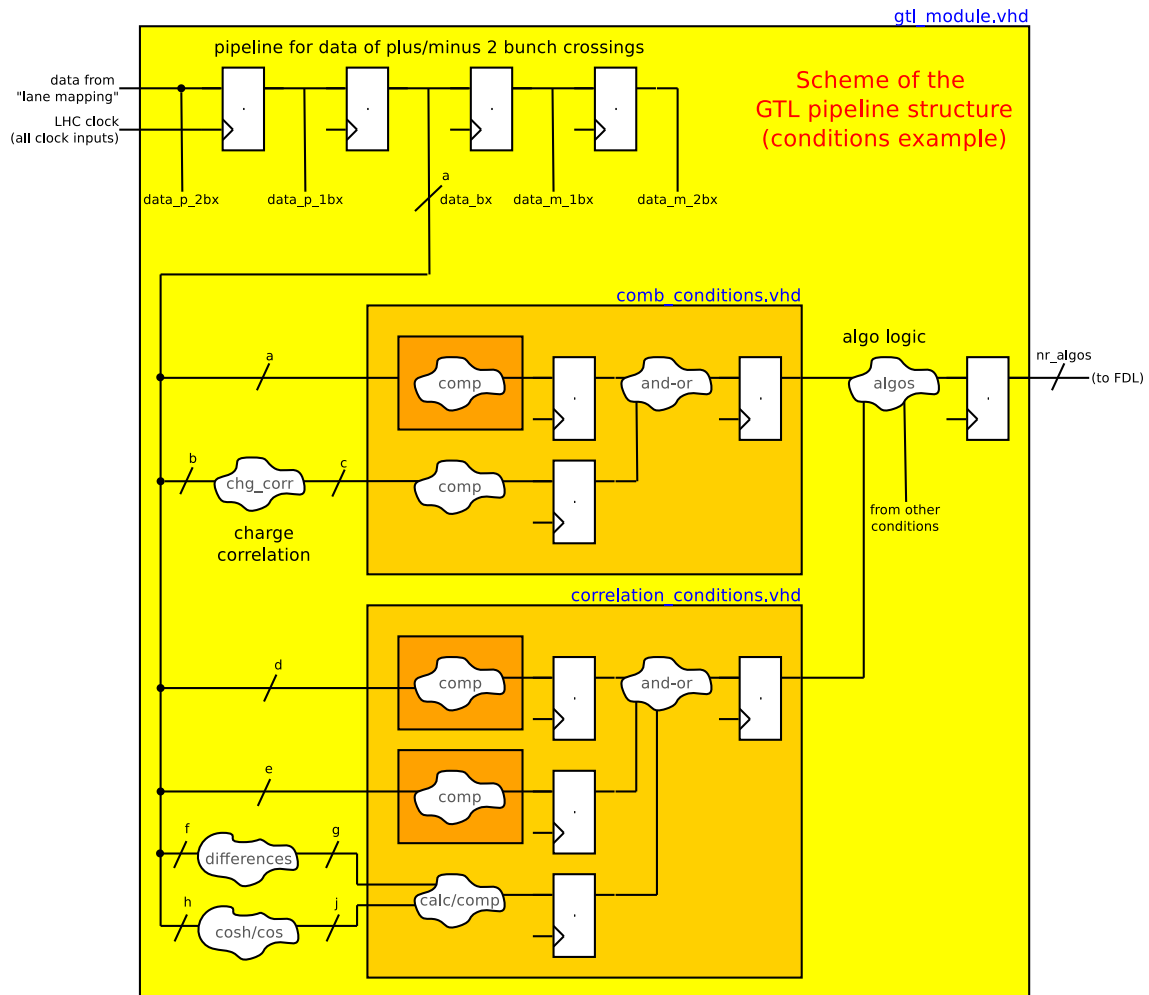


Figure 10: Scheme of μ GTL pipeline structure

4.4.2 Definitions of Calorimeter data

The calorimeter trigger processing identifies **electron/ γ** , **jet** and **tau** objects and **energy sum quantities**.

See also [4.2](#).

electron/ γ :

Twelve objects are passed to the μ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for p_T and for position and isolation - encoded in 32 bits:

- 9 bits p_T , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity (η) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle (φ) position, range = 2π , step $\approx 2\pi/144$ ($\cong 2.5^\circ$), 144 bins (HW index = 0..0x8F), HW index starting at 0° (anti-clockwise)
- 2 bits isolation
- 5 bits spare

jet:

Twelve objects are passed to the μ GT for each event.

For each selected object, the Calo-Layer2 sends parameters: p_T , for position information, a DISP bit and quality information - encoded in 32 bits:

- 11 bits p_T , range = 0..1023 GeV (HW index = 0..0x7FF), step = 0.5, the highest bin will mark an overflow (HW index 0x7FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity (η) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle (φ) position, range = 2π , step $\approx 2\pi/144$ ($\cong 2.5^\circ$), 144 bins (HW index = 0..0x8F), HW index starting at 0° (anti-clockwise)
- 1 DISP bit (will be used to flag a jet as delayed / displaced based on HCAL timing and depth profiles that are indicative of a LLP decay. If this bit is set to 1, then the jet has been tagged as an LLP jet.)
- 2 bits for "quality flags" - currently not used.
- 2 bits spare

tau:

Twelve objects are passed to the μ GT for each event.

For each selected object, the Calo-Layer2 sends parameters for p_T and for position information and isolation - encoded in 32 bits:

- 9 bits p_T , range = 0..255 GeV (HW index = 0..0x1FF), step = 0.5, the highest bin will mark an overflow (HW index 0x1FF): meaning has to be defined
- 8 (7+1 sign) bits pseudo-rapidity (η) position, range = -5.0 to 5.0, step = 0.087/2, linear scale, 230 bins (HW index = 0x8E..0x72)
- 8 bits azimuth angle (φ) position, range = 2π , step $\approx 2\pi/144$ ($\simeq 2.5^\circ$), 144 bins (HW index = 0..0x8F), HW index starting at 0° (anti-clockwise)
- 2 bits isolation
- 5 bits spare

The representation of the 8 bits (called "hardware index [HW index]") in η is expected as Two's Complement notation as shown below.

Table 8: η scale of calorimeter objects

| HW index | η range | η bin |
|----------|--|------------|
| 0x72 | $114 \cdot 0.087/2$ to $115 \cdot 0.087/2$ | 114 |
| ... | ... | ... |
| 0x01 | $0.087/2$ to $2 \cdot 0.087/2$ | 1 |
| 0x00 | 0 to $0.087/2$ | 0 |
| 0xFF | 0 to $-0.087/2$ | -1 |
| 0xFE | $-0.087/2$ to $-2 \cdot 0.087/2$ | -2 |
| ... | ... | ... |
| 0x8E | $-114 \cdot 0.087/2$ to $-115 \cdot 0.087/2$ | -115 |

The representation of the 8 bits in φ is expected as shown in Table 9.

Table 9: φ scale of calorimeter objects

| HW index | φ range | φ range [degrees] | φ bin |
|----------|----------------------------------|---------------------------|---------------|
| 0x00 | 0 to $2\pi/144$ | 0 to 2.5 | 0 |
| 0x01 | $2\pi/144$ to $2 \cdot 2\pi/144$ | 2.5 to 5.0 | 1 |
| ... | ... | ... | ... |
| 0x8F | $143 \cdot 2\pi/144$ to 2π | 357.5 to 360 | 143 |

The representation of the 2 bits for isolation (e/γ and tau) is expected as shown in Table 10.

Table 10: Definition of e/γ and tau isolation bits

| bits [26..25] | definition |
|---------------|--------------|
| 00 | not isolated |
| 01 | isolated |
| 10 | TBD |
| 11 | TBD |

4.4.3 Definitions of Energy sum quantities data

See also [4.2](#).

energy sum quantities:

Consists of following quantities (naming convention see in "Glossary"):

- **ET**
- **HT**
- ET_{miss}
- HT_{miss}
- **ETTEM**
- $\mathbf{ET}_{\text{miss}}^{\text{HF}}$
- $\mathbf{HT}_{\text{miss}}^{\text{HF}}$
- **ASYMET**
- **ASYMHT**
- **ASYMETHF**
- **ASYMHTHF**
- **CENT0**
- ..
- **CENT7**

Calo-Layer2 sends 6 frames (each 32 bits) with Energy sum quantities containing the following information:

- E_{T} , 12 bits, range = 0..2047 GeV (HW index = 0..0xFFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFFF): meaning has to be defined
- azimuth angle (φ) position, 8 bits, range = 2π , step $\approx 2\pi/144$ ($\cong 2.5^\circ$), 144 bins (HW index = 0..0x8F), HW index starting at 0° (anti-clockwise)
- "Towercount", 13 bits, range = 0..8191
- "Minimum bias", 4 bits, range = 0..15
- "Asymmetry", 8 bits, range = 0..255 (used 0..100)
- "Centrality", 8 bits, used as signals

Frame 0: The data structure of "total Et" (ET) quantity [including "total Et from ECAL only" (ETTEM) and "minimum bias HF+ threshold 0" bits].

Frame 1: The data structure of "total calibrated Et in jets" (HT) quantity [including "tower-count" and "minimum bias HF- threshold 0" bits].

Frame 2: The data structure of "missing Et" (ET_{miss}) quantity [including "Asymmetry" ASYMET and "minimum bias HF+ threshold 1" bits].

Frame 3: The data structure of "missing Ht" (HT_{miss}) quantity [including "Asymmetry" ASYMHT and "minimum bias HF- threshold 1" bits].

Frame 4: The data structure of "missing Et including HF" ($ET_{\text{miss}}^{\text{HF}}$) quantity [including "Asymmetry" ASYMETHF and "Centrality" bits (3:0)].

Frame 5: The data structure of "missing Ht including HF" ($HT_{\text{miss}}^{\text{HF}}$) quantity [including "Asymmetry" ASYMHTEHF and "Centrality" bits (7:4)].

4.4.4 Definitions of Muon data

Eight Muon objects are provided by Global Muon Trigger. One Muon object has a 64 bits data structure with parameters for p_T , for unconstrained p_T , for impact parameter, for position, charge, quality and isolation information (see also 4.2.2):

- 10 bits azimuth angle (φ) position, range = 2π , step $\approx 2\pi/576$ ($\approx 0.625^\circ$), 576 bins (HW index = 0..0x23F), HW index starting at 0° (anti-clockwise)
- 9 bits p_T , range = 0..255 GeV (HW index = 0..0xFF), step = 0.5, the highest bin will mark an overflow (HW index 0xFF): meaning has to be defined
- 4 bits quality, 16 types for quality (meaning not defined yet!)
- 9 (8+1 sign) bits pseudo-rapidity (η) position, range = -2.45 to 2.45, step = 0.087/8, linear scale, 451 bins (-225..225, HW index = 0x11F..0x0E1)
- 2 bits isolation, 4 types for isolation (meaning not defined yet!)
- 1 bit charge sign, charge sign = '0' means "positive" charge, charge sign = '1' means "negative" charge
- 1 bit charge valid (= '1' means "valid")
- 7 index bits
- 10 bits azimuth angle (φ) position, raw data
- 8 bits unconstrained p_T , range = 0..255 GeV (HW index = 0..0xFF), step = 1.0, the highest bin will mark an overflow (HW index 0xFF)
- 1 spare bit
- 2 bits impact parameter

The representation of the 9 bits (called "hardware index [HW index]") in η is expected as Two's Complement notation as shown in Table 11.

The central value of the bin 0 ($-0.010875/2$ to $+0.010875/2$) = 0.0, the left edge of the bins will range from $-255 \times 0.010875 - 0.010875/2 = -2.7785625$ to $+255 \times 0.010875 - 0.010875/2 = 2.7676875$. The central value of the bins will range between ± 2.773125 . The physical η range of the muon detectors is about ± 2.45 , so that not all possible η bins will be used.

The representation of the 10 bits in φ is expected as shown in Table 12.

The representation of the 4 bits for quality is expected as shown in Table 13.

The representation of the 2 bits for isolation is expected as shown in Table 15.

The representation of the 2 bits for impact parameter is expected as shown in Table 15.

Table 11: η scale of muon objects

| HW index | η range | η bin |
|----------|--------------------------------------|------------|
| 0x0E1 | $224.5*0.087/8$ to $225.5*0.087/8$ | 225 |
| 0x0E0 | $223.5*0.087/8$ to $224.5*0.087/8$ | 224 |
| ... | ... | ... |
| 0x001 | $0.5*0.087/8$ to $1.5*0.087/8$ | 1 |
| 0x000 | $0.5*-0.087/8$ to $0.5*0.087/8$ | 0 |
| 0x1FF | $0.5*-0.087/8$ to $1.5*-0.087/8$ | -1 |
| 0x1FE | $1.5*-0.087/8$ to $-2.5*0.087/8$ | -2 |
| ... | ... | ... |
| 0x11F | $-224.5*0.087/8$ to $-225.5*0.087/8$ | -225 |

Table 12: φ scale of muon objects

| HW index | φ range | φ range [degrees] | φ bin |
|----------|----------------------------|---------------------------|---------------|
| 0x000 | 0 to $2\pi/576$ | 0 to 0.625 | 0 |
| 0x001 | $2\pi/576$ to $2*2\pi/576$ | 0.625 to 1.250 | 1 |
| ... | ... | ... | ... |
| 0x23F | $575*2\pi/576$ to 2π | 359.375 to 360 | 575 |

Table 13: Definition of muon quality bits

| bits [22..19] | definition |
|---------------|--------------------|
| 0000 | quality "level 0" |
| 0001 | quality "level 1" |
| ... | ... |
| 1110 | quality "level 14" |
| 1111 | quality "level 15" |

Table 14: Definition of muon isolation bits

| bits [33..32] | definition |
|---------------|--------------|
| 00 | not isolated |
| 01 | isolated |
| 10 | TBD |
| 11 | TBD |

Table 15: Definition of muon impact parameter bits

| bits [63..62] | definition |
|---------------|------------|
| 00 | TBD |
| 01 | TBD |
| 10 | TBD |
| 11 | TBD |

4.4.5 Calculation of object cuts

List of object cuts:

- p_T
- η
- φ
- isolation
- DISP
- charge
- quality
- unconstrained p_T
- impact parameter

4.4.5.1 Object cuts

The comparisons for objects cuts are done by:

A comparator between the energy (p_T) and a threshold (`pt_threshold`) with 'mode-selection'. Similar for unconstrained p_T .

The comparison in η is done with five "window"-comparators, so one gets max. five ranges for η . The η value (HW index) has a Two's Complement notation, the comparisons is done signed. Number of windows is given for η .

The comparison in φ is done with two "window"-comparators, so one gets two ranges for φ . The comparisons is done unsigned. Number of windows is given for φ .

There are two cases how the limits of one "window"-comparator could be set (see also Figure 11):

- Upper limit is less than lower limit \Rightarrow φ range between the limits, including the φ bin with value = 0 (HW index).
- Upper limit is greater/equal than lower limit \Rightarrow φ range between the limits, not including the φ bin with value = 0 (HW index).

```
phi_comp_w1 <= '1' when phi_w1_upper_limit < phi_w1_lower_limit and
    (phi <= phi_w1_upper_limit or phi >= phi_w1_lower_limit) else
    '1' when phi_w1_upper_limit >= phi_w1_lower_limit and
    (phi <= phi_w1_upper_limit and phi >= phi_w1_lower_limit)
    else '0';
```

Only one of the required ranges ("windows") must be fulfilled by η and φ values ("or").

The comparisons for isolation, quality and impact parameter are done with LUTs.
The comparison for charge is done with requested charge.
If DISP bit is set to 1, then the jet has been tagged as an LLP jet. A one bit requirement is given for DISP for comparison.

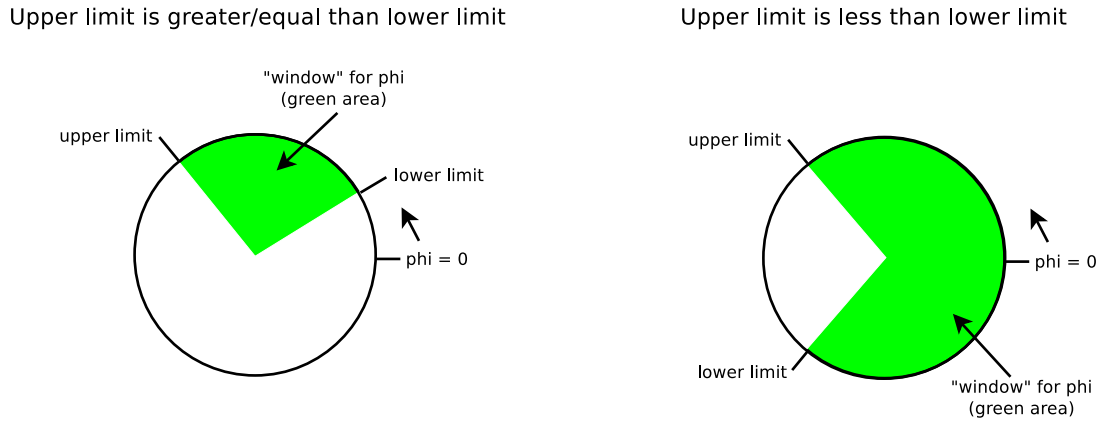


Figure 11: Setting the limits for "window"-comparators for φ

The comparison of isolation (for electron/ γ , tau and muon) is done with a LUT (Table 16). [To ignore quality comparison, all bits in the LUT have to be '1'.]

The comparison of impact parameter is done with LUT (Table 17). [To ignore quality comparison, all bits in the LUT have to be '1'.]

The comparison of quality is done with LUT (Table 18). [To ignore quality comparison, all bits in the LUT have to be '1'.]

Charge valid and charge sign bits must be equal to the requested charge.

Table 16: LUT contents for isolation comparison

| LUT content (4 bits) | isolation (2 bits) | trigger |
|----------------------|----------------------|---|
| X"0" | xx | no trigger |
| X"1" | 00 | trigger on isolation bits = 00 |
| X"2" | 01 | trigger on isolation bits = 01 |
| X"3" | 00 or 01 | trigger on isolation bits = 00 or 01 |
| X"4" | 10 | trigger on isolation bits = 10 |
| X"5" | 00 or 10 | trigger on isolation bits = 00 or 10 |
| X"6" | 01 or 10 | trigger on isolation bits = 01 or 10 |
| X"7" | 00 or 01 or 10 | trigger on isolation bits = 00 or 01 or 10 |
| X"8" | 11 | trigger on isolation bits = 11 |
| X"9" | 00 or 11 | trigger on isolation bits = 00 or 11 |
| X"A" | 01 or 11 | trigger on isolation bits = 01 or 11 |
| X"B" | 00 or 01 or 11 | trigger on isolation bits = 00 or 01 or 11 |
| X"C" | 10 or 11 | trigger on isolation bits = 10 or 11 |
| X"D" | 00 or 10 or 11 | trigger on isolation bits = 00 or 10 or 11 |
| X"E" | 01 or 10 or 11 | trigger on isolation bits = 01 or 10 or 11 |
| X"F" | 00 or 01 or 10 or 11 | trigger on isolation bits = 00 or 01 or 10 or 11 (= "ignore" isolation) |

Table 17: LUT contents for impact parameter comparison

| LUT content (4 bits) | impact parameter (2 bits) | trigger |
|----------------------|---------------------------|---|
| X"0" | xx | no trigger |
| X"1" | 00 | trigger on impact parameter bits = 00 |
| X"2" | 01 | trigger on impact parameter bits = 01 |
| X"3" | 00 or 01 | trigger on impact parameter bits = 00 or 01 |
| X"4" | 10 | trigger on impact parameter bits = 10 |
| X"5" | 00 or 10 | trigger on impact parameter bits = 00 or 10 |
| X"6" | 01 or 10 | trigger on impact parameter bits = 01 or 10 |
| X"7" | 00 or 01 or 10 | trigger on impact parameter bits = 00 or 01 or 10 |
| X"8" | 11 | trigger on impact parameter bits = 11 |
| X"9" | 00 or 11 | trigger on impact parameter bits = 00 or 11 |
| X"A" | 01 or 11 | trigger on impact parameter bits = 01 or 11 |
| X"B" | 00 or 01 or 11 | trigger on impact parameter bits = 00 or 01 or 11 |
| X"C" | 10 or 11 | trigger on impact parameter bits = 10 or 11 |
| X"D" | 00 or 10 or 11 | trigger on impact parameter bits = 00 or 10 or 11 |
| X"E" | 01 or 10 or 11 | trigger on impact parameter bits = 01 or 10 or 11 |
| X"F" | 00 or 01 or 10 or 11 | trigger on impact parameter bits = 00 or 01 or 10 or 11 (= "ignore" impact parameter) |

Table 18: LUT contents for quality comparison of muon objects

| LUT content (16 bits) | quality bits (4 bits) | trigger |
|-----------------------|-----------------------|--|
| X"0000" | xxxx | no trigger |
| X"0001" | 0000 | trigger on quality "level 0" |
| X"0002" | 0001 | trigger on quality "level 1" |
| X"0003" | 0001 or 0000 | trigger on quality "level 1" or "level 0" |
| X"0004" | 0010 | trigger on quality "level 2" |
| ... | ... | ... |
| X"8000" | 1111 | trigger on quality "level 15" |
| X"C000" | 1111 or 1110 | trigger on quality "level 15" or "level 14" |
| ... | ... | ... |
| X"FFFF" | xx | trigger on all quality "levels" (= "ignore") |

4.4.6 Calculation of correlation cuts

The following cuts are used for two objects correlations:

- $\Delta\eta$ (DETA).
- $\Delta\varphi$ (DPHI).
- ΔR (DR).
- charge correlation (only for muon).
- Cuts for mass (MASS) of following mass types:
 - Invariant mass.
 - Invariant mass with unconstrained pt (for muons only).
 - Invariant mass over ΔR .
 - Transverse mass.
- Two-body pt.

There is one mass cut for correlations with three objects:

- Invariant mass for three objects (MASS).

The generation of look-up-tables (LUTs) for calculations of correlation cuts is described in chapter "Calculation of look-up-tables (LUTs) for correlation cuts" (see [4.4.7](#)).

Calculation of $\Delta\eta$

The calculation of $\Delta\eta$ of two objects is done with formula:

$$\Delta\eta = \text{abs}(\eta_1 - \eta_2)$$

where η_1 and η_2 are represented in signed hardware indices.

Calculation of $\Delta\varphi$

The calculation of $\Delta\varphi$ of two objects is done with formula:

$$\Delta\varphi = \text{abs}(\varphi_1 - \varphi_2) \text{ with } (" \varphi \text{ full bin range} " - \Delta\varphi) \text{ when } (\Delta\varphi > " \varphi \text{ half bin range} ").$$

where φ_1 and φ_2 are represented in unsigned hardware indices.

ΔR calculation

The calculation of ΔR of two objects is done with formula:

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of ΔR^2 in VHDL (no square root in VHDL) is done by adding the square of $\Delta\eta$ and $\Delta\varphi$ LUT values.

Invariant mass calculation

The calculation of *invariant mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

The calculation of $\frac{M^2}{2}$ in VHDL (no square root in VHDL) is done by multiplying LUT values of pt1, pt2 and the difference of $\cosh(\Delta\eta)$ and $\cos(\Delta\varphi)$.

Transverse mass calculation

The calculation of *transverse mass of two objects* is done with formula:

$$M = \sqrt{2pt_1pt_2(1 - \cos(\varphi_1 - \varphi_2))}.$$

Calculation similar to "Invariant mass calculation".

Invariant mass over ΔR calculation

The formulas for *invariant mass over ΔR of two objects* are:

$$M = \sqrt{2pt_1pt_2(\cosh(\eta_1 - \eta_2) - \cos(\varphi_1 - \varphi_2))}.$$

$$\Delta R = \sqrt{(\eta_1 - \eta_2)^2 + (\varphi_1 - \varphi_2)^2}.$$

The calculation of *invariant mass over ΔR of two objects* is done with $\frac{M^2}{2} \times (1/\Delta R^2)$ (no square root in VHDL).

A direct calculation of $1/\Delta R^2$ is not possible in firmware (VHDL code), therefore the implementation of the calculation is done by LUTs. In the hardware the values of these LUTs are stored in "large" ROMs, which was realized using the Block RAMs (BRAMs) of the Virtex chip.

Due the limited number of available BRAMs there are some restrictions for creating algorithms with *invariant mass over ΔR* :

- Objects must have the same type (e.g.: "muon muon", "eg eg", ...)
- Objects must be of same bx
- Resolution of $\Delta\eta$ and $\Delta\varphi$:
 - Full resolution for calos (max. deta bins=230, max. dphi bins=72)
 - Half resolution only for muons (max. deta bins=226, max. dphi bins=144)
- If $1/\Delta R^2=0$ ($\Delta\eta=0$ and $\Delta\varphi=0$) then correlation cut *invariant mass over ΔR* is true
- The values of LUTs are only valid for current definitions and restrictions. Every change might cause a recalculation of the values and a regeneration of IPs (representing LUTs in BRAMs) in Vivado (firmware generation tool)

The values of LUTs in firmware are listed in coe files of ROMs (created by same scripts mentioned above), currently 5 ROMs for "calo calo" and 6 ROMs for "muon muon" (see [lut_calor_inv_dr_sq_rom1.coe](#), etc. and [lut_muon_inv_dr_sq_rom1.coe](#), etc.). The addresses of the BRAMs are given by $\Delta\eta$ and $\Delta\varphi$. All ROMs for calos have 4096 addresses, for muons 8192 addresses. The data width of ROMs is different depending on the highest LUT value in ROM. Because of these different data widths, the partitioning of several ROMs was done to save BRAM resources. Currently 873 BRAMs (36kb) are available per Virtex chip. Following numbers of BRAMs (36kb) are needed for:

- "calo calo": 660
- "muon muon": 672

Currently one calculation of *invariant mass over ΔR* of "calo calo" or "muon muon" is possible in one Virtex chip, but one can have some algorithms containing *invariant mass over ΔR* with different thresholds, but with same objects and same bx.

Invariant mass calculation for three objects

The calculation of *invariant mass calculation for three objects* is done by calculating the invariant mass for all two-object combinations and take the sum of the three invariant masses of the two-object combinations.

Two-body pt calculation

The calculation of *two-body pt* is done with formula:

$$pt = \sqrt{pt_1^2 + pt_2^2 + 2pt_1pt_2(\cos(\varphi_1)\cos(\varphi_2) + \sin(\varphi_1)\sin(\varphi_2))}$$

The calculation of pt^2 in VHDL (no square root in VHDL) using LUTs for pt_1 , pt_2 , $\cos(\varphi)$ and $\sin(\varphi)$.

Muon charge correlation

For definition of muon charge, see [4.4.4](#).

In the muon charge correlation module ([muon_charge_correlations.vhd](#)), the charge correlations are made for different muon conditions-types. The module is instantiated in the top-of-hierarchy module ([gt1_module.vhd](#)) and not inside of a muon conditions module. The charges of objects (number of objects depends on muon condition type) are compared to get "like sign charge" ("LS") or "opposite sign charge" ("OS"), "LS" means that the charges (charge sign) of objects are the same, "OS" means that at least one object has different charge than the others. This information is used in all instantiated muon conditions. There is no charge correlation for single type conditions.

In all cases the "charge valid" bit of the objects must be set.

In TME one can select "LS", "OS" or ignore for charge correlation in muon conditions.

Table 19: Muon charge correlation - Double Muon

| | |
|-----|--|
| x x | I ignore (charge x = +, -, I) |
| + + | LS both positive muons |
| - - | LS both negative muons |
| I I | LS both muons with the same sign, positive or negative |
| + - | OS two muons of opposite sign |
| - + | OS idem |
| I I | OS idem |

Table 20: Muon charge correlation - Triple Muon

| | |
|-------|--|
| x x x | I ignore (charge x = +, -, I) |
| + + + | LS three muons of positive charge |
| - - - | LS three muons of negative charge |
| I I I | LS three muons of the same sign (positive or negative) |
| + + - | OS a pair plus a positive muon |
| + - - | OS a pair plus a negative muon |
| + - I | OS a pair plus a negative or positive muon |

Table 21: Muon charge correlation - Quad Muon

| | |
|---------|---|
| x x x x | I ignore (charge x = +, -, I) |
| + + + + | LS four muons of positive charge |
| - - - - | LS four muons of negative charge |
| I I I I | LS four muons of the same sign (positive or negative) |
| + + + - | OS a pair plus two positive muons |
| + + - - | OS two pairs |
| + - - - | OS a pair plus two negative muons |
| + - I I | OS a pair plus two negative or positive muons |

4.4.7 Calculation of look-up-tables (LUTs) for correlation cuts

LUTs are defined as a VHDL "constant" in `gt1_luts_pkg.vhd` (VHDL package file). The values of precision and step size are given by "scale_set" in XML file of a L1 menu.

Overview of precision types for correlation cuts (an example for electron/ γ electron/ γ correlation):

- *EG-EG-Delta* relevant for DeltaEta and DeltaPhi LUTs
- *EG-EG-MassPt* relevant for pt and unconstrained pt LUTs (used in mass and two-body pt calculations)
- *EG-EG-Math* relevant for $\cos(\text{DeltaPhi})$ and $\cosh(\text{DeltaEta})$ LUTs (used in mass calculations)
- *EG-EG-InverseDeltaRMath* relevant for $1/\text{DeltaR}$ LUTs (used in mass over deltaR calculations)
- *EG-EG-TwoBodyPtMath* relevant for $\cos(\text{Phi})$ and $\sin(\text{Phi})$ LUTs (used in two-body pt calculations)
- *EG-EG-DeltaOverlapRemoval* is obsolete, used EG-EG-Delta (same scales for η and φ)
- *EG-EG-Mass* currently not used
- *EG-EG-TwoBodyPt* is obsolete, used EG-EG-MassPt

Overview of precision names (example for "MassPt"):

EG-EG-MassPt
EG-JET-MassPt
EG-TAU-MassPt
JET-JET-MassPt
JET-TAU-MassPt
EG-ETM-MassPt
JET-ETM-MassPt
TAU-ETM-MassPt
EG-HTM-MassPt
JET-HTM-MassPt
TAU-HTM-MassPt
EG-ETMHF-MassPt
JET-ETMHF-MassPt
TAU-ETMHF-MassPt
EG-MU-MassPt
JET-MU-MassPt
TAU-MU-MassPt
MU-MU-MassPt
MU-ETM-MassPt
MU-HTM-MassPt

MU-ETMHF-MassPt

LUTs for p_T and unconstrained p_T used in mass and two-body pt calculations

The values of p_T or unconstrained p_T LUT are calculated by building the half difference of maximum and minimum value of a bin, adding minimum value, rounding at precision position after decimal point and multiplying with $10^{\text{precision}}$ to get integer values.

The address input of the LUT for p_T or unconstrained p_T is the value of hardware index of p_T or unconstrained p_T .

The precision values in XML file are given by (an example for electron/ γ electron/ γ correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-MassPt</type>
...
<n_bits>1</n_bits>
</scale>
```

VHDL names of p_T and unconstrained p_T LUTs:

EG_PT_LUT (used also for tau)

JET_PT_LUT

ETM_PT_LUT (used also for HT_{miss} and ET_{miss}^{HF})

MU_PT_LUT

MU_UPT_LUT

LUTs for $\Delta\eta$

The values of the LUT are calculated by multiplying $\Delta\eta$ in hardware indices with η step size, rounding at precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

The address of the LUT is the value of $\Delta\eta$ in hardware indices.

The precision value in XML file is given by (an example for electron/ γ electron/ γ correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-Delta</type>
...
<n_bits>3</n_bits>
</scale>
```

where $\langle n_bits \rangle$ is the precision value and $\langle type \rangle$ represents a precision name.

The η ($=\Delta\eta$) step size in XML file is given by (an example for electron/ γ):

```
<scale>
<object>EG</object>
<type>ETA</type>
```



```
...
<step>+4.3499999999999997E-02</step>
...
</scale>
```

VHDL names of $\Delta\eta$ LUTs:

```
CALO_CALO_DIFF_ETA_LUT
CALO_MU_DIFF_ETA_LUT
MU_MU_DIFF_ETA_LUT
```

LUTs for $\Delta\varphi$

The values of the LUT are calculated by multiplying $\Delta\varphi$ in hardware indices with φ step size, rounding at precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

The address of the LUT is the value of $\Delta\varphi$ in hardware indices.

The precision values of $\Delta\varphi$ are identical with $\Delta\eta$.

The φ ($=\Delta\varphi$) step size in XML file is given by (an example for electron/ γ):

```
<object>EG</object>
<type>PHI</type>
...
<step>+4.3633231299858237E-02</step>
...
</scale>
```

VHDL names of $\Delta\varphi$ LUTs:

```
CALO_CALO_DIFF_PHI_LUT
CALO_MU_DIFF_PHI_LUT
MU_MU_DIFF_PHI_LUT
```

LUTs for $\cosh(\Delta\eta)$ used in mass calculations

The values in the LUT are calculated by multiplying $\Delta\eta$ in hardware indices with η step size, calculating cosine hyperbolic, rounding at "Math" precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

The address of the LUT for $\cosh(\Delta\eta)$ is the value of $\Delta\eta$ in hardware indices.

For calo muon correlations one has to use the muon step size.

The precision values in XML file are given by (an example for electron/ γ electron/ γ correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-Math</type>
```

...
`<n_bits>3</n_bits>`
`</scale>`
 used for $\cosh(\Delta\eta)$ and $\cos(\Delta\varphi)$.

VHDL names of $\cosh(\Delta\eta)$ LUTs:
 CALO_CALO_COSH_DETA_LUT
 CALO_MUON_COSH_DETA_LUT
 MU_MU_COSH_DETA_LUT

LUTs for $\cos(\Delta\varphi)$ used in mass calculations

The values in the LUT are calculated by multiplying $\Delta\varphi$ in hardware indices with φ step size, calculating cosine, rounding at "Math" precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

The address of the LUT for $\cos(\Delta\varphi)$ is the value of $\Delta\varphi$ in hardware indices. For calo muon correlations one has to use the muon step size.

VHDL names of $\cos(\Delta\varphi)$ LUTs:
 CALO_CALO_COS_DPHI_LUT
 CALO_MUON_COS_DPHI_LUT
 MU_MU_COS_DPHI_LUT

LUTs for $1/\Delta R^2$ used in mass over deltaR calculations

The calculation of $1/\Delta R^2$ is done by multiplying $\Delta\eta$ in hardware indices with η step size, making the square, doing the same for $\Delta\varphi$, adding the squares, inverting the sum, rounding at "InverseDeltaRMath" precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values. The address of the two-dimensional LUT for $1/\Delta R^2$ consists of values of $\Delta\eta$ and $\Delta\varphi$ in hardware indices.

The precision values in XML file are given by (an example for electron/ γ electron/ γ correlation):

`<scale>`
`<object>PRECISION</object>`
`<type>EG-EG-InverseDeltaRMath</type>`
 ...
`<n_bits>5</n_bits>`
`</scale>`

Precision names for "InverseDeltaRMath":
 EG-EG-InverseDeltaRMath
 JET-JET-InverseDeltaRMath
 TAU-TAU-InverseDeltaRMath
 MU-MU-InverseDeltaRMath

LUTs for $\cos(\varphi)$ used in two-body pt calculations

The values in the LUT are calculated by building the half difference of maximum and minimum value of a φ bin, adding minimum value, calculating cosine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

The precision values in XML file are given by (an example for electron/ γ electron/ γ correlation):

```
<scale>
<object>PRECISION</object>
<type>EG-EG-TwoBodyPtMath</type>
...
<n_bits>3</n_bits>
</scale>
```

used for $\cos(\varphi)$ and $\sin(\varphi)$.

VHDL names of $\cos(\varphi)$ LUTs:

CALO_COS_PHI_LUT
MUON_COS_PHI_LUT

LUTs for $\sin(\varphi)$ used in two-body pt cuts

The values in the LUT are calculated by building the half difference of maximum and minimum value of a φ bin, adding minimum value, calculating sine, rounding at "TwoBodyPtMath" precision position after decimal point and multiplying the result with $10^{\text{precision}}$ to get integer values.

VHDL names of $\sin(\varphi)$ LUTs:

CALO_SIN_PHI_LUT
MUON_SIN_PHI_LUT

4.4.8 Combination conditions

4.4.8.1 Combination conditions definition

A condition consists of input data and a set of requirements, which contain the requirements to be complied. The requirements are called "object cuts".

The requirement list contains:

thresholds for p_T , ranges for η and φ , LUTs for isolation, LUTs for quality, requested charges, thresholds for unconstrained p_T , a LUT for impact parameter. The condition is complied, if every comparison between object parameters and requirements is valid for the following object cuts (only for requested cuts):

For Calorimeter input data:

- p_T greater-equal (or equal) threshold
- η in range
- φ in range
- iso LUT

For Muon input data:

- p_T greater-equal (or equal) threshold
- η in range
- φ in range
- iso LUT
- requested charge
- quality LUT
- unconstrained p_T greater-equal (or equal) threshold
- impact parameter LUT

There are different types of conditions implemented, depending of how many objects have to comply the requirements.

- "Quad objects requirements condition": this condition type consists of requirements for 4 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 4 different objects, each of which fulfills at least one of the requirements.
- "Triple objects requirements condition": this condition type consists of requirements for 3 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 3 different objects, each of which fulfills at least one of the requirements.

- "Double objects requirements condition": this condition type consists of requirements for 2 different trigger objects of the same object type. For each object the requirements can be different. To fulfill this condition, there must exist at least one set of 2 different objects, each of which fulfills at least one of the requirements.²
- "Single object requirement condition": this condition type consists of one requirement for one trigger object of a given object type. To fulfill this condition, there must exist at least one object which fulfills the requirement.

The values of the requirements are given by VHDL Producer for every Trigger Menu.

The input data objects have to be of same type and same bunch-crossing.

With "Double objects requirements condition" a correlation cut of "two-body pt" can be required (calorimeter and muon objects).

Additionally charge correlation cuts with "Double objects requirements condition", "Triple objects requirements condition" and "Quad objects requirements condition" of muon objects can be required.

²"Double objects requirements condition with spatial correlation" not used anymore, replaced by Correlation conditions

Table 22: Explanation of Listing 6

| Item | Explanation |
|---------------------|---|
| et_ge_mode | 'mode-selection' for the E_T comparator. Valid strings are 'true' and 'false' (type is boolean), 'true' means comparator works on greater/equal, 'false' means equal (for tests only) |
| obj_type | valid strings are 'ETT_TYPE', 'HTT_TYPE', 'ETM_TYPE', 'HTM_TYPE' and 'ETMHF_TYPE'. |
| et_threshold | threshold value for comparison in E_T . The size of the std_logic_vector depends on the number of E_T bits. |
| phi_full_range | boolean to set full range of φ . |
| phi_w1_upper_limits | "upper limit" of "window"-comparator 1 for φ . |
| phi_w1_lower_limits | "lower limit" of "window"-comparator 1 for φ . |
| phi_w2_ignore | boolean to ignore "window"-comparator 2 for φ . |
| phi_w2_upper_limits | "upper limit" of "window"-comparator 2 for φ . |
| phi_w2_lower_limits | "lower limit" of "window"-comparator 2 for φ . |
| clk | clock input (LHC clock). |
| data_i | input data, structure defined in obj_type. |
| condition_o | output of condition (routed to Algorithms logic, see 4.4.15). |

4.4.9 Energy sum quantities conditions

4.4.9.1 Energy sum quantities conditions module (including Asymmetry conditions)

For the entity-declaration of `esums_conditions.vhd`, see Listing 6.

Listing 6: Entity declaration of `esums_conditions.vhd`

```

entity esums_conditions is
  generic
    et_ge_mode : boolean;
    obj_type : natural := ETT_TYPE; -- ett=0, ht=1, etm=2, htm=3
    et_threshold: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0);
    phi_full_range : boolean;
    phi_w1_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w1_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w2_ignore : boolean;
    phi_w2_upper_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
    ;
    phi_w2_lower_limit: std_logic_vector(MAX_ESUMS_TEMPLATES_BITS-1 downto 0)
  ;
  port(
    clk : in std_logic;
    data_i : in std_logic_vector(MAX_ESUMS_BITS-1 downto 0);
    condition_o : out std_logic
  );
end esums_conditions;

```

A comparator between E_T and a threshold (`et_threshold`) and, depending on object type, a comparison in φ with two "window"-comparators is done in this module. The value for E_T threshold, the 'mode-selection' for the E_T comparator and the limits for the "window"-comparators are given in the generic interface list of the module. The selection whether a comparison in φ is part of the condition is done with the value of the generic parameter 'obj_type' ('ETM_TYPE', 'ETMHF_TYPE', 'HTM_TYPE' and 'HTMHF_TYPE' force a comparison). The comparison in φ is done in the same way as for calorimeter conditions. Additionally the data-structure of input data (`data_i` in port interface list) is provided as a record in this list. The output signal of the module is in high state, if all comparisons are true.

Data for Asymmetry trigger are received on 4 frames on bits 27..20 (8 bits). For every type a comparison with an 8-bit threshold (greater-equal [or equal]) is done. Asymmetry data are interpreted as counts.

4.4.10 Minimum bias trigger conditions

Data for Minimum bias trigger are received on the 4 MSBs of 4 frames used for Energy sum quantities (see [4.4.9](#)).

- MBT0HFP: "minimum bias HF+ threshold 0" bits
- MBT0HFM: "minimum bias HF- threshold 0" bits
- MBT1HFP: "minimum bias HF+ threshold 1" bits
- MBT1HFM: "minimum bias HF- threshold 1" bits

In minimum bias trigger conditions module there is a comparison with a 4-bit threshold (greater-equal [or equal]).

4.4.11 Towercount condition

Data for Towercount trigger (number of firing HCAL towers) are received on frame HT (see [4.4.9](#)) on bits 24..12 (13 bits) of HT data structure.

In towercount condition module there is a comparison with a 13-bit threshold (greater-equal [or equal]).

4.4.12 Centrality condition

Centrality bits used as a signals for triggers (similar to external signals).

4.4.13 Correlation conditions

The correlation conditions contain a combination of two "Single object requirement conditions" of two object types or one "Double objects requirement condition" of objects of the same type. In addition with object cuts there are correlation cuts for $\Delta\eta$, $\Delta\varphi$, ΔR , mass, mass divided by ΔR and "two-body pt".

The correlation condition of "Invariant mass for three objects" contains one "Triple objects requirement condition" of objects of the same type with one object cut for mass.

List of correlation cuts in [4.4.6](#).

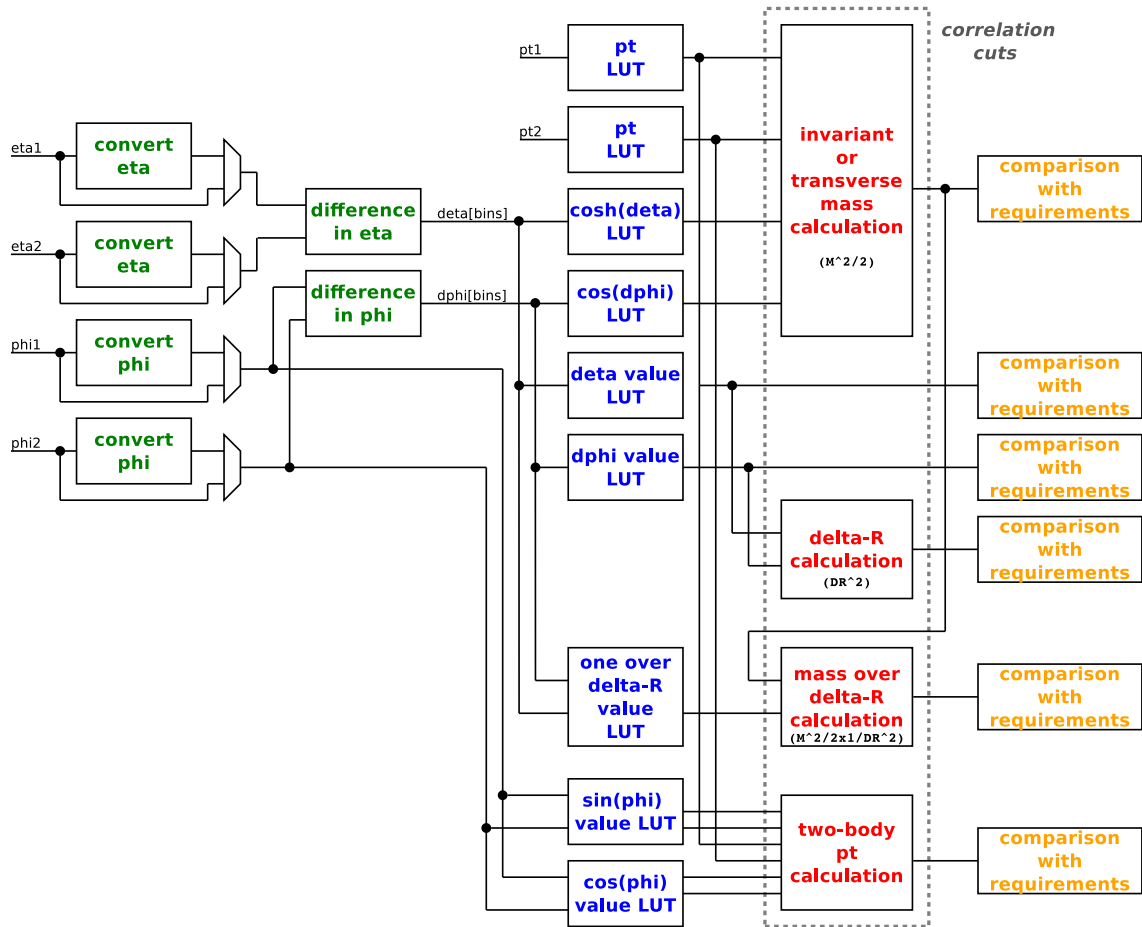


Figure 12: VHDL structure of cuts for correlation conditions

Overview of correlation cuts in conditions

The following list gives an overview of possible correlation cuts in conditions:

- Calo conditions:
 - two-body pt (for double condition)
- Calo conditions overlap removal:

- $\Delta\eta$ overlap removal
 - $\Delta\varphi$ overlap removal
 - ΔR overlap removal
 - two-body pt (for double condition)
- Muon conditions:
 - charge correlation
 - two-body pt (for double condition)
- Calo calo correlation condition with calo overlap removal:
 - $\Delta\eta$ overlap removal
 - $\Delta\varphi$ overlap removal
 - ΔR overlap removal
 - $\Delta\eta$
 - $\Delta\varphi$
 - ΔR
 - invariant mass
 - two-body pt
- Calo calo correlation condition:
 - $\Delta\eta$
 - $\Delta\varphi$
 - ΔR
 - invariant mass
 - two-body pt
- Calo calo correlation condition for invariant mass divided by ΔR :
 - invariant mass divided by ΔR
- Calo calo correlation condition mass with three objects:
 - invariant mass with three objects
- Calo muon correlation condition:
 - $\Delta\eta$
 - $\Delta\varphi$
 - ΔR
 - invariant mass
 - two-body pt
- Calo esums correlation condition:

- $\Delta\varphi$
 - transverse mass
 - two-body pt
- Muon muon correlation condition:
 - charge correlation
 - $\Delta\eta$
 - $\Delta\varphi$
 - ΔR
 - invariant mass or invariant mass unconstraint pt
 - two-body pt
- Muon muon correlation condition for invariant mass divided by ΔR :
 - charge correlation
 - invariant mass divided by ΔR
- Muon muon correlation condition mass with three objects:
 - charge correlation
 - invariant mass with three objects
- Muon esums correlation condition:
 - $\Delta\varphi$
 - transverse mass
 - two-body pt

4.4.13.1 Correlation condition module

As described in section Correlation conditions (4.4.13), correlations of two object types are available. Therefore several correlations (objects 1-objects 2) are possible:

- Correlation condition with calorimeter objects
electron/ γ -electron/ γ , electron/ γ -jet, electron/ γ -tau, jet-jet, jet-tau and tau-tau.
- Correlation condition with calorimeter objects and energy sum quantities (ET_{miss} , ET_{miss}^{HF} and HT_{miss} only)
electron/ γ -etm, jet-etm, tau-etm, electron/ γ -htm, jet-htm, tau-htm, electron/ γ -etmhf, jet-etmhf and tau-etmhf.
- Correlation condition with calorimeter objects and muons objects
electron/ γ -muon, jet-muon and tau-muon.
- Correlation condition with muon objects

- Correlation condition with muon objects and energy sum quantities (ET_{miss} , ET_{miss}^{HF} and HT_{miss} only)
muon-etm, muon-etmhf and muon-htm.

There are two correlations for mass with three objects:

- Correlation condition for mass with three objects with calorimeter objects (same type, same bunch-crossing)
- Correlation condition for mass with three objects with muon objects

In correlation condition with calorimeter and muons objects we have different scales of calorimeter and muon objects in η and φ , therefore LUTs for conversion of the calorimeter bins to muon bins are used (in `gtl_pkg.vhd`: e.g. `EG_ETA_CONV_2_MUON_ETA_LUT` and `EG_PHI_CONV_2_MUON_PHI_LUT`).

Remark:

The center value of bins are used as reference value for conversion. The content of `EG_ETA_CONV_2_MUON_ETA_LUT` is calculated with formular:

"converted-calo-eta[bin] = calo-eta[bin] \times 4 + 2",

of `EG_PHI_CONV_2_MUON_PHI_LUT` with formular:

"converted-calo-phi[bin] = calo-phi[bin] \times 4 + 2".

Definitions of scales (see Tables 8, 9, 11 and 12):

- Calorimeter objects:

$$- \eta \text{ bin width} = \frac{0.087}{2} \text{ (bin 0 from 0.0 to } \frac{0.087}{2} \text{)}$$

$$- \phi \text{ bin width} = \frac{2\pi}{144} \text{ (bin 0 from 0.0 to } \frac{2\pi}{144} \text{)}$$

- Muon objects:

$$- \eta \text{ bin width} = \frac{0.087}{8} \text{ (bin 0 from } 0.5 \times \frac{-0.087}{8} \text{ to } 0.5 \times \frac{+0.087}{8} \text{)}$$

$$- \phi \text{ bin width} = \frac{2\pi}{576} \text{ (bin 0 from 0.0 to } \frac{2\pi}{576} \text{)}$$

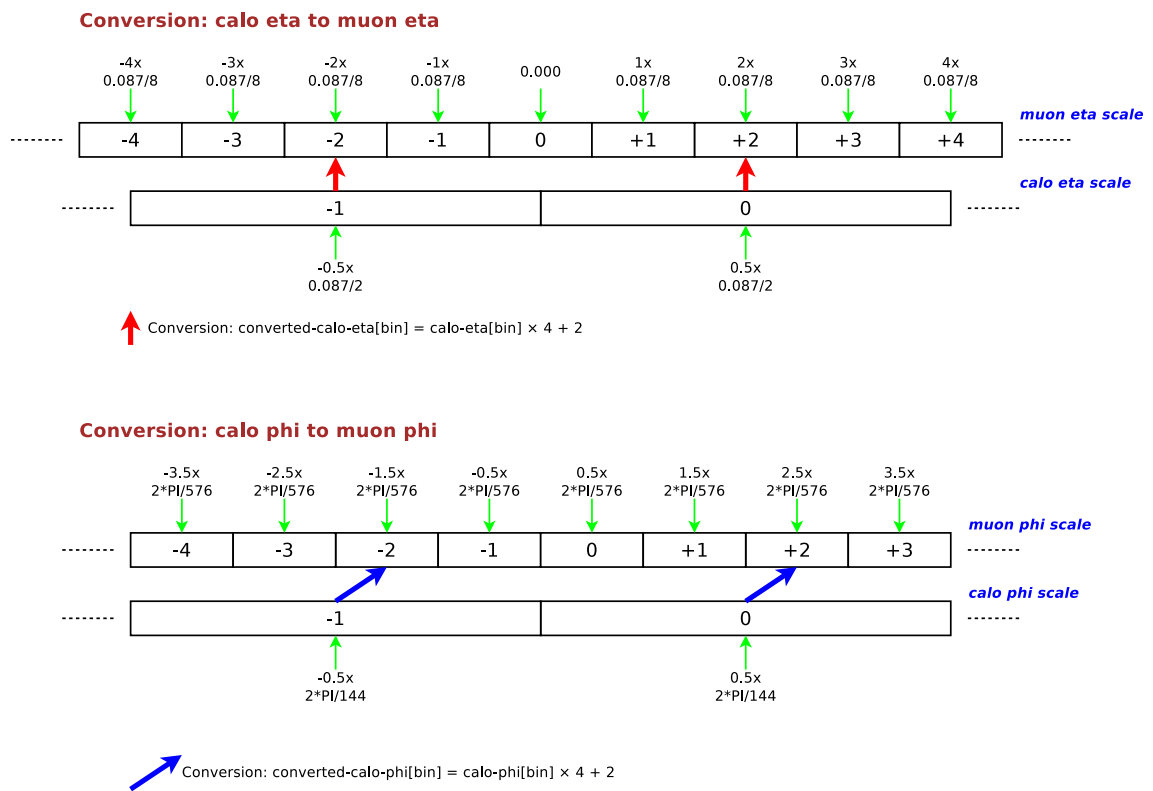


Figure 13: Conversion of calorimeter η and φ to muon scales

4.4.14 External Conditions

Maximal 256 External Conditions are possible in Global Trigger. They are provided as inputs in the Algorithms logic of μ GTL. External Conditions will include the "Technical Trigger" of the legacy system.

4.4.15 Algorithms logic

The outputs of all the instantiated conditions are combined in the Algorithms logic with boolean algebra given by TME for every single Algorithm. These Algorithms are registered and provided as inputs for Final Decision Logic.

5 Final Desicion Logic

This description is for version v1.3.6 of Final Desicion Logic.

The Final Desicion Logic (μ FDL) firmware contains algo-bx-masks, suppression of algos caused by calibration trigger, prescalers, veto-masks and rate-counters ("before prescalers", "after prescalers" and "post dead time") for each Algorithm and the local Final-OR- and veto-logic.

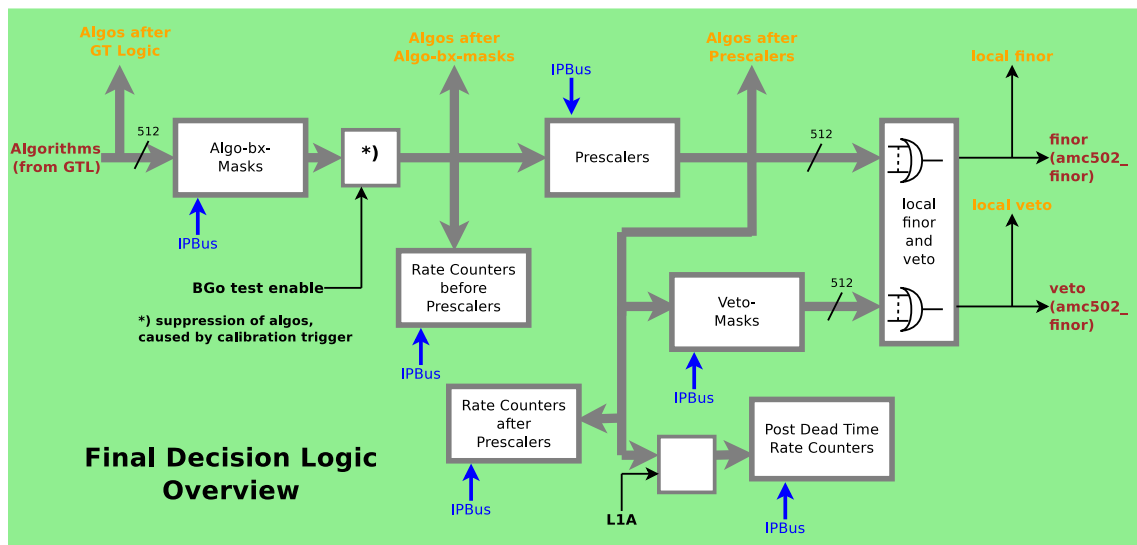


Figure 14: μ FDL firmware

5.1 μ FDL Interface

Inputs:

- Algorithms from μ GTL
- IPBus interface (for registers, counters and memories)
- LHC-clock
- Reset signal
- BC0, BGo test-enable, L1A
- Begin of lumi-section

Outputs:

- Prescale factor set index to Readout-Process

- Algorithms after GTLogic to Readout-Process
- Algorithms after algo-bx-masks to Readout-Process
- Algorithms after prescalers to Readout-Process
- Algorithms after Final-OR-masks to Readout-Process
- Local Final-OR to Readout-Process
- Local veto to Readout-Process
- Local Final-OR with veto to Readout-Process
- Local Final-OR to mezzanine
- Local veto to mezzanine
- Local Final-OR with veto to mezzanine

5.2 MP7 Final-OR hardware solution

The firmware of μ FDL in this document is based on a hardware configuration with maximum 6 μ GT modules.

5.3 Data flow



Figure 15: μ FDL pipeline

Every Algorithm, in total 512 coming from μ GTL, passes a algo-bx-mask, the logic for suppression of algos caused by calibration trigger and a prescaler, which reduces the trigger rate by a given factor. Prescaled Algorithms signals are combined to a local final-or-signal (Final-OR). For every Algorithm there is a rate-counter before prescaler and after prescaler, which are incremented by LHC-clock if the Algorithm is true. In addition there are post-dead-time counters, one for each Algorithm, which are incremented, if the Algorithm and the L1A-signal are true at the same bunch-crossing. Algorithms after GTLogic, after algo-bx-masks, after prescalers, the local Final-OR- and local veto-signal are provided for read-out-record.

If there are not enough firmware resources in one μ GT board, more boards could be used. Therefore the 512 Algorithms are partitioned by TME. TME will set the number of Algorithms as constant in the package module `gtl_pkg.vhd`. This means μ GTL and μ FDL firmware considered as a unit for synthesis. In the case of more μ GT boards, the local Final-OR and local veto are routed via a mezzanine board on MP7 (located on "General Purpose I/O connector") to the FINOR-AMC502 module, where the total Final-OR is created and send to TCDS.

A mapping for Algorithms is provided, to give flexibility for setting the index of Algorithms:

- creating a mapping instance (`algo_mapping_rop.vhd`) by VHDL Producer, this component will be instantiated in fix part of FDL, and new calculation will done each time over TME.
- TME delivers just the number of Algorithms, which will be built on each card.
- from FDL point of view, FDL see incremented number of Algorithms indexes, e.g. 0, 1, 2, which is e.g. 69, 200, 300.
- TME should take care of assignment of each Algorithm to a number, that means if in card 1 `algo_59` is defined, nobody allows to produce the same number again.

5.4 Implementation in firmware

The entity-declaration of `fdl_module.vhd` is shown in 5.3.

Listing 7 contains the entity-declaration of the `fdl_module.vhd`.

Listing 7: Entity declaration of `fdl_module.vhd`

```
entity fdl_module is
  generic(
    SIM_MODE : boolean := false; -- if SIM_MODE = true, "algo_bx_mask" is
      given by "algo_bx_mask_sim".
    PRESCALE_FACTOR_INIT : ipb_regs_array(0 to MAX_NR_ALGOS-1);
    MASKS_INIT : ipb_regs_array(0 to MAX_NR_ALGOS-1);
    PRESCALE_FACTOR_SET_INDEX_WIDTH : positive := 8;
    PRESCALE_FACTOR_SET_INDEX_REG_INIT : ipb_regs_array(0 to 1) := (others =>
      X"00000000");
    L1A_LATENCY_DELAY_INIT : ipb_regs_array(0 to 1) := (others => X"00000000"
    );
    CNTRL_REG_INIT : ipb_regs_array(0 to 1) := (others => X"00000000");
    -- Input flip-flops for algorithms of fdl_module.vhd - used for tests of
      fdl_module.vhd only
    ALGO_INPUTS_FF: boolean := false
  );
  port(
    ipb_clk          : in std_logic;
    ipb_rst          : in std_logic;
    ipb_in           : in ipb_wbus;
    ipb_out          : out ipb_rbus;

    -- =====
    lhc_clk          : in std_logic;
    lhc_rst          : in std_logic;
    bcre             : in std_logic;
    test_en          : in std_logic;
    l1a              : in std_logic;
    begin_lumi_section : in std_logic;
    algo_i           : in std_logic_vector(NR_ALGOS-1 downto 0);
    bx_nr_out        : out std_logic_vector(11 downto 0);
    prescale_factor_set_index_rop : out std_logic_vector(
      PRESCALE_FACTOR_SET_INDEX_WIDTH-1 downto 0);
    algo_after_gtLogic_rop : out std_logic_vector(MAX_NR_ALGOS-1 downto 0);
    algo_after_bxomask_rop : out std_logic_vector(MAX_NR_ALGOS-1 downto
      0);
    algo_after_prescaler_rop : out std_logic_vector(MAX_NR_ALGOS-1
      downto 0);
    local_finor_rop   : out std_logic;
    local_veto_rop    : out std_logic;
    finor_2_mezz_lemo : out std_logic; -- to LEMO
    finor_preview_2_mezz_lemo : out std_logic; -- to LEMO
    veto_2_mezz_lemo  : out std_logic; -- to LEMO
    finor_w_veto_2_mezz_lemo : out std_logic; -- to tp_mux.vhd
    local_finor_with_veto_o : out std_logic; -- to SPY2_FINOR
    -- HB 2016-03-02: v0.0.21 - algo_bx_mask_sim input for simulation use with
      MAX_NR_ALGOS (because of global index).
    algo_bx_mask_sim : in std_logic_vector(MAX_NR_ALGOS-1 downto 0)
```

```
);  
end fdl_module;
```

Table 23: Explanation of Listing 7

| Item | Explanation |
|------------------------------------|--|
| SIM_MODE | switch for simulation mode. |
| PRESCALE_FACTOR_INIT | init value for prescale factor. |
| MASKS_INIT | init value for BX mask. |
| PRESCALE_FACTOR_SET_INDEX_WIDTH | width of prescale factor set index. |
| PRESCALE_FACTOR_SET_INDEX_REG_INIT | init value prescale factor set index register. |
| L1A_LATENCY_DELAY_INIT | init value of L1A latency delay. |
| CNTRL_REG_INIT | init value control register. |
| ALGO_INPUTS_FF | switch for algos input flip-flops. |
| ipb_clk | IPBus clock input. |
| ipb_rst | IPBus reset input. |
| ipb_in | IPBus data input. |
| ipb_out | IPBus data output. |
| lhc_clk | clock input (LHC clock). |
| lhc_rst | reset input. |
| bcrest | TTC BGo bunch counter reset input. |
| test_en | TTC BGo test enable input. |
| lla | L1A input. |
| begin_lumi_section | begin of lumisection input. |
| algo_i | algos input. |
| bx_nr_out | bunch crossing number output. |
| prescale_factor_set_index | prescale factor set data output. |
| algo_after_gtLogic_rop | algos after GTL output. |
| algo_after_bxomask_rop | algos after BX mask output. |
| algo_after_prescaler_rop | algos after prescaler output. |
| local_finor_rop | local FINOR output. |
| local_veto_rop | local VETO output. |
| finor_2_mezz_lemo | FINOR to MP7 mezzanine board and via LEMO connection to FINOR board. |
| finor_preview_2_mezz_lemo | FINOR preview to MP7 mezzanine board and via LEMO connection to FINOR preview board. |
| veto_2_mezz_lemo | VETO to MP7 mezzanine board and via LEMO connection to FINOR board. |
| finor_w_veto_2_mezz_lemo | FINOR with VETO to MP7 mezzanine board and via LEMO connection to FINOR board. |
| local_finor_with_veto_o | local FINOR with VETO output. |
| algo_bx_mask_sim | algo BX mask input for simulation. |

5.5 Main parts

The top-of-hierarchy module (`fdl_module.vhd`) contains

- version registers
- a command pulse register
- prescalers for all Algorithms
- registers for prescale factors
- register for prescale factor set index
- rate-counters for all Algorithms, finor, veto, L1A and post-dead-time
- read only registers for rate-counter values
- algo-bx-masks for all Algorithms
- Final-OR-masks for all Algorithms
- veto-masks for all Algorithms
- the Final-OR-logic

5.5.1 Registers and memories

All registers and memories are 32 bits wide. (A first draft of the definition of the relative addresses is shown in Table [24](#).)

- Dual-port memories for the algo-bx-masks are implemented. For each Algorithm there is a mask bit at every bunch crossing of one orbit. Therefore in total memories of 4096 x 512 bits are implemented. Because of the 32 bit data interface, 16 memories each with a size of 4096 x 32 bits are instantiated.
- Read-only registers for the value of rate-counters (before and after prescalers, post-dead-time counters) are implemented, 512 registers, one for every Algorithm. Rate-counter value has 32 bits.
- Registers for prescale factor of the prescalers are implemented, 512 registers, one for every Algorithm. A prescale factor value has 24 bits.
- Registers for masks (finor- and veto-masks) are implemented, 512 registers.
- One register for prescale factors set index is implemented. This register contains a value, which is unique for a given set of prescale factors. The content of this register is part of Readout-record.

- One register for command pulses is implemented. One bit of this register (bit 0) is used for "setting the request signal for updating prescale factors high", which enables, that the prescale factors and the prescale factor set index are loaded at the begin of a luminosity segment period. (Other bits are not defined yet.)
- One control register is implemented (the content has to be defined).
- 32 register for L1 Trigger Menu name for μ GTL is implemented.
- 4 register for L1 Trigger Menu UUID for μ GTL is implemented.
- One register for L1 Trigger Menu compiler version is implemented.
- One register for μ FDL firmware version is implemented.
- One register for μ GTL firmware (fixed code) version is implemented.

5.5.1.1 Register map

The register map for μ FDL has a base address of 0x90000000.

Table 24: μ FDL register map

| Offset | Register name | Access | Description |
|------------|-------------------------------|--------|--|
| 0x90000000 | Algo BX masks (0) | r/w | 4096 memory addresses of algo-bx-masks for Algorithms 0-31. |
| 0x90001000 | Algo BX masks (1) | r/w | 4096 memory addresses of algo-bx-masks for Algorithms 32-63. |
| ... | ... | ... | ... |
| 0x9000F000 | Algo BX masks (15) | r/w | 4096 memory addresses of algo-bx-masks for Algorithms 480-511. |
| 0x90010000 | Rate counter before prescaler | r | 512 read-only registers for rate-counter values before prescalers. |
| 0x90010200 | Prescale factors | r/w | 512 registers for prescale factors. |
| 0x90010400 | Rate counter after prescaler | r | 512 read-only registers for rate-counter values after prescalers. |
| 0x90010600 | Rate counter post-dead-time | r | 512 read-only registers for post-dead-time rate-counter values. |
| 0x90010800 | Masks | r/w | 512 registers for finor-masks and veto-masks. Bit 0 = finor-mask, bit 1 = veto-mask. |


Table 24: μ FDL register map

| Offset | Register name | Access | Description |
|------------|----------------------------|--------|--|
| 0x90091880 | Prescale factors set index | r/w | Register for prescale factors set index. |
| 0x900918C0 | L1tm name | r | 32 registers for L1 Trigger Menu name for μ GTL. |
| 0x900918E0 | L1tm uuid | r | 4 registers for L1 Trigger Menu UUID for μ GTL. |
| 0x900918E4 | L1tm compiler version | r | Register for L1 Trigger Menu compiler version. |
| 0x900918E5 | GTL FW version | r | Register for firmware version of μ GTL VHDL code. |
| 0x900918E6 | FDL FW version | r | Register for firmware version of μ FDL VHDL code. |
| 0x900918E7 | L1tm FW uuid | r | 4 registers for L1 Trigger Menu FW UUID for μ GTL. |
| 0x900918EB | SVN revision number | r | Register for SVN revision number. |
| 0x900918EC | L1tm uuid hash | r | Register for L1 Trigger Menu UUID hash for μ GTL. |
| 0x900918ED | L1tm FW uuid hash | r | Register for L1 Trigger Menu FW UUID hash for μ GTL. |
| 0x900918EE | Module ID | r | Register for Module ID of L1 Trigger Menu. |
| 0x90091900 | Command Pulses | r/w | Register for command pulses. |
| 0x90091980 | Rate counter finor | r | One read-only registers for finor rate-counter value. |
| 0x90092200 | L1A latency delay | r/w | Register for L1A latency delay value (used for post-dead-time counter). |
| 0x90093000 | Rate counter L1A | r | One read-only registers for L1A rate-counter value. |
| 0x90094000 | Rate counter veto | r | One read-only registers for veto rate-counter value. |
| 0x90095000 | Current prescale set index | r | Read-only register for prescale factors set index, which was "updated" with begin of current lumi-section ("prescale_factors_set_index_reg_updated(0)" in VHDL). |

Table 24: μ FDL register map


| Offset | Register name | Access | Description |
|------------|-----------------------------|--------|---|
| 0x90095001 | Previous prescale set index | r | Read-only register for prescale factors set index, which was "updated" with begin of previous lumi-section for monitoring "prescale_factors_set_index_reg_updated(1)" in VHDL). |
| 0x90096000 | Calibration trigger gap | r/w | Register for begin and end (in Bx) of calibration trigger gap. |

Register 5.1: RATE COUNTER BEFORE PRESCALER

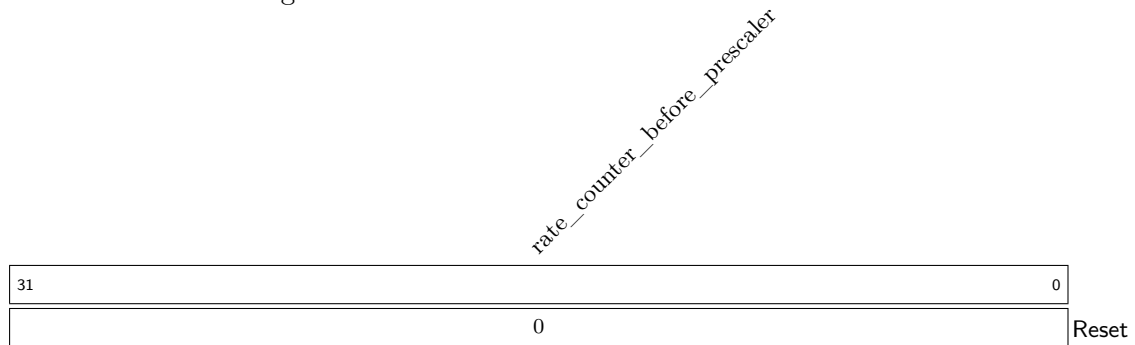

rate_counter_before_prescaler Rate counter before prescaler. Counts the occurance of an algo (given by register address) in one luminosity segment.

Register 5.2: PRESCALE FACTOR

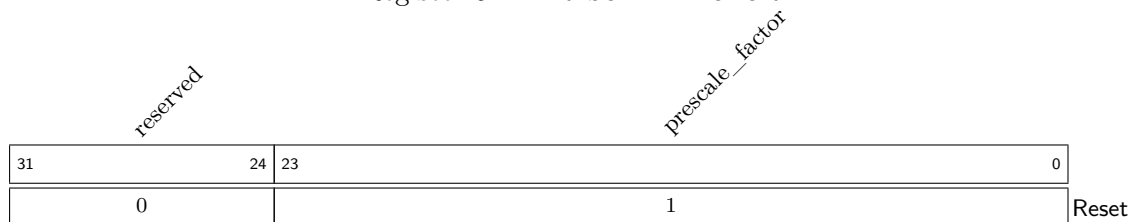

prescale_factor Prescale factor of an algo (given by register address). Prescale factor = 0 means disable algo.

Register 5.3: RATE COUNTER AFTER PRESCALER

| | | | |
|----|--|-------------------------------------|---|
| | | <i>rate_counter_after_prescaler</i> | |
| | | | |
| 31 | | | 0 |
| 0 | | Reset | |

rate_counter_after_prescaler Rate counter after prescaler. Counts the occurrence of an algo (given by register address) in one luminosity segment.

Register 5.4: RATE COUNTER POST-DEAD-TIME

| | | | |
|----|--|----------------------------------|---|
| | | <i>rate_counter_postdeadtime</i> | |
| | | | |
| 31 | | | 0 |
| 0 | | Reset | |

rate_counter_postdeadtime Rate counter post-dead-time. Counts the occurrence of an algo (given by register address) and L1A at the same bx in one luminosity segment.

Register 5.5: MASKS

| | | | | | |
|----|--|-----------------|---|--------------------------------------|---|
| | | <i>reserved</i> | | <i>veto_mask</i> <i>fnor_mask</i> | |
| | | | | | |
| 31 | | | 2 | 1 | 0 |
| 0 | | | | 0 | 1 |
| | | | | Reset | |

veto_mask Selection of a veto (by an algo, given by register address) for veto-or.

fnor_mask Selection of an algo (given by register address) for final-or.

Register 5.6: PRESCALE FACTORS SET INDEX

| | | | | | | | |
|----------|--|---|--|---------------------------|--|---|--|
| 31 | | 8 | | 7 | | 0 | |
| reserved | | | | prescale_factor_set_index | | | |
| 0 | | | | 0 | | | |
| | | | | Reset | | | |

prescale_factor_set_index Index for a certain set of prescale factors.

Register 5.7: L1TM COMPILER VERSION

| | | | | | | | | | | | | | | | | |
|-----------------|----|--|--|--------------|----|--|--|--------------|---|--|--|-----------------|---|--|--|-------|
| <i>reserved</i> | | | | <i>major</i> | | | | <i>minor</i> | | | | <i>revision</i> | | | | |
| 31 | 24 | | | 23 | 16 | | | 15 | 8 | | | 7 | 0 | | | |
| 0 | | | | 0 | | | | 0 | | | | 0 | | | | Reset |

major Major version of L1tm compiler.

minor Minor version of L1tm compiler.

revision Revision version of L1tm compiler.

Register 5.8: GTL FW VERSION

| reserved | | | | major | | | | minor | | | | revision | | | | |
|----------|----|--|--|-------|----|--|--|-------|---|--|--|----------|---|--|--|-------|
| 31 | 24 | | | 23 | 16 | | | 15 | 8 | | | 7 | 0 | | | |
| 0 | | | | 0 | | | | 0 | | | | 0 | | | | Reset |

major Major version of GTL firmware.

minor Minor version of GTL firmware.

revision Revision version of GTL firmware.

Register 5.9: FDL FW VERSION

| reserved | | | | major | | | | minor | | | | revision | | | | |
|----------|----|--|--|-------|----|--|--|-------|---|--|--|----------|---|--|--|-------|
| 31 | 24 | | | 23 | 16 | | | 15 | 8 | | | 7 | 0 | | | |
| 0 | | | | 0 | | | | 0 | | | | 0 | | | | Reset |

major Major version of FDL firmware.

minor Minor version of FDL firmware.

revision Revision version of FDL firmware.

Register 5.10: COMMAND PULSES REGISTER

| | | | | | |
|----|--|---|--|---|-------|
| 31 | | 1 | | 0 | Reset |
| | | | | | |
| 0 | | | | 0 | |

Diagram illustrating the bit fields of Register 5.10: COMMAND PULSES REGISTER. The register is 32 bits wide. Bit 31 is labeled "reserved". Bit 1 is labeled "request_update_factor_pulse". Bit 0 is labeled "Reset".

request_update_factor_pulse Sets the request signal for updating prescale factors high. Updating is done at the next "begin of luminosity segment".

Register 5.11: RATE COUNTER FINOR

| | | | |
|----|--|---|-------|
| 31 | | 0 | Reset |
| | | | |
| 0 | | | |

Diagram illustrating the bit fields of Register 5.11: RATE COUNTER FINOR. The register is 32 bits wide. Bit 31 is labeled "rate_counter_finor". Bit 0 is labeled "Reset".

rate_counter_finor Rate counter finor. Counts the occurance of finor in one luminosity segment.

Register 5.12: L1A LATENCY DELAY

| | | | | | | |
|----|--|---|--|---|---|-------|
| 29 | | 6 | | 5 | 0 | Reset |
| | | | | | | |
| 0 | | | | 0 | | |

Diagram illustrating the bit fields of Register 5.12: L1A LATENCY DELAY. The register is 30 bits wide. Bit 29 is labeled "reserved". Bit 5 is labeled "l1a_latency_delay". Bit 0 is labeled "Reset".

l1a_latency_delay L1A latency delay value (used for post-dead-time counter).

Register 5.13: RATE COUNTER L1A

| | |
|------------------|---|
| rate_counter_l1a | |
| 31 | 0 |
| 0 | |
| Reset | |

rate_counter_l1a Rate counter L1A. Counts the occurance of L1A in one luminosity segment.

Register 5.14: RATE COUNTER VETO

| | |
|-------------------|---|
| rate_counter_veto | |
| 31 | 0 |
| 0 | |
| Reset | |

rate_counter_veto Rate counter veto. Counts the occurance of veto in one luminosity segment.

Register 5.15: CURRENT PRESCALE SET INDEX

| | | | |
|----------|---|-----------------------------------|---|
| reserved | | prescale_factor_set_index_updated | |
| 31 | 8 | 7 | 0 |
| 0 | | 0 | |
| | | Reset | |

prescale_factor_set_index_updated Index for a certain set of prescale factors, which was "updated" with begin of current lumi-section.

Register 5.16: PREVIOUS PRESCALE SET INDEX

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|-----------------------------------|---|--|--|--|--|--|--|--|--|--|--|--|--|--|---|-------|
| reserved | | | | | | | | | | | | | | | | prescale_factor_set_index_updated | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | 8 | 7 | | | | | | | | | | | | | | 0 | |
| 0 | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | | | | | | Reset |

prescale_factor_set_index_updated Index for a certain set of prescale factors, which was "updated" with begin of previous lumi-section.

Register 5.17: CALIBRATION TRIGGER GAP

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------|--|--|--|---|----|--|--|--|--|----|--|--|--|--|--|-----------------------------|--|--|--|---|--|--|----|----|--|--|--|--|----|----|--|----------|--|--|--|-------|--|--|--|--|---|--|--|--|--|--|--|-------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| reserved | | | | | | | | | | | | | | | | end_calibration_trigger_gap | | | | | | | | | | | | | | | | reserved | | | | | | | | | | | | | | | | begin_calibration_trigger_gap | | | | | | | | | | | | | | | |
| 31 | | | | | 28 | | | | | 27 | | | | | | | | | | | | | 16 | 15 | | | | | 12 | 11 | | | | | | | | | | | 0 | | | | | | | | | | | | | | | | | | | | | | |
| 0 | | | | 0 | | | | | | | | | | | | 0 | | | | 0 | | | | | | | | | | | | | | | | Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | |

begin_calibration_trigger_gap Begin of calibration trigger gap (in Bx).

end_calibration_trigger_gap End of calibration trigger gap (in Bx).

5.5.2 Algo-bx-masks

Every Algorithm passes a logic where at every bunch-crossing of the orbit the Algorithm is enabled (or not). The algo-bx-masks are implemented as dual-port memories and loaded at the begin of run. The size of the algo-bx-masks memory is number of bunch-crossings per orbit for address length and number of Algorithms for data-depth (3564 [4096] x 512 bits). The address (bx-number) of the memory for masking the Algorithm is delivered by an address-counter for algo-bx-masks memory, which is reseted with a delay-able bcres signal, to get the correct relations between Algorithms and masks from memory.

5.5.3 Rate-counters

Every Algorithm has a rate-counters with 32 bits, because of the length of one luminosity segment period. There are counters before and after prescalers and post-dead-time counters. The counters before and after prescalers are incremented, if the Algorithm signal is in high state and a positive edge of LHC-clock occur. The post-dead-time counters are incremented, if the Algorithm signal is in high state (delayed by L1A latency delay), a L1A signal and a positive edge of LHC-clock occur. The content of a counter is updated into a register (for reading the counter value) and is reseted at the begin of a luminosity segment period. So there is one luminosity segment period time to read the registers with the counter values by software.

5.5.4 Prescalers

Every Algorithm has a prescaler with a prescale factor of 24 bits. The prescaler reduces the trigger-rate per Algorithm with a factor, so e.g. a factor of 2 passes through every second trigger. A prescale factor of 0 inhibits all triggers of the certain Algorithm. The factor is loaded into a register by software and updated at begin of a new luminosity segment period, if the update was enabled by software ('request_update_factor_pulse' was set in "command_pulses" register). The prescaler works with the new factor. A register for "prescale factor set index" contains a value which represents a certain set of prescale factors. The content of this register is seen in the Readout-record too. The "prescale factor set index" is loaded into the register by software and updated at begin of a new luminosity segment period.

5.5.5 Finor-masks

Every Algorithm passes a Final-OR-mask, which enables the Algorithm for Final-OR. The Final-OR-masks are implemented as registers and loaded at the begin of a run.

5.5.6 Veto-masks

Every Algorithm passes a veto-mask, if at least one Algorithm, which is enabled by veto-mask, becomes high state, then Final-OR is disabled as long as the Algorithm is in high state. The veto-masks are implemented as registers and loaded at the begin of a run.

5.5.7 Finor

The Final-OR-signal is a disjunction of all Algorithms passed the Final-OR-bx-masks. An Algorithm enabled by veto-mask, disables the Final-OR. This is done on the FINOR-AMC502 module.

6 Readout-Process

Data for readout are collected in [output_mux.vhd](#) (part of `frame.vhd`). The readout of Global Trigger data is done via GTH transmitter of MP7 to AMC13.

7 Glossary

- electron/ γ** = electron/gamma objects over Calo-Layer2 (VHDL: eg)
- jet** = jet objects over Calo-Layer2 (VHDL: jet)
- tau** = tau objects over Calo-Layer2 (VHDL: tau)
- muon** = muon objects over μ GMT (VHDL: muon)
- ET** = Scalar sum of transverse energy components over Calo-Layer2 (VHDL: ett)
- ETTEM** = Scalar sum of transverse energy components from ECAL only over Calo-Layer2 (VHDL: ettem)
- MBTxHFy** = Minimum bias HF bits (VHDL: MBT0HFP, MBT0HFM, MBT1HFP, MBT1HFM)
- HT** = Magnitude of the vectorial sum of transverse energy of jets (hadronic) over Calo-Layer2 (VHDL: htt)
- TOWERCOUNT** = tower counts (VHDL: towercount)
- ET_{miss} = 2-vector sum of transverse energy over Calo-Layer2 (VHDL: etm)
- HT_{miss} = Missing Total transverse energy of jets over Calo-Layer2 (VHDL: htm)
- $\mathbf{ET}_{\text{miss}}^{\text{HF}}$ = 2-vector sum of transverse energy including HF over Calo-Layer2 (VHDL: etmhf)
- $\mathbf{HT}_{\text{miss}}^{\text{HF}}$ = Missing Total transverse energy of jets including HF over Calo-Layer2 (VHDL: htmhf)
- ASYMET** = Asymmetry of ET over Calo-Layer2 (VHDL: asymet)
- ASYMHT** = Asymmetry of HT over Calo-Layer2 (VHDL: asymht)
- ASYMETHF** = Asymmetry of ET including HF over Calo-Layer2 (VHDL: asymethf)
- ASYMHthf** = Asymmetry of HT including HF over Calo-Layer2 (VHDL: asymhthf)
- CENTx** = Centrality bits [7:0] over Calo-Layer2 (VHDL: cent7, cent6, ...)
- p_{T} = transverse momentum of muon objects (VHDL: pt)
- E_{T} = energy of calorimeter objects (VHDL: et)
- η = pseudo-rapidity position (VHDL: eta)
- φ = azimuth angle position (VHDL: phi)
- isolation** = isolation information (VHDL: iso)
- quality** = quality information (VHDL: qual)
- charge** = charge information of muon objects (VHDL: ch)

unconstrained p_T = transverse momentum of muon objects (VHDL: upt)

impact parameter = impact parameter information of muon objects (VHDL: ip)

hadronic shower = hadronic shower (muon shower [mus]) information, on bit 61 of MU0, MU2, MU4 and MU6 (VHDL: mus)

DISP = displaced bit of jet objects (VHDL: disp)

index bits = index bits of muon objects - currently not used

8 Acronyms

AMC13 AMC board in uTCA crate for several features (readout, ...)

DAQ Data Acquisition

FDL Final Decision Logic Module

GCT Calorimeter Trigger Layer-2

GMT Global Muon Trigger

GT Global Trigger

GTL Global Trigger Logic Module

ROP Readout Process Module

TCM Timing Counter Manager Module

TCDS Trigger, Control and Distribution System

9 Appendices

Appendix A:

The FPGA on MP7 board receives and transmits data via GTH transceivers. In Figure 16 configuration of GTHs [6] for Global Trigger is shown.

| Objects | Link | MGT_BANK | GTHE2_CHANNEL | RX | TX |
|-------------------------------|------|----------|---------------|----|----|
| MU0 & MU1 | 0 | 118 | X1Y35 | x | |
| MU2 & MU3 | 1 | 118 | X1Y34 | x | |
| MU4 & MU5 | 2 | 118 | X1Y33 | x | |
| MU6 & MU7 | 3 | 118 | X1Y32 | x | |
| EG0..EG5 | 4 | 117 | X1Y31 | x | |
| EG6..EG11 | 5 | 117 | X1Y30 | x | |
| JET0..JET5 | 6 | 117 | X1Y29 | x | |
| JET6..JET11 | 7 | 117 | X1Y28 | x | |
| TAU0..TAU5 | 8 | 116 | X1Y27 | x | |
| TAU6..TAU11 | 9 | 116 | X1Y26 | x | |
| ESUMS | 10 | 116 | X1Y25 | x | |
| free | 11 | 116 | X1Y24 | x | |
| EXT_COND[0:63] | 12 | 115 | X1Y23 | x | |
| EXT_COND[64:127] | 13 | 115 | X1Y22 | x | |
| EXT_COND[128:191] | 14 | 115 | X1Y21 | x | |
| EXT_COND[192:255] | 15 | 115 | X1Y20 | x | |
| ALGO_AFTER_GTLOGIC[0:191] | 16 | 114 | X1Y19 | | x |
| ALGO_AFTER_GTLOGIC[192:383] | 17 | 114 | X1Y18 | | x |
| ALGO_AFTER_GTLOGIC[384:511] | 18 | 114 | X1Y17 | | x |
| ALGO_AFTER_BXMASK[0:191] | 19 | 114 | X1Y16 | | x |
| ALGO_AFTER_BXMASK[192:383] | 20 | 113 | X1Y15 | | x |
| ALGO_AFTER_BXMASK[384:511] | 21 | 113 | X1Y14 | | x |
| ALGO_AFTER_PRESCALER[0:191] | 22 | 113 | X1Y13 | | x |
| ALGO_AFTER_PRESCALER[192:383] | 23 | 113 | X1Y12 | | x |
| ALGO_AFTER_PRESCALER[384:511] | 24 | 112 | X1Y11 | | x |
| Bunchcounters, ... | 25 | 112 | X1Y10 | | x |

Figure 16: Configuration of GTHs

Appendix B:

Figure 17 shows the configuration of optical links to Global Trigger.

Links 0..3 contains muon data from GMT, links 4..11 data from GCT and links 12..15 external conditions from AMC502 boards.

| Frame/Link | Link 0 [mp7 ch 0x00] | Link 1 [mp7 ch 0x02] | Link 2 [mp7 ch 0x04] | Link 3 [mp7 ch 0x06] | Link 4 [mp7 ch 0x08] | Link 5 [mp7 ch 0x0a] | Link 6 [mp7 ch 0x0c] | Link 7 [mp7 ch 0x0e] | Link 8 [mp7 ch 0x10] | Link 9 [mp7 ch 0x12] | Link 10 [mp7 ch 0x14] | Link 11 [mp7 ch 0x16] | Link 12 [mp7 ch 0x18] | Link 13 [mp7 ch 0x1a] | Link 14 [mp7 ch 0x1c] | Link 15 [mp7 ch 0x1e] |
|------------|---|---|---|---|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Frame 0 | free | free | free | free | EG0 | EG6 | JET0 | JET6 | TAU0 | TAU6 | MBP0 & ETTEM & ETT (No HF) | free | E(31:0) | E(95:64) | E(159:128) | E(223:192) |
| Frame 1 | MU0 eta raw on bits 21:13 & MU1 eta raw on bits 30:22 | MU2 eta raw on bits 21:13 & MU3 eta raw on bits 30:22 | MU4 eta raw on bits 21:13 & MU5 eta raw on bits 30:22 | MU6 eta raw on bits 21:13 & MU7 eta raw on bits 30:22 | EG1 | EG7 | JET1 | JET7 | TAU1 | TAU7 | MBM0 & TOWERCNT & HTT (No HF) | free | E(63:32) | E(127:96) | E(191:160) | E(255:224) |
| Frame 2 | MU0(31:0) | MU2(31:0) | MU4(31:0) | MU6(31:0) | EG2 | EG8 | JET2 | JET8 | TAU2 | TAU8 | MBP1 & ETmiss (No HF) & ASYM | free | free | free | free | free |
| Frame 3 | MU0(63:32) | MU2(63:32) | MU4(63:32) | MU6(63:32) | EG3 | EG9 | JET3 | JET9 | TAU3 | TAU9 | MBM1 & HTmiss (No HF) & ASYM | free | free | free | free | free |
| Frame 4 | MU1(31:0) | MU3(31:0) | MU5(31:0) | MU7(31:0) | EG4 | EG10 | JET4 | JET10 | TAU4 | TAU10 | ETmiss (With HF) & ASYM & CENT | free | free | free | free | free |
| Frame 5 | MU1(63:32) | MU3(63:32) | MU5(63:32) | MU7(63:32) | EG5 | EG11 | JET5 | JET11 | TAU5 | TAU11 | [bits 19..0 reserved for: HTmiss (With HF) & ASYM & CENT | free | free | free | free | free |

Figure 17: Optical link inputs to Global Trigger

Appendix C:

Figure 18 shows the configuration of links from Global Trigger to AMC13 (readout).

Links 16..24 contains algo data (after GTL, after BX mask and after prescalers), link 25 contains several counter values.

| | #1 Lane 16 [mp7 ch 0x21] | #2 Lane 17 [mp7 ch 0x23] | #3 Lane 18 [mp7 ch 0x25] | #4 Lane 19 [mp7 ch 0x27] | #5 Lane 20 [mp7 ch 0x29] | #6 Lane 21 [mp7 ch 0x2b] | #7 Lane 22 [mp7 ch 0x2d] | #8 Lane 23 [mp7 ch 0x2f] | #9 Lane 24 [mp7 ch 0x31] | #10 Lane 25 [mp7 ch 0x33] |
|---------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|--|
| Frame 0 | algo_after_gtLogic 0-31 | algo_after_gtLogic 192-223 | algo_after_gtLogic 384-415 | algo_after_bxmask 0-31 | algo_after_bxmask 192-223 | algo_after_bxmask 384-415 | algo_after_prescaler 0-31 | algo_after_prescaler 192-223 | algo_after_prescaler 384-415 | tcn bunch counter (on bits 11..0) |
| Frame 1 | algo_after_gtLogic 32-63 | algo_after_gtLogic 224-255 | algo_after_gtLogic 416-447 | algo_after_bxmask 32-63 | algo_after_bxmask 224-255 | algo_after_bxmask 416-447 | algo_after_prescaler 32-63 | algo_after_prescaler 224-255 | algo_after_prescaler 416-447 | mp7 tic bunch counter (on bits 11..0) |
| Frame 2 | algo_after_gtLogic 64-95 | algo_after_gtLogic 256-287 | algo_after_gtLogic 448-479 | algo_after_bxmask 64-95 | algo_after_bxmask 256-287 | algo_after_bxmask 448-479 | algo_after_prescaler 64-95 | algo_after_prescaler 256-287 | algo_after_prescaler 448-479 | tcn bunch counter for FDL (on bits 11..0) |
| Frame 3 | algo_after_gtLogic 96-127 | algo_after_gtLogic 288-319 | algo_after_gtLogic 480-511 | algo_after_bxmask 96-127 | algo_after_bxmask 288-319 | algo_after_bxmask 480-511 | algo_after_prescaler 96-127 | algo_after_prescaler 288-319 | algo_after_prescaler 480-511 | [coming soon for scouting: orbit counter 47..32 (on bits 15..0)] |
| Frame 4 | algo_after_gtLogic 128-159 | algo_after_gtLogic 320-351 | 32bit hash of menu name | algo_after_bxmask 128-159 | algo_after_bxmask 320-351 | spare | algo_after_prescaler 128-159 | algo_after_prescaler 320-351 | veto + finor [0] | [coming soon for scouting: orbit counter 31..0] |
| Frame 5 | algo_after_gtLogic 160-191 | algo_after_gtLogic 352-383 | 32bit hash of firmware uuid | algo_after_bxmask 160-191 | algo_after_bxmask 352-383 | spare | algo_after_prescaler 160-191 | algo_after_prescaler 352-383 | prescale_factor_index [1] | free |

[0]: In this field, the finor and veto information is stored (1 bit each): "00000000000000000000" & "00000000" & local_veto & "00000000" & local_finor

The local_finor & local_veto are the values from the local MP7 uGT module.

[1]: In this field, the 8 bit prescale factor index is stored: "000000000000000000000000" + prescale_factor_index.

Algorithm results:

- algo_after_gtLogic: algorithm result after applying the criteria from uGT algorithm expression
 - algo_after_bxmask: algorithm result after applying the mask of BX number in an orbit - in hardware, the mask is applied on the algo_after_gtLogic
 - algo_after_prescaler: algorithm result after applying the prescale factor - in hardware, prescaling is done after applying the BX in orbit mask.
- This is the final algorithm result, used to compute the finor (together with the veto masks)

Figure 18: Outputs from Global Trigger to AMC13

Appendix D:

Figure 19 shows the connections on Global Trigger patch panel for optical links.

| | | | | | | | | | |
|--|-------------|---------------------|---------------|--|--|-----------|-------------|---------------------|---------------|
| Fiber cabling 22.2.2022 | | | | | | | | | |
| UGT Patchpanel #1: | | | | | | | | | |
| for production crate | | | | | | | | | |
| MP0 | ES0 | MP0 | ExtCon00 | | | MP0 | ES0 | MP0 | ExtCon00 |
| MP1 | ES1 | MP1 | ExtCon01 | | | MP1 | ES1 | MP1 | ExtCon01 |
| MP2 | ES2 | MP2 | ExtCon02 | | | MP2 | ES2 | MP2 | ExtCon02 |
| MP3 | ES3 | MP3 | ExtCon03 | | | MP3 | ES3 | MP3 | ExtCon03 |
| MP7 slot1 & slot2 (modules 2 & 3) | | | | | | | | | |
| from uGMT | from deapex | from ExtCon0 boards | | | | from uGMT | from deapex | from ExtCon0 boards | |
| 16 | 16a | 16a | 200 Mod0 Ext0 | | | 16 | 16a | 16a | 200 Mod0 Ext0 |
| 17 | 17a | 17a | 200 Mod0 Ext1 | | | 17 | 17a | 17a | 200 Mod0 Ext1 |
| 18 | 18a | 18a | 200 Mod0 Ext2 | | | 18 | 18a | 18a | 200 Mod0 Ext2 |
| 19 | 19a | 19a | 200 Mod0 Ext3 | | | 19 | 19a | 19a | 200 Mod0 Ext3 |
| Note that UGT is marked by green chip & yellow stream card | | | | | | | | | |
| UGT Patchpanel #3: | | | | | | | | | |
| for test crate | | | | | | | | | |
| MP0 | ES0 | MP0 | ExtCon00 | | | MP0 | ES0 | MP0 | ExtCon00 |
| MP1 | ES1 | MP1 | ExtCon01 | | | MP1 | ES1 | MP1 | ExtCon01 |
| MP2 | ES2 | MP2 | ExtCon02 | | | MP2 | ES2 | MP2 | ExtCon02 |
| MP3 | ES3 | MP3 | ExtCon03 | | | MP3 | ES3 | MP3 | ExtCon03 |
| MP7 slot1 & slot2 (modules 2 & 3) | | | | | | | | | |
| from uGMT | from deapex | from ExtCon0 boards | | | | from uGMT | from deapex | from ExtCon0 boards | |
| 16 | 16a | 16a | 200 Mod0 Ext0 | | | 16 | 16a | 16a | 200 Mod0 Ext0 |
| 17 | 17a | 17a | 200 Mod0 Ext1 | | | 17 | 17a | 17a | 200 Mod0 Ext1 |
| 18 | 18a | 18a | 200 Mod0 Ext2 | | | 18 | 18a | 18a | 200 Mod0 Ext2 |
| 19 | 19a | 19a | 200 Mod0 Ext3 | | | 19 | 19a | 19a | 200 Mod0 Ext3 |
| Note that UGT is marked by green chip & yellow stream card | | | | | | | | | |
| MP7 slot3 & slot4 (modules 4 & 5) | | | | | | | | | |
| from uGMT | from deapex | from ExtCon0 boards | | | | from uGMT | from deapex | from ExtCon0 boards | |
| 20 | 20a | 20a | 200 Mod0 Ext0 | | | 20 | 20a | 20a | 200 Mod0 Ext0 |
| 21 | 21a | 21a | 200 Mod0 Ext1 | | | 21 | 21a | 21a | 200 Mod0 Ext1 |
| 22 | 22a | 22a | 200 Mod0 Ext2 | | | 22 | 22a | 22a | 200 Mod0 Ext2 |
| 23 | 23a | 23a | 200 Mod0 Ext3 | | | 23 | 23a | 23a | 200 Mod0 Ext3 |
| Note that UGT is marked by green chip & yellow stream card | | | | | | | | | |
| MP7 slot5 & slot6 (modules 6 & 7) | | | | | | | | | |
| from uGMT | from deapex | from ExtCon0 boards | | | | from uGMT | from deapex | from ExtCon0 boards | |
| 24 | 24a | 24a | 200 Mod0 Ext0 | | | 24 | 24a | 24a | 200 Mod0 Ext0 |
| 25 | 25a | 25a | 200 Mod0 Ext1 | | | 25 | 25a | 25a | 200 Mod0 Ext1 |
| 26 | 26a | 26a | 200 Mod0 Ext2 | | | 26 | 26a | 26a | 200 Mod0 Ext2 |
| 27 | 27a | 27a | 200 Mod0 Ext3 | | | 27 | 27a | 27a | 200 Mod0 Ext3 |
| Note that UGT is marked by green chip & yellow stream card | | | | | | | | | |
| Note that UGT is marked by green chip & yellow stream card | | | | | | | | | |

Figure 19: Global Trigger patch panel for optical link

List of Tables

| | | |
|----|---|----|
| 2 | Explanation of Listing 1 | 10 |
| 3 | Explanation of Listing 3 | 15 |
| 4 | Configuration of optical connections | 17 |
| 5 | Current lane mapping | 18 |
| 6 | Counters of Timer Counter Manager | 23 |
| 7 | Explanation of Listing 5 | 35 |
| 8 | η scale of calorimeter objects | 38 |
| 9 | φ scale of calorimeter objects | 38 |
| 10 | Definition of e/γ and tau isolation bits | 39 |
| 11 | η scale of muon objects | 43 |
| 12 | φ scale of muon objects | 43 |
| 13 | Definition of muon quality bits | 43 |
| 14 | Definition of muon isolation bits | 43 |
| 15 | Definition of muon impact parameter bits | 44 |
| 16 | LUT contents for isolation comparison | 47 |
| 17 | LUT contents for impact parameter comparison | 48 |
| 18 | LUT contents for quality comparison of muon objects | 49 |
| 19 | Muon charge correlation - Double Muon | 53 |
| 20 | Muon charge correlation - Triple Muon | 53 |
| 21 | Muon charge correlation - Quad Muon | 53 |
| 22 | Explanation of Listing 6 | 61 |
| 23 | Explanation of Listing 7 | 75 |
| 24 | μ FDL register map | 77 |
| 24 | μ FDL register map | 78 |
| 24 | μ FDL register map | 79 |

List of Figures

| | | |
|----|--|----|
| 1 | μ GT payload | 8 |
| 2 | System architecture overview | 13 |
| 3 | Memory subsystem | 19 |
| 4 | start of the bunch crossing number with the first bcrs_d | 23 |
| 5 | normal operation of the bunch crossing number | 23 |
| 6 | set of the software register err_det when bc_res_d is not asserted correctly | 24 |
| 7 | reset of the software register err_det when err_det_reset_event toggles | 24 |
| 8 | μ GTL firmware | 30 |
| 9 | VHDL file generation by VHDL Producer | 34 |
| 10 | Scheme of μ GTL pipeline structure | 36 |
| 11 | Setting the limits for "window"-comparators for φ | 46 |
| 12 | VHDL structure of cuts for correlation conditions | 64 |
| 13 | Conversion of calorimeter η and φ to muon scales | 68 |
| 14 | μ FDL firmware | 70 |
| 15 | μ FDL pipeline | 71 |
| 16 | Configuration of GTHs | 91 |
| 17 | Optical link inputs to Global Trigger | 92 |
| 18 | Outputs from Global Trigger to AMC13 | 92 |
| 19 | Global Trigger patch panel for optical link | 93 |

References

- [1] MP7 documentation:
<http://www.hep.ph.ic.ac.uk/mp7> 1
- [2] MP7 firmware repository:
<https://gitlab.cern.ch/cms-cactus/firmware/mp7> 1
- [3] Trigger Menu Editor repository:
<https://github.com/cms-l1-globaltrigger/tm-editor> 4.3
- [4] VHDL Producer repository:
<https://github.com/cms-l1-globaltrigger/tm-vhdlproducer> 4.3
- [5] Calo-layer2 and Global Muon Trigger interface documentation:
https://raw.githubusercontent.com/cms-l1-globaltrigger/mp7_ugt_legacy/master/doc/scales_inputs_2_ugt/pdf/scales_inputs_2_ugt.pdf 4, 4.2
- [6] Xilinx Series 7 Transceivers (GTHs) documentation:
https://www.xilinx.com/support/documentation/user_guides/ug476_7Series_Transceivers.pdf 9