ERECTOR NOTE:
1"NSx6" WIDTH GROUT @ PRECAST BEARING POINT ONLY
CO-ORDINATE BEARING POINT LOCATION WITH
PRECAST MANUFACTURER.

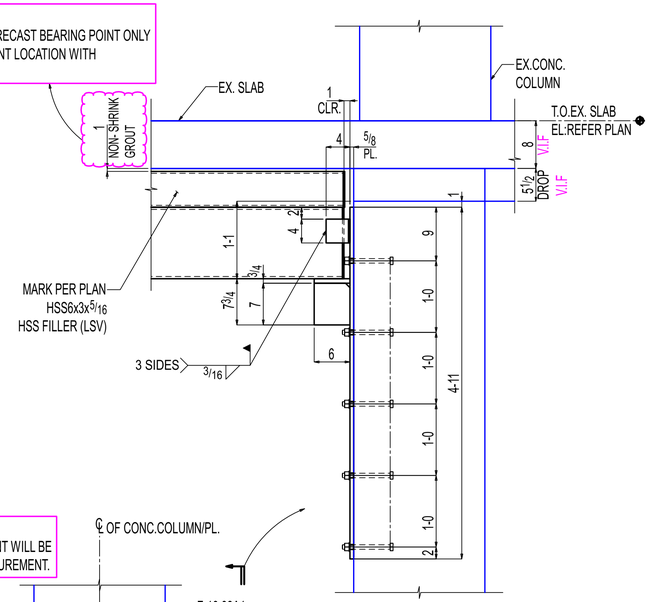

G-G

E-10.00A
(REF:1/S316)

OTHERS NOT SHOWN FOR CLARITY

NOTE:
FILLER SIZE AND REQUIREMENT WILL BE
FINALIZED AFTER FIELD MEASUREMENT.

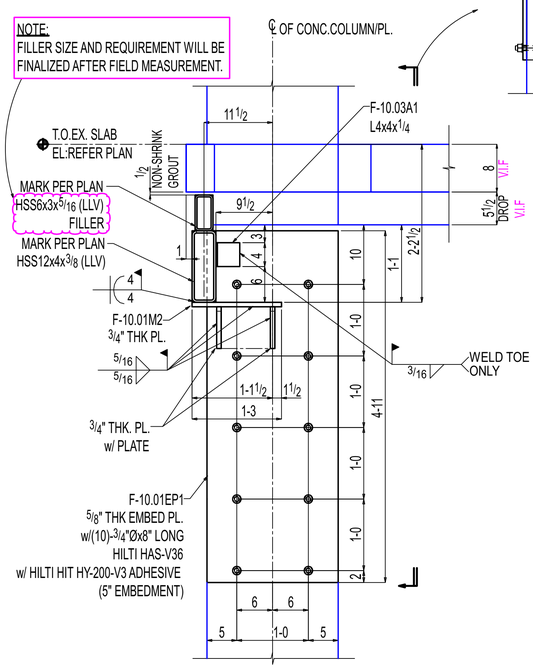

G-G

E-10.00A
(REF:1/S316)

OTHERS NOT SHOWN FOR CLARITY

SHOP / ERECTOR NOTE:
LOCATE EXISTING REBAR PRIOR TO FABRICATION OF PLATE.
DO NOT DRILL THROUGH REBAR.

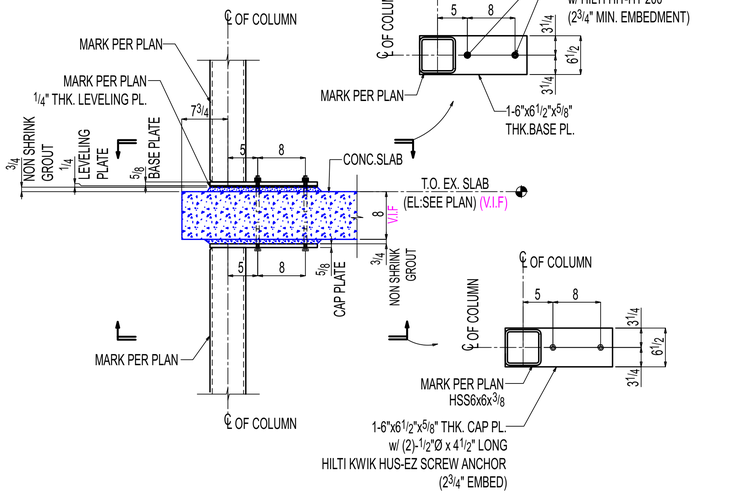

H-H

E-10.00
(REF:1/S317)

OTHERS NOT SHOWN FOR CLARITY

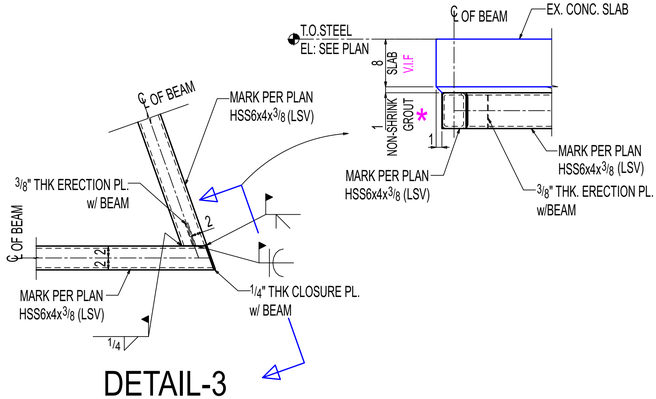

DETAIL-3

E-10.00

OTHERS NOT SHOWN FOR CLARITY

* - ERECTOR NOTE:
PROVIDE 1" NON-SHRINK GROUT x 12" LONG
CENTERED BENEATH AT PRECAST
ATTACHMENT POINTS.

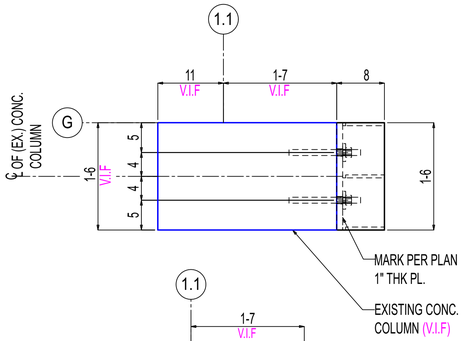

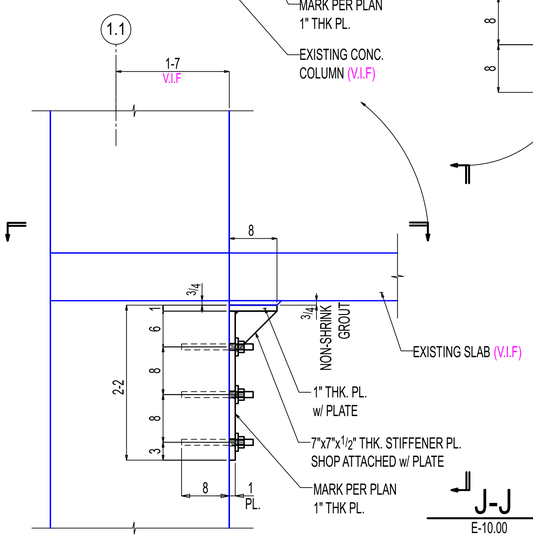

J-J

E-10.00
(REF:4,4A & 4B/S317)

OTHERS NOT SHOWN FOR CLARITY

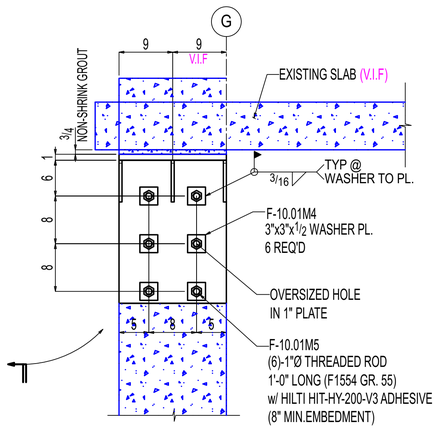

NOTE:
1. INSTALL WASHER PLATE SO TOP OF THREADED ROD IS IN BEARING WITH WASHER PRIOR TO WELDING AND NON-SHRINK GROUT PLACEMENT.
2. AFTER THREADED ROD IS INSERTED, PRESSURE INJECT DURAL 452LV OR APPROVED ALTERNATIVE FULL WIDTH OF COLUMN.

General Notes

*Structural steel shall conform to ASTM-A992.
*Structural SQR/RND.tubing conform to ASTM A500 Grade C
*Pipe shall conform to ASTM A53, Grade B.
*Channels, Angles and plates shall conform to A36.
*All bolts shall be 3/4" High strength in accordance with ASTM A325 (UNO)
*Welding Electrodes for Carbon steel :E70xx

# of Copies	Revision/ Issue	Destination	Date
4	0	For Construction	11-14-2025
3	C	For Re-Approval	10-24-2025
2	B	For Re-Approval	09-19-2025
1	A	For Approval	06-23-2025

IRON FABRICATION SERVICES, LLC.

3029 M. Street, NW, Suite 202
Washington, DC 20007
Tel: 202-800-5599
Fax: 202-478-0303

Project Name and Address
MARYLAND AVENUE

Location: **1250 MARYLAND AVENUE SW WASHINGTON, DC 20024**

Contractor:
BALFOUR BEATTY

Approved for Fabrication by:	Signature

Contract # **224009** | Drawing # **E-10.03**

Contract Item: **LEVEL-04 SLAB EXTENSION**

Ref: **SOW-10: 3,4,5&6 / S307**

Date **01/ 20/ 2025**

Scale VARIES

Drawing Title: **SOW #10 LEVEL-04 NEW SLAB EXTENSION SUPPORT SECTIONS**