
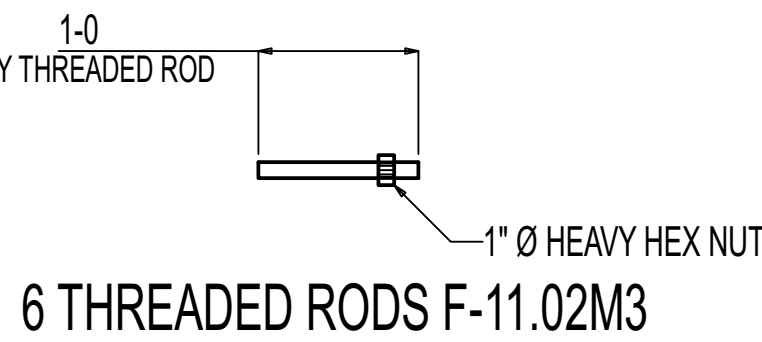
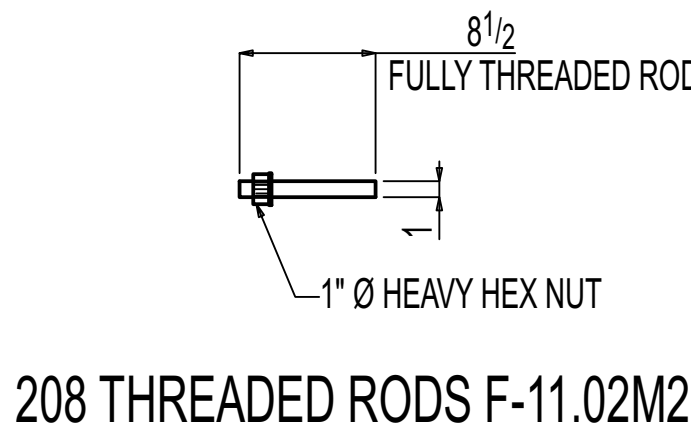
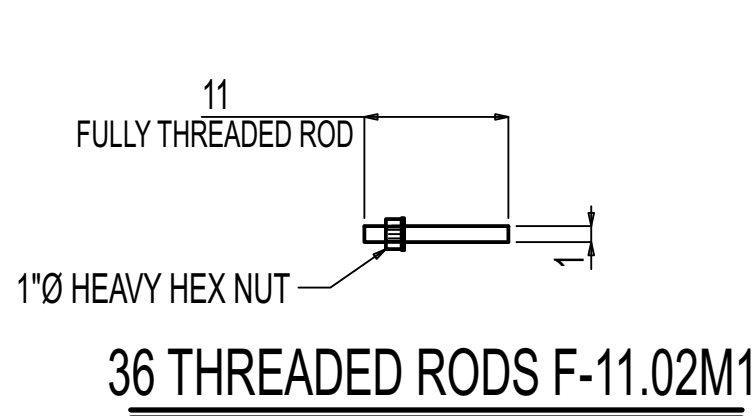
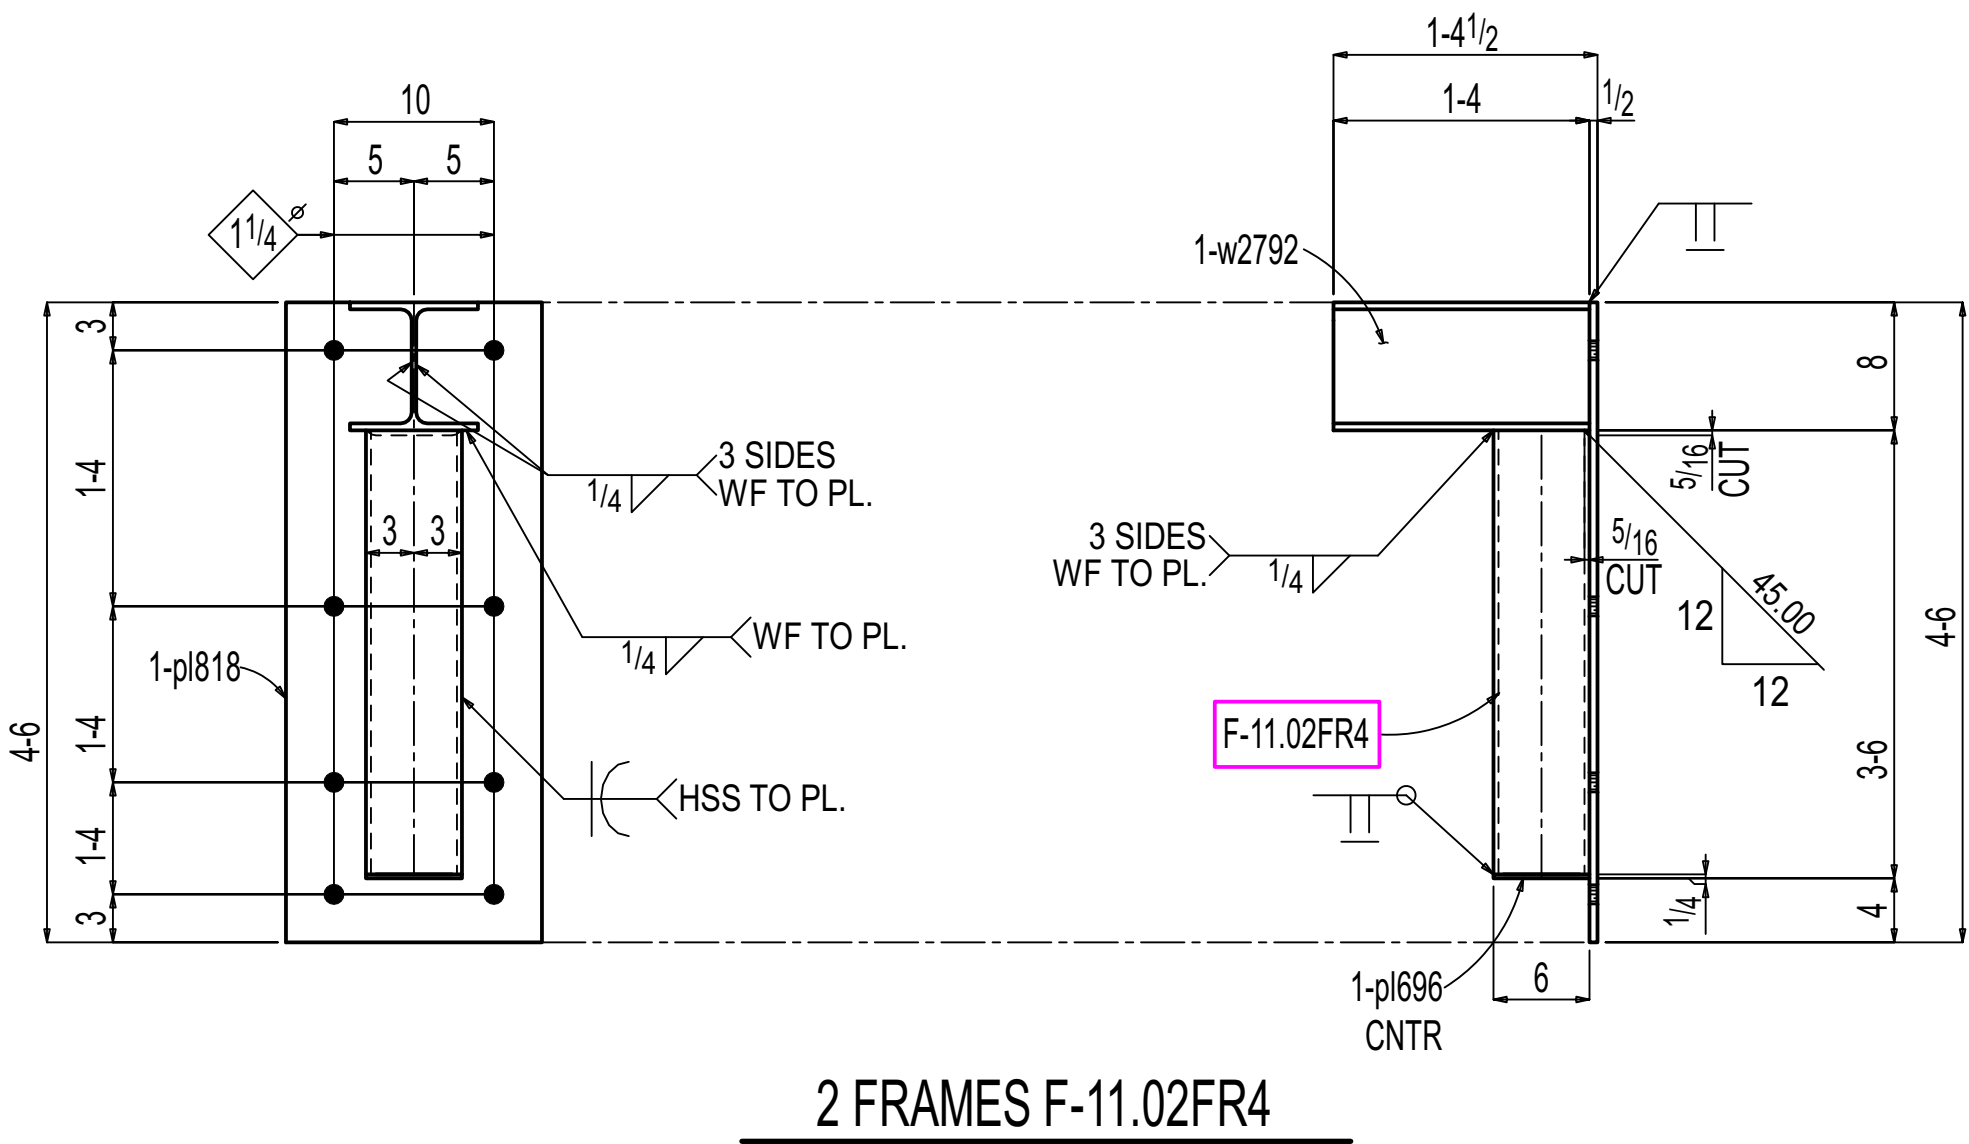
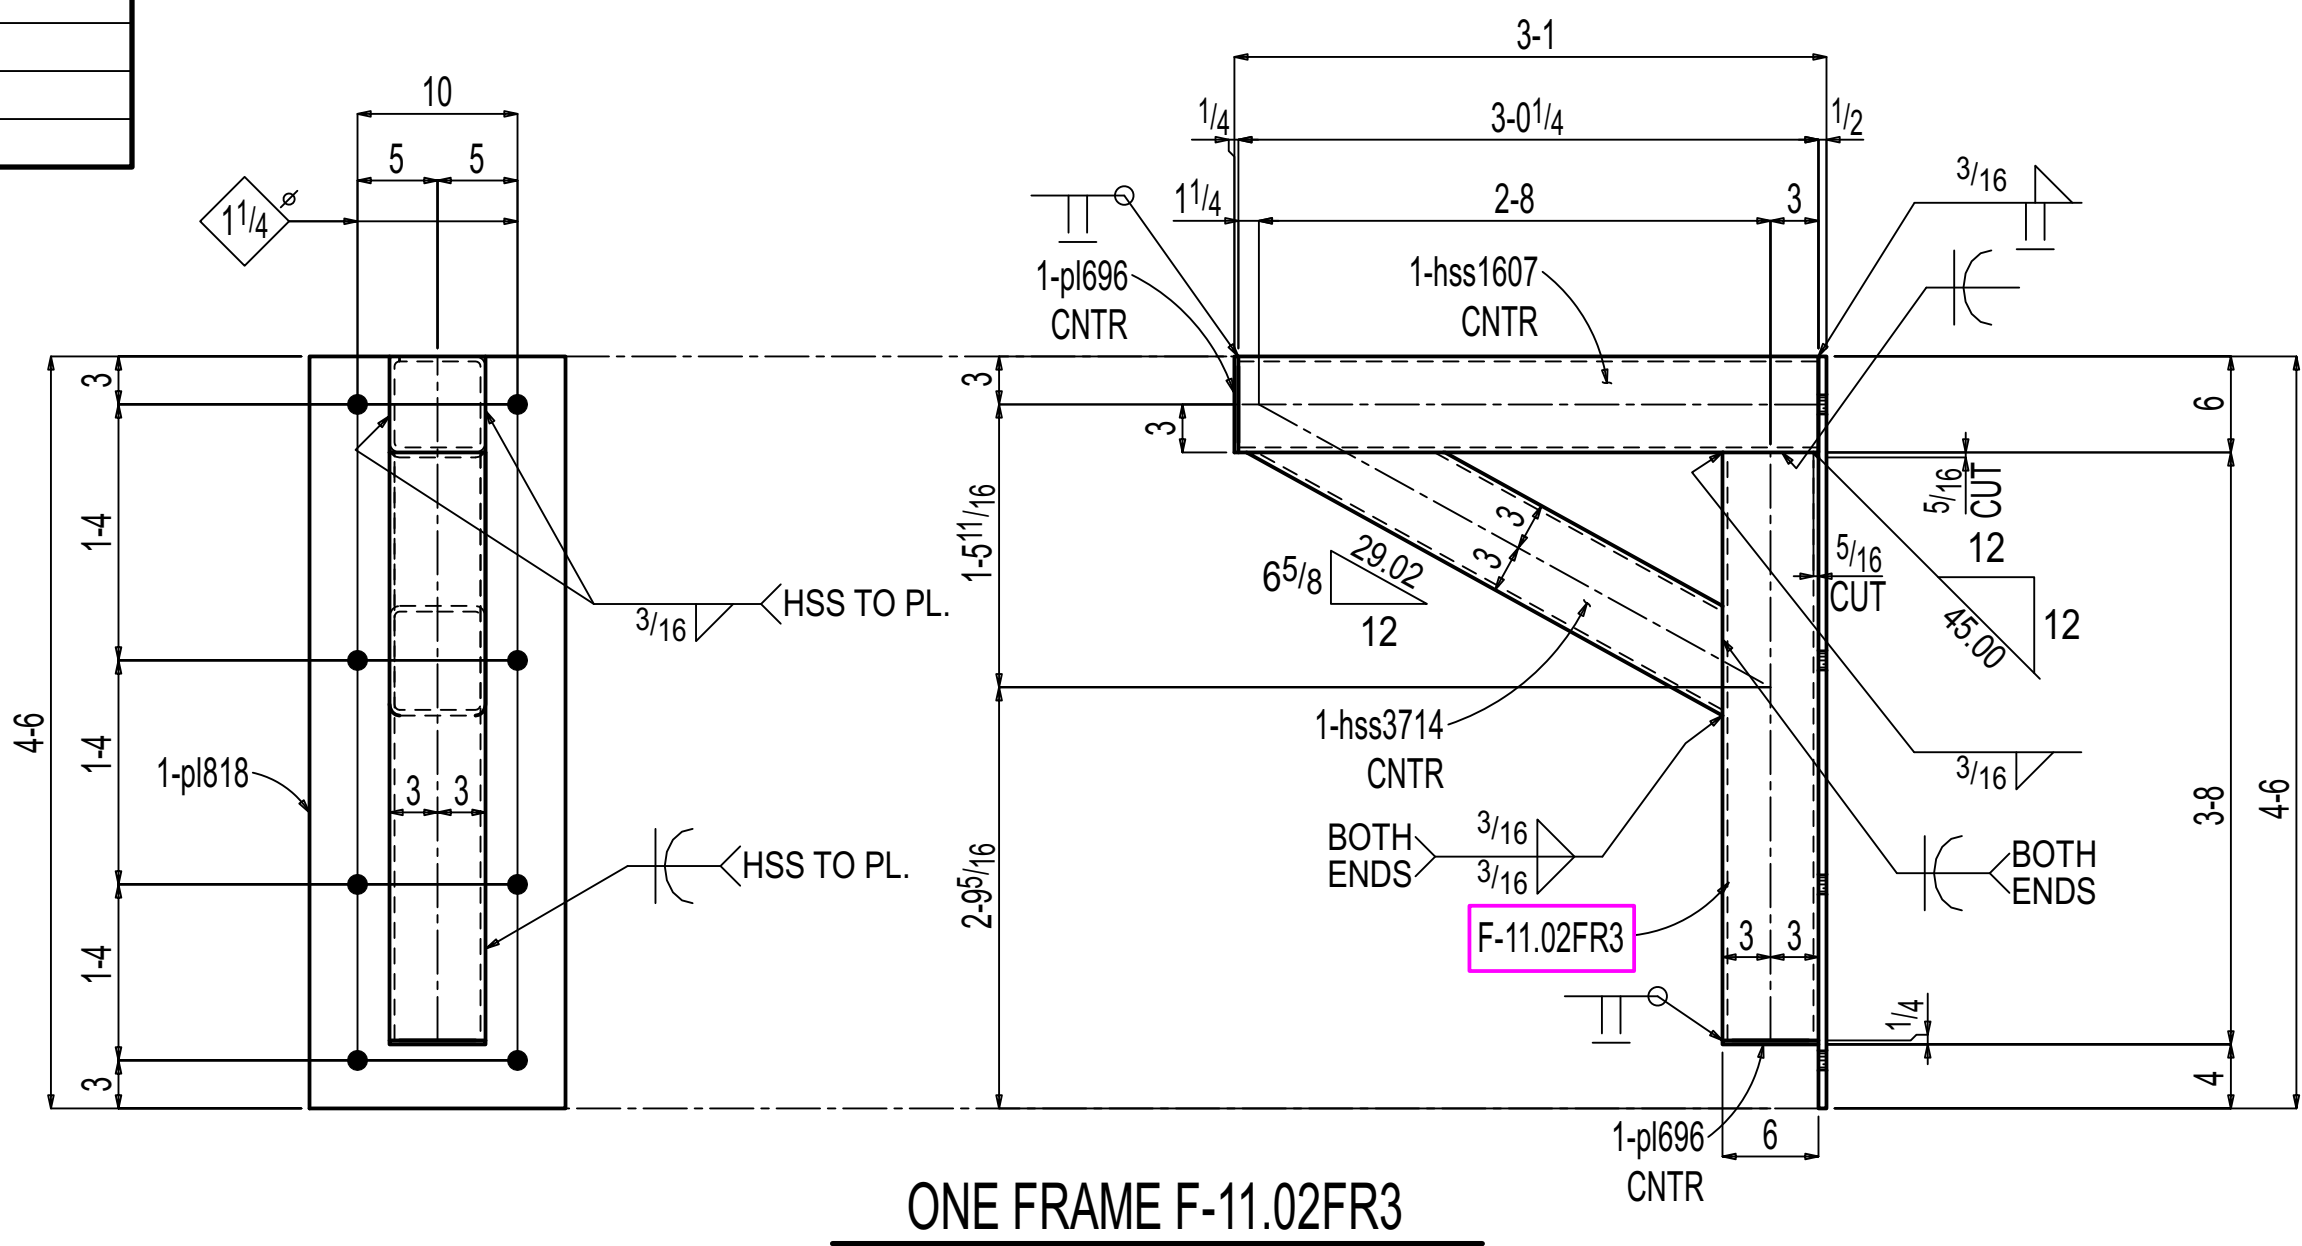
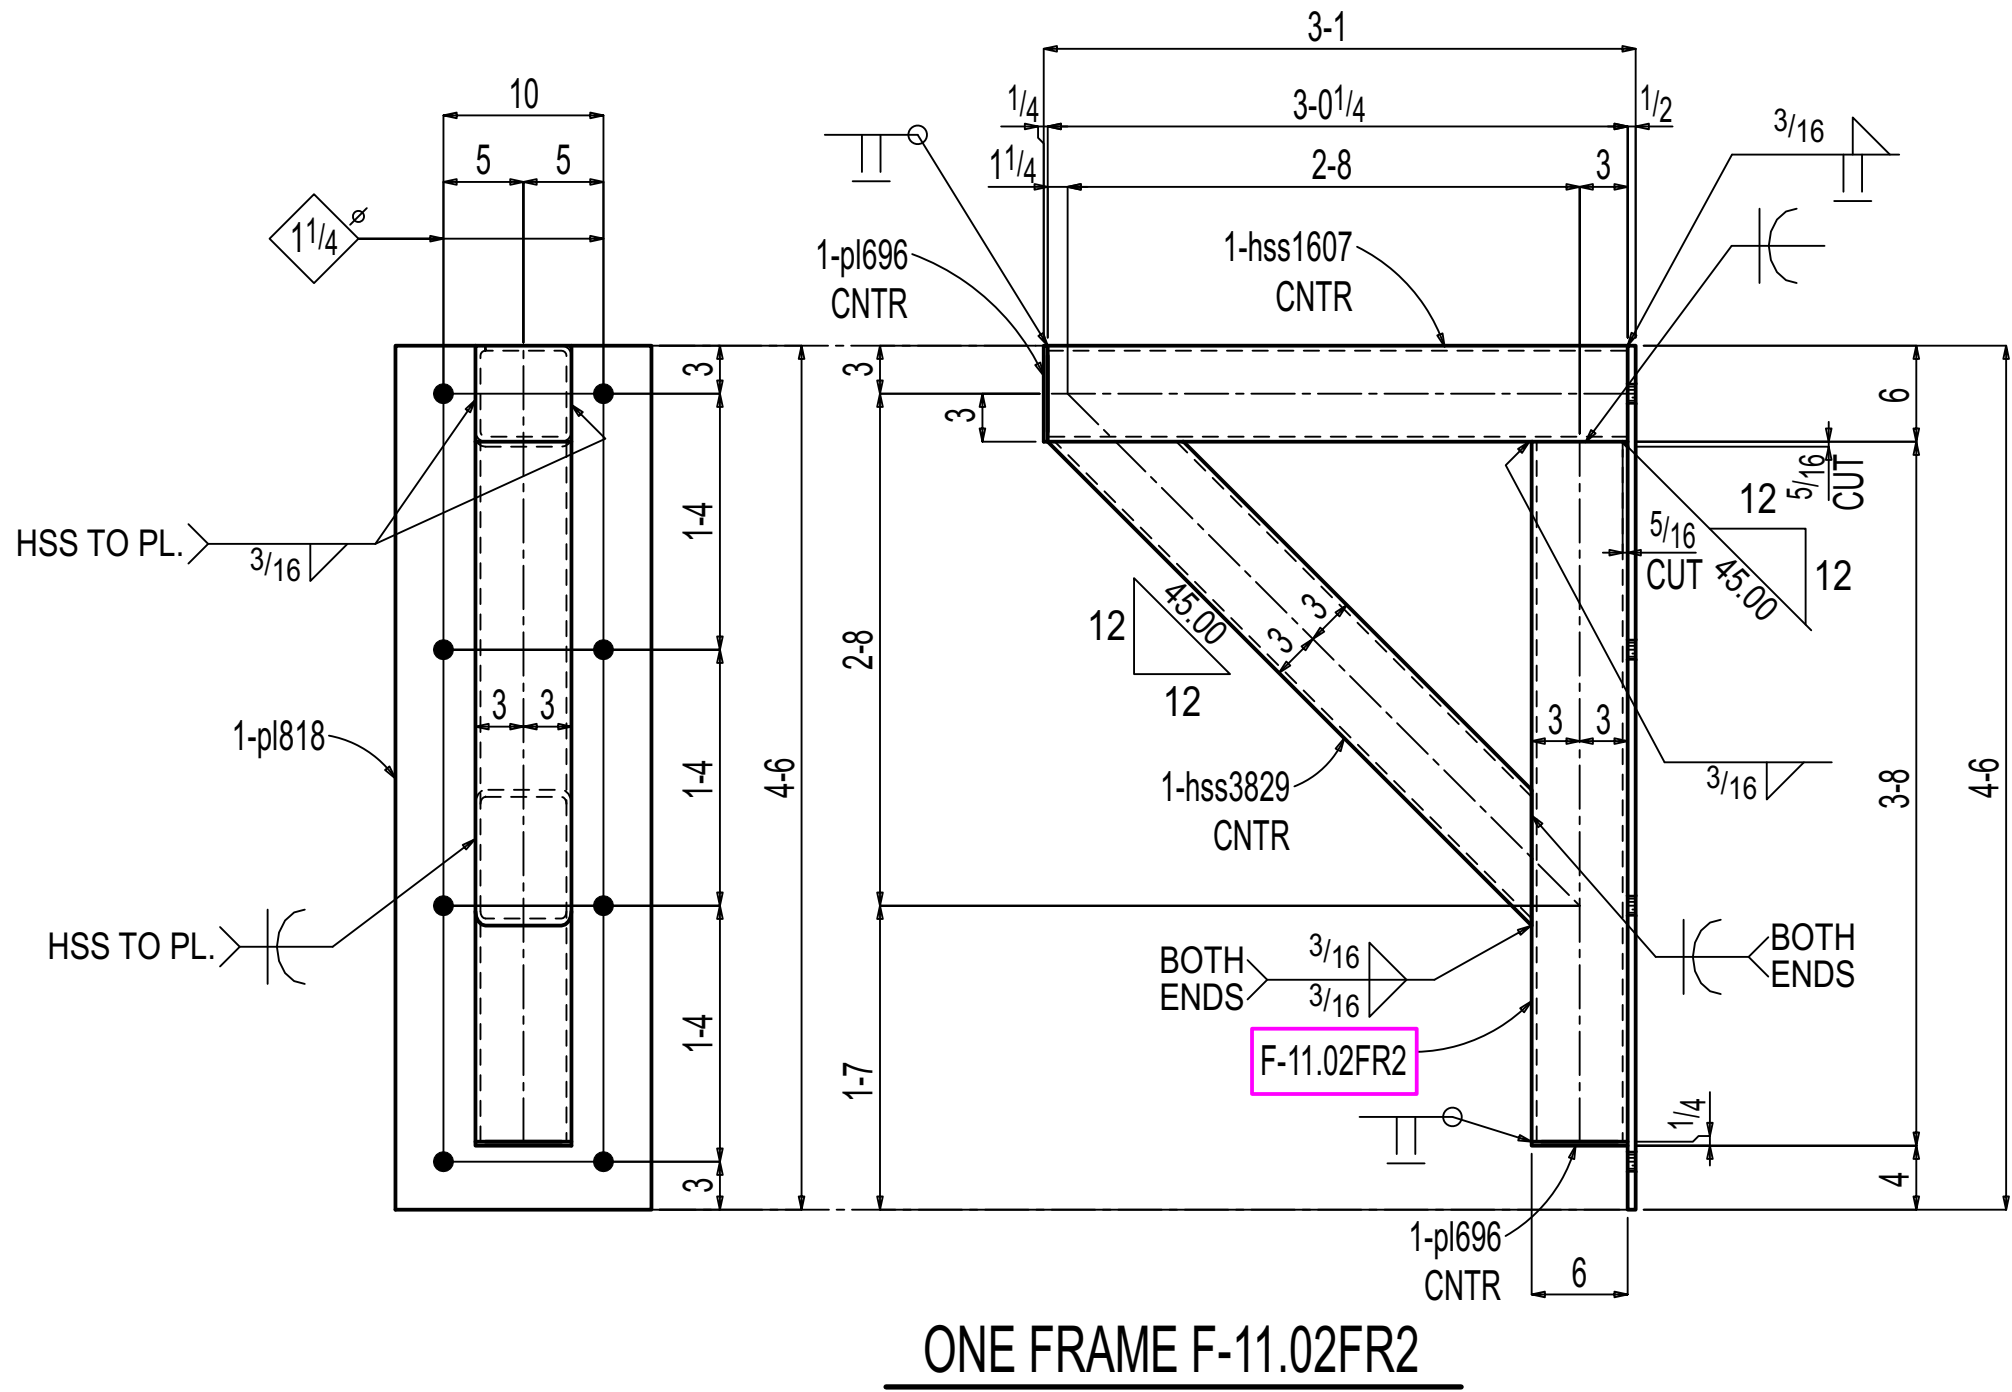


BILL OF MATERIAL							
LINE #	QTY	PC	MARK	DESCRIPTION	LENGTH	WEIGHT	ADVANCE
	TOTAL					TOTAL	MILL #
	2	F-11.02FR1		FRAME		505	
	2	F-11.02FR1		HSS6x2x $\frac{3}{16}$	4' $\frac{7}{8}$ "	A500C	138
	2	hss3773		HSS6x2x $\frac{3}{16}$	3' $\frac{6}{8}$ "	A500C	106
	2	hss3675		HSS6x2x $\frac{3}{16}$	3' $\frac{0}{4}$ "	A500C	90
	2	p1343		PL $\frac{1}{2}$ x2x9	5' 6"	A36	168
	4	p13040		PL $\frac{1}{4}$ x2	0' 6"	A36	3
	ONE	F-11.02FR2		FRAME		366	
	1	F-11.02FR2		HSS6x6x $\frac{3}{16}$	3' $\frac{7}{8}$ "	A500C	85
	1	hss3829		HSS6x6x $\frac{3}{16}$	3' $\frac{6}{8}$ "	A500C	83
	1	hss1607		HSS6x6x $\frac{3}{16}$	3' $\frac{0}{4}$ "	A500C	70
	1	p1818		PL $\frac{1}{2}$ x16	4' 6"	A36	123
	2	p1696		PL $\frac{1}{4}$ x6	0' 6"	A36	5
	ONE	F-11.02FR3		FRAME		349	
	1	F-11.02FR3		HSS6x6x $\frac{3}{16}$	3' $\frac{7}{8}$ "	A500C	85
	1	hss1607		HSS6x6x $\frac{3}{16}$	3' $\frac{0}{4}$ "	A500C	70
	1	hss3714		HSS6x6x $\frac{3}{16}$	2' 10"	A500C	66
	1	p1818		PL $\frac{1}{2}$ x16	4' 6"	A36	123
	2	p1696		PL $\frac{1}{4}$ x6	0' 6"	A36	5
	2	F-11.02FR4		FRAME		495	
	2	F-11.02FR4		HSS6x6x $\frac{3}{16}$	3' $\frac{5}{8}$ "	A500C	162
	2	w2792		WB6x31	1' 4"	A992	83
	2	p1818		PL $\frac{1}{2}$ x16	4' 6"	A36	245
	2	p1696		PL $\frac{1}{4}$ x6	0' 6"	A36	5
	36	F-11.02M1		THREADED ROD		88	
	36	F-11.02M1		1" $\emptyset$ THREADED ROD	0' 11"	F1554 GR. 55	88
				w/ HILTI HIT HY-200 V3		(8" EMBEDMENT)	
				ADHESIVE			
	36			1 NUT		HHNT A563	
	36			1 WASHER		HD F436	
	208	F-11.02M2		THREADED ROD		394	
	208	F-11.02M2		1" $\emptyset$ THREADED ROD	0' $\frac{8}{2}$ "	F1554 GR. 55	394
				w/ HILTI HIT HY-200 V3		(6" EMBEDMENT)	
				ADHESIVE			
	208			1 NUT		HHNT A563	
	208			1 WASHER		HD F436	
	6	F-11.02M3		THREADED ROD		16	
	6	F-11.02M3		1" $\emptyset$ THREADED ROD	1' 0"	F1554 GR. 55	16
				w/ HILTI HIT HY-200 V3		(8" EMBEDMENT)	
				ADHESIVE			
				FIELD BOLTS			
	6			1 NUT		HHNT A563	

Total weight : 2214

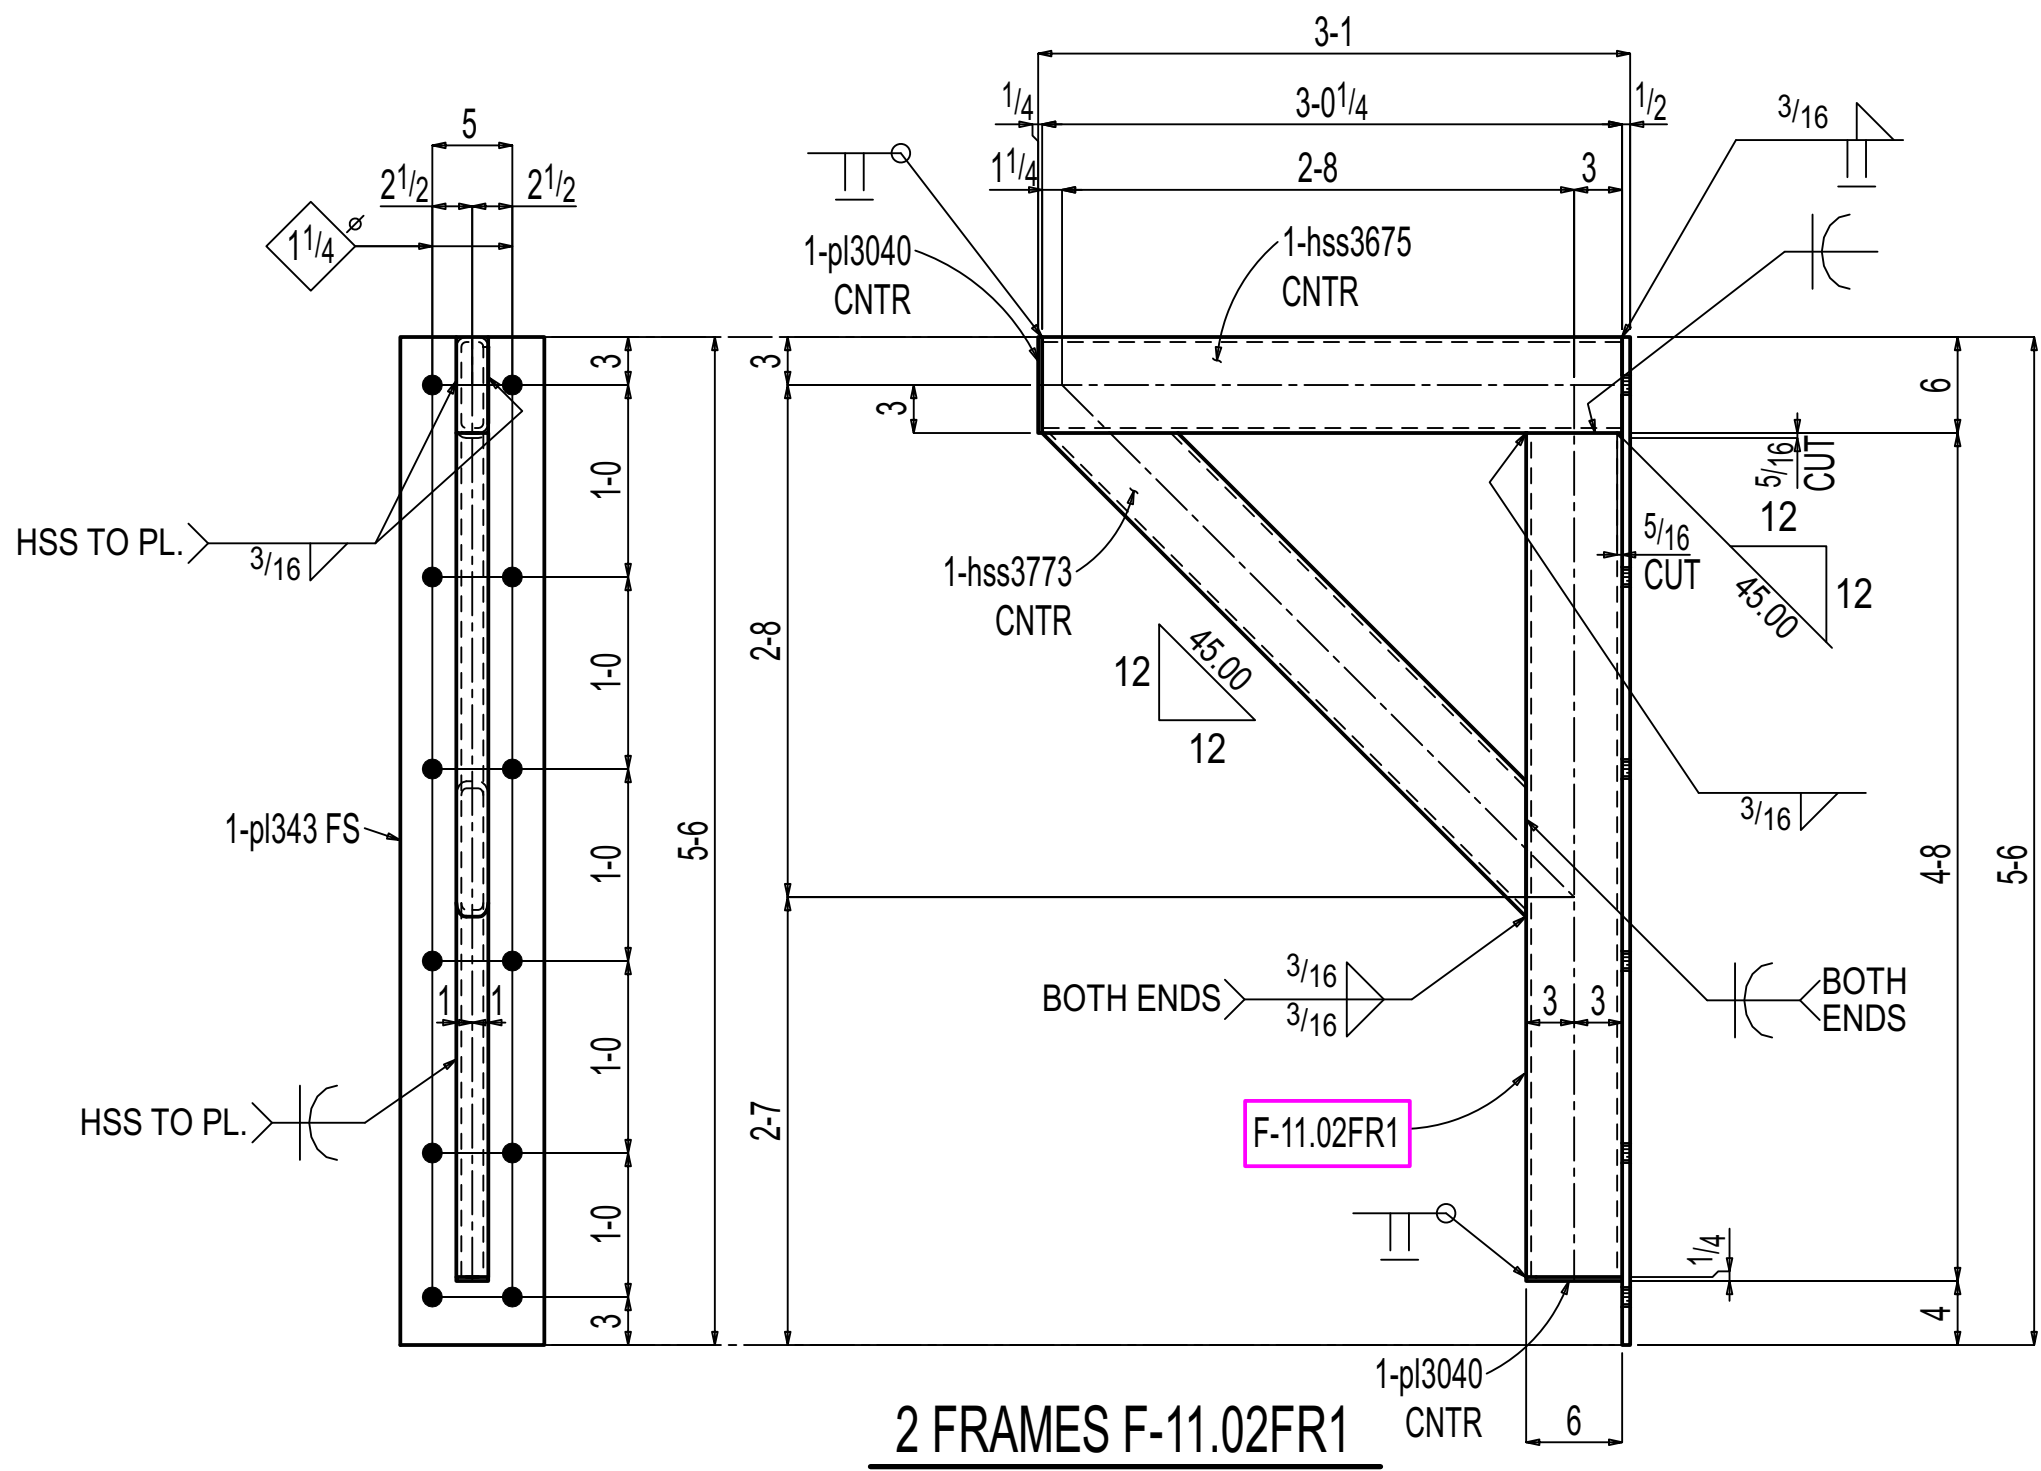

PAINT :NO PAINT
PREPARATION :SSPC-SP3

General Notes			
*Structural steel shall conform to ASTM-A992.			
*Structural SQR/RND,tubing conform to ASTM A500 Grade C			
*Pipe shall conform to ASTM A53, Grade B.			
*Channels, Angles and plates shall conform to A36.			
*All bolts shall be $\frac{3}{4}$ " High strength in accordance with ASTM A325 (UNO)			
*Welding Electrodes for Carbon steel :E70xx			
# of Copies	Revision/ Issue	Destination	Date
5	0	For Fabrication	11-14-2025
4	D	For Re-Approval	10-24-2025
3	C	For Re-Approval	09-19-2025
2	B	For Re-Approval	06-23-2025
1	A	For Approval	02-25-2025

IRON FABRICATION SERVICES, LLC.

3029 M. Street, NW, Suite 202
Washington, DC 20007
Tel: 202-800-5599
Fax: 202-478-0303

Project Name and Address
MARYLAND AVENUE

Location: **1250 MARYLAND AVENUE SW
WASHINGTON, DC 20024**

Contractor:
BALFOUR BEATTY

Approved for Fabrication by: _____
Signature

Contract # **224009** Drawing # **F-11.02**
Contract Item: **FRAME & THREADED ROD**

Ref:
SOW - 11: E-11.00 - E-11.02

Date **01/23/2025** Drawing Title: **FRAME DETAIL**
Scale **VARIES**