




Silicone Sealant

6.5 FL. oz. Nozzle-Top Can, Clear

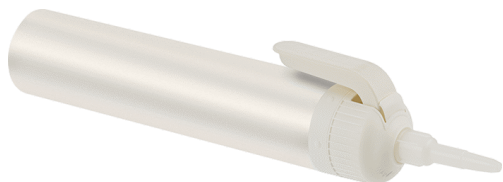

\$31.56 Each
75075A68

Type	Sealant
Application	Non-Sagging
Formulation	Silicone
Container	
Net Weight	6.5 oz.
Type	Nozzle-Top Can
Begins to Harden	60 min.
Reaches Full Strength	24 hrs.
Elongation	400%
Joint Compression/ Expansion Tolerance	-25% to 25%
Tensile Strength	250 psi
Hardness	Soft (Durometer 21A)
Mixing Required	No
Temperature Range	-70° to 400° F
Paintable	No
For Use Outdoors	Yes
For Joining	Metal Metal to Glass Glass
Specifications Met	Fed. Spec. TT-S-001543A, Fed. Spec. TT-S-00230C, MIL-A-46106 Type I
For Use On	Aluminum, Stainless Steel, Steel, Titanium, Cast Iron, Glass
Clarity	Clear
Color	Clear
Cannot Be Sold To	Outside United States
Additional Specifications	SDS
RoHS	RoHS 3 (2015/863/EU) Compliant
REACH	Not Compliant
DFARS	Specialty Metals COTS-Exempt
Country of Origin	United States
USMCA Qualifying	Yes
Schedule B	321410.0010
ECCN	EAR99

Made from silicone, these sealants are RTV (room-temperature vulcanizing). They're non-sagging, so they won't drip from vertical and overhead surfaces.

Elongation and joint compression/expansion tolerance indicate flexibility—the higher the values are, the more joint movement sealants can sustain. Sealants that are good for joining dissimilar materials also work well in environments with wide temperature fluctuation.

Sealants that cannot be sold outside the United States are restricted due to chemical regulations and/or product labeling requirements.