AUTHORED SYNTHETIC QA — NOT FOR CONSTRUCTION

09 91 23 — PAINTING

Patch small holes, sand imperfections and spot prime repairs.

Apply two finish coats of specified paint.

Protect adjacent work. Maintain drying time recommended by manufacturer.

Owner shall approve colors before procurement.

Do not assume field quantities or wall heights from this specification.

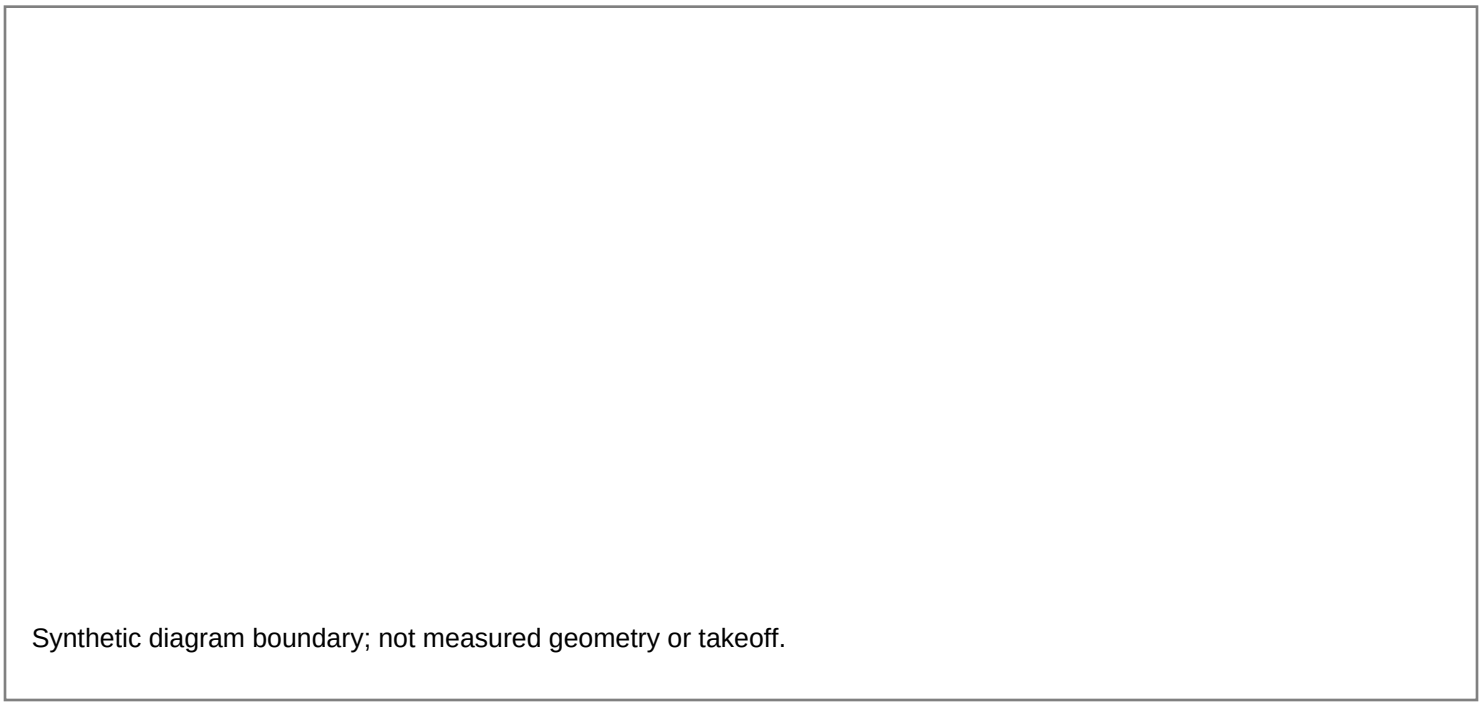

Synthetic diagram boundary; not measured geometry or takeoff.

AUTHORED SYNTHETIC QA — NOT FOR CONSTRUCTION

09 72 00 — WALLCOVERING

Verify substrate moisture against manufacturer limits before installation.

Submit layout and seam pattern for review before installing WC-1.

Use manufacturer-approved adhesive; retain lot and pattern records.

Substrate replacement is excluded pending separate written authorization.

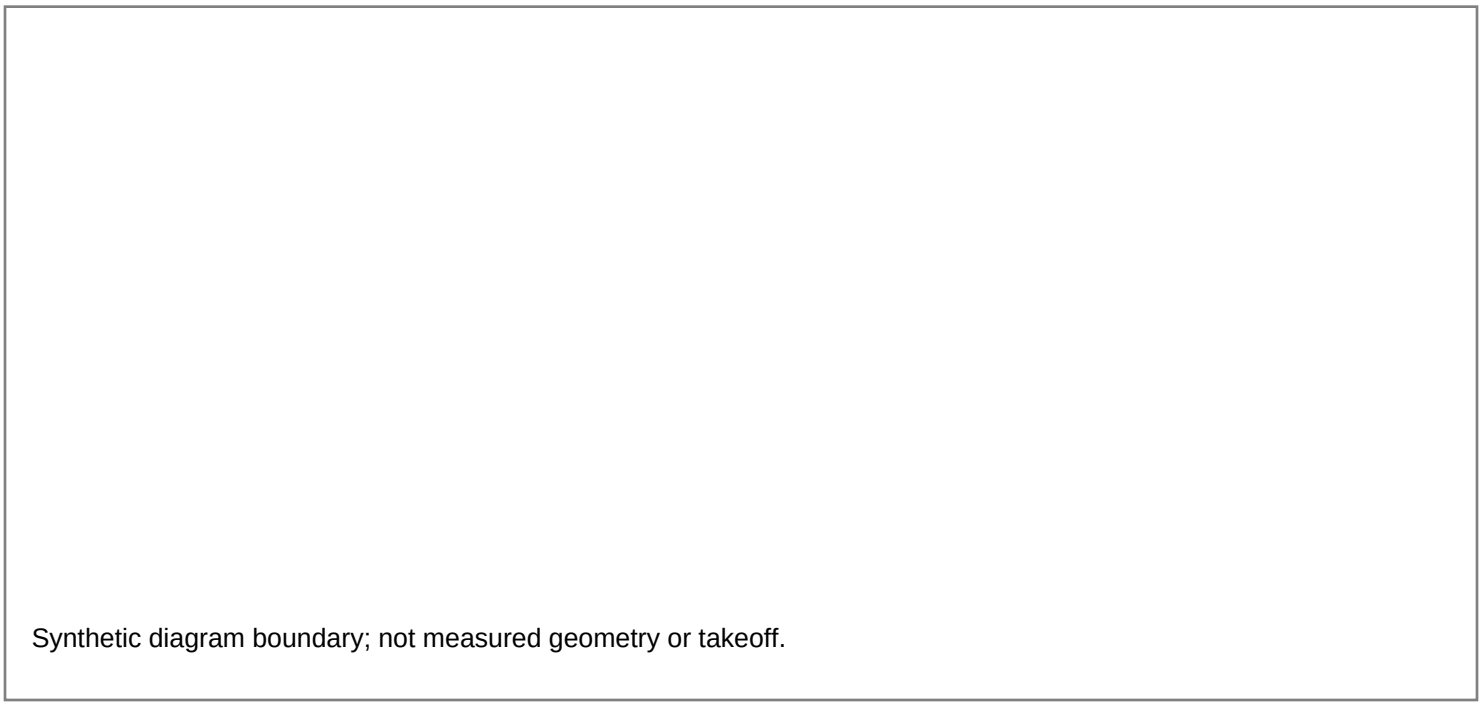

Synthetic diagram boundary; not measured geometry or takeoff.