

REPUBLIC OF CHINA

Civil Aviation Administration
Air Traffic Services Division
No. 340 Dunhua N.Road,
Taipei, 105, Taiwan

Tel: +886-2-2349 6118
Fax: +886-2-2349 6122
AFTN: RCTPYAYX
E-Mail: ais@mail.caa.gov.tw

AIRAC

AIRAC AIP AMDT 03/26
25 JUN 2026

生效日期
EFFECTIVE DATE
06 AUG 2026

AIP

Summary

GEN – Differences, Aeronautical charts, Meteorological service.

ENR – ATS Airspace, Significant points, ATS Routes.

AD – Aerodromes.

重要資訊及變更:

Signification information and changes:

自2026年8月6日0000世界標準時間起

With effect from 6 AUG 2026, 0000 UTC

GEN 3.5	修訂氣象觀測及報告表格內容。	The Table of Meteorological Observations and Reports is updated.
ENR 5.2	四空域變更為四空域 (A)及四空域 (B)。	Area Four is revised as Area Four (A) and Area Four (B).
AD 2 RCFG	更新磁差，配合修訂機場圖。	Magnetic variation is updated. ADC is revised accordingly.
AD 2 RCKU	修訂氣象輔助裝備資訊。	Information on Meteorological Supplementary Equipment is updated.
AD 2 RCMQ	1. 修訂氣象輔助裝備資訊。 2. 修訂航管監視最低高度圖。	1. Information on Meteorological Supplementary Equipment is updated. 2. ATCSMAC is revised.
AD 2 RCMT	更新磁差及跑道磁方位，配合修訂相關航圖。	Magnetic variation and RWY magnetic bearings are updated. Related Charts are revised accordingly.
AD 2 RCNN	1. 修訂氣象輔助裝備資訊。 2. 刪除標準滑行路徑資訊 3. 修訂機場圖。	1. Information on Meteorological Supplementary Equipment is updated. 2. Information on Standard Taxiing Routes is deleted. 3. ADC is revised.
AD 2 RCQC	1. 修訂氣象輔助裝備資訊。 2. 修訂航管監視最低高度圖。	1. Information on Meteorological Supplementary Equipment is updated. 2. ATCSMAC is revised.
AD 2 RCYU	修訂氣象輔助裝備資訊。	Information on Meteorological Supplementary Equipment is updated.

自2026年8月6日2230世界標準時間起

With effect from 6 AUG 2026, 2230 UTC

AD 2 RCKH	1. 撤除515停機位。 2. 啟用快速出口滑行道D、F。 3. 現有滑行道更名為B、C、E、G、H、J。 4. 啟用C、E、G、H、J、S滑行道中心線燈。 5. 更新熱點資訊。 6. 配合修訂機場圖。	1. Stand 515 is withdrawn. 2. New rapid exit TWY D, F are installed. 3. Existing TWY are re-designated as B, C, E, G, H, J. 4. TWY C, E, G, H, J, S centerline lights are installed. 5. Hot spots are updated. 6. ADC is revised accordingly.
-----------	--	--

請於本次飛航指南修訂生效日期再更換後附各頁

Insert or replace respectively the attached pages with effective date.

取消頁 page to be destroyed		換入頁 page to be inserted	
GEN 0.2 - 1	14 MAY 2026	GEN 0.2 - 1	06 AUG 2026
GEN 0.4 - 1	14 MAY 2026	GEN 0.4 - 1	06 AUG 2026
GEN 0.4 - 2	14 MAY 2026	GEN 0.4 - 2	06 AUG 2026
GEN 0.4 - 3	14 MAY 2026	GEN 0.4 - 3	06 AUG 2026
GEN 0.4 - 4	14 MAY 2026	GEN 0.4 - 4	06 AUG 2026
GEN 0.4 - 5	14 MAY 2026	GEN 0.4 - 5	06 AUG 2026
GEN 0.4 - 6	14 MAY 2026	GEN 0.4 - 6	06 AUG 2026
GEN 0.4 - 7	14 MAY 2026	GEN 0.4 - 7	06 AUG 2026
GEN 0.4 - 8	14 MAY 2026	GEN 0.4 - 8	06 AUG 2026
GEN 0.4 - 9	14 MAY 2026	GEN 0.4 - 9	06 AUG 2026
GEN 0.4 - 10	14 MAY 2026	GEN 0.4 - 10	06 AUG 2026
GEN 0.6 - 4	10 JUL 2025	GEN 0.6 - 4	06 AUG 2026
GEN 0.6 - 5	14 MAY 2026	GEN 0.6 - 5	06 AUG 2026
GEN 2.2 - 9	25 DEC 2025	GEN 2.2 - 9	06 AUG 2026
GEN 2.2 - 12	22 MAR 2024	GEN 2.2 - 12	06 AUG 2026
GEN 2.2 - 13	25 DEC 2025	GEN 2.2 - 13	06 AUG 2026
GEN 2.2 - 14	15 MAY 2025	GEN 2.2 - 14	06 AUG 2026
GEN 2.2 - 15	25 DEC 2025	GEN 2.2 - 15	06 AUG 2026
GEN 2.2 - 16	15 MAY 2025	GEN 2.2 - 16	06 AUG 2026
GEN 2.2 - 17	25 DEC 2025	GEN 2.2 - 17	06 AUG 2026
GEN 2.2 - 18	25 DEC 2025	GEN 2.2 - 18	06 AUG 2026
GEN 2.2 - 19	15 MAY 2025	GEN 2.2 - 19	06 AUG 2026
GEN 2.2 - 20	25 DEC 2025	GEN 2.2 - 20	06 AUG 2026
GEN 2.2 - 21	15 MAY 2025	GEN 2.2 - 21	06 AUG 2026
GEN 2.2 - 22	25 DEC 2025	GEN 2.2 - 22	06 AUG 2026
GEN 2.2 - 23	15 MAY 2025	GEN 2.2 - 23	06 AUG 2026
GEN 2.2 - 24	15 MAY 2025	GEN 2.2 - 24	06 AUG 2026
GEN 2.2 - 25	25 DEC 2025	GEN 2.2 - 25	06 AUG 2026
GEN 2.2 - 26	15 MAY 2025	GEN 2.2 - 26	06 AUG 2026
GEN 2.2 - 27	25 DEC 2025	GEN 2.2 - 27	06 AUG 2026
GEN 2.2 - 28	25 DEC 2025	GEN 2.2 - 28	06 AUG 2026
GEN 2.2 - 29	25 DEC 2025	GEN 2.2 - 29	06 AUG 2026
GEN 2.2 - 30	25 DEC 2025	GEN 2.2 - 30	06 AUG 2026
GEN 2.2 - 31	15 MAY 2025	GEN 2.2 - 31	06 AUG 2026
GEN 2.2 - 32	15 MAY 2025	GEN 2.2 - 32	06 AUG 2026
GEN 2.2 - 33	15 MAY 2025	GEN 2.2 - 33	06 AUG 2026
GEN 2.2 - 34	25 DEC 2025	GEN 2.2 - 34	06 AUG 2026

取消頁 page to be destroyed		換入頁 page to be inserted	
GEN 2.2 - 35	15 MAY 2025	GEN 2.2 - 35	06 AUG 2026
GEN 2.2 - 36	15 MAY 2025	GEN 2.2 - 36	06 AUG 2026
GEN 2.2 - 37	25 DEC 2025	GEN 2.2 - 37	06 AUG 2026
GEN 2.2 - 38	15 MAY 2025	GEN 2.2 - 38	06 AUG 2026
GEN 2.2 - 39	15 MAY 2025	GEN 2.2 - 39	06 AUG 2026
GEN 2.2 - 40	25 DEC 2025	GEN 2.2 - 40	06 AUG 2026
GEN 2.2 - 41	25 DEC 2025	GEN 2.2 - 41	06 AUG 2026
GEN 2.2 - 42	25 DEC 2025	GEN 2.2 - 42	06 AUG 2026
GEN 2.2 - 43	15 MAY 2025	GEN 2.2 - 43	06 AUG 2026
GEN 2.2 - 44	25 DEC 2025	GEN 2.2 - 44	06 AUG 2026
GEN 3.5 - 1	14 MAY 2026	GEN 3.5 - 1	06 AUG 2026
GEN 3.5 - 2	14 MAY 2026	GEN 3.5 - 2	06 AUG 2026
GEN 3.5 - 9	14 MAY 2026	GEN 3.5 - 9	06 AUG 2026
GEN 3.5 - 10	14 MAY 2026	GEN 3.5 - 10	06 AUG 2026
GEN 3.5 - 11	14 MAY 2026	GEN 3.5 - 11	06 AUG 2026
GEN 3.5 - 12	14 MAY 2026	GEN 3.5 - 12	06 AUG 2026
GEN 3.5 - 13	14 MAY 2026	GEN 3.5 - 13	06 AUG 2026
GEN 3.5 - 14	14 MAY 2026	GEN 3.5 - 14	06 AUG 2026
		GEN 3.5 - 15	06 AUG 2026
		GEN 3.5 - 16	06 AUG 2026
ENR 0.6 - 8	14 MAY 2026	ENR 0.6 - 8	06 AUG 2026
ENR 5.2 - 2	14 MAY 2026	ENR 5.2 - 2	06 AUG 2026
ENR 5.2 - 3	14 MAY 2026	ENR 5.2 - 3	06 AUG 2026
ENR 5.2 - 4	14 MAY 2026	ENR 5.2 - 4	06 AUG 2026
ENR 5.2 - 5	14 MAY 2026	ENR 5.2 - 5	06 AUG 2026
ENR 5.2 - 6	14 MAY 2026	ENR 5.2 - 6	06 AUG 2026
ENR 5.2 - 7	14 MAY 2026	ENR 5.2 - 7	06 AUG 2026
ENR 5.2 - 8	14 MAY 2026	ENR 5.2 - 8	06 AUG 2026
ENR 5.2 - 9	14 MAY 2026	ENR 5.2 - 9	06 AUG 2026
ENR 5.2 - 10	14 MAY 2026	ENR 5.2 - 10	06 AUG 2026
ENR 5.2 - 11	14 MAY 2026	ENR 5.2 - 11	06 AUG 2026
ENR 5.2 - 12	14 MAY 2026	ENR 5.2 - 12	06 AUG 2026
ENR 5.2 - 13	14 MAY 2026	ENR 5.2 - 13	06 AUG 2026
ENR 5.2 - 14	14 MAY 2026	ENR 5.2 - 14	06 AUG 2026
AD 0.6 - 8	19 MAR 2026	AD 0.6 - 8	06 AUG 2026
AD 0.6 - 14	19 MAR 2026	AD 0.6 - 14	06 AUG 2026
AD 2 RCBS - 3	17 APR 2025	AD 2 RCBS - 3	06 AUG 2026
AD 2 RCBS - 7	10 JUL 2025	AD 2 RCBS - 7	06 AUG 2026
AD 2 RCBS - 10	10 JUL 2025	AD 2 RCBS - 10	06 AUG 2026
AD 2 RCCM - 5	28 NOV 2024	AD 2 RCCM - 5	06 AUG 2026
AD 2 RCCM - 6	15 MAY 2025	AD 2 RCCM - 6	06 AUG 2026
AD 2 RCDC - 5	28 NOV 2024	AD 2 RCDC - 5	06 AUG 2026
AD 2 RCFG - 1	22 MAR 2024	AD 2 RCFG - 1	06 AUG 2026
AD 2 RCFG - 6	08 AUG 2024	AD 2 RCFG - 6	06 AUG 2026
AD 2 RCFG - 15	15 MAY 2025	AD 2 RCFG - 15	06 AUG 2026

取消頁 page to be destroyed		換入頁 page to be inserted	
AD 2 RCFN - 7	22 MAR 2024	AD 2 RCFN - 7	06 AUG 2026
AD 2 RCGI - 6	22 MAR 2024	AD 2 RCGI - 6	06 AUG 2026
AD 2 RCKH - 3	25 DEC 2025	AD 2 RCKH - 3	06 AUG 2026
AD 2 RCKH - 4	19 MAR 2026	AD 2 RCKH - 4	06 AUG 2026
AD 2 RCKH - 5	19 MAR 2026	AD 2 RCKH - 5	06 AUG 2026
AD 2 RCKH - 6	19 MAR 2026	AD 2 RCKH - 6	06 AUG 2026
AD 2 RCKH - 11	19 MAR 2026	AD 2 RCKH - 11	06 AUG 2026
AD 2 RCKH - 12	10 JUL 2025	AD 2 RCKH - 12	06 AUG 2026
AD 2 RCKH - 13	19 MAR 2026	AD 2 RCKH - 13	06 AUG 2026
AD 2 RCKH - 14	10 JUL 2025	AD 2 RCKH - 14	06 AUG 2026
AD 2 RCKH - 15	10 JUL 2025	AD 2 RCKH - 15	06 AUG 2026
AD 2 RCKH - 17	19 MAR 2026	AD 2 RCKH - 17	06 AUG 2026
AD 2 RCKH - 18	19 MAR 2026	AD 2 RCKH - 18	06 AUG 2026
AD 2 RCKH - 19	17 APR 2025	AD 2 RCKH - 19	06 AUG 2026
AD 2 RCKH - 20	19 MAR 2026	AD 2 RCKH - 20	06 AUG 2026
AD 2 RCKH - 21	19 MAR 2026	AD 2 RCKH - 21	06 AUG 2026
AD 2 RCKH - 22	19 MAR 2026	AD 2 RCKH - 22	06 AUG 2026
AD 2 RCKH - 23	19 MAR 2026	AD 2 RCKH - 23	06 AUG 2026
AD 2 RCKH - 24	19 MAR 2026	AD 2 RCKH - 24	06 AUG 2026
AD 2 RCKH - 25	14 MAY 2026	AD 2 RCKH - 25	06 AUG 2026
AD 2 RCKH - 27	19 MAR 2026	AD 2 RCKH - 27	06 AUG 2026
AD 2 RCKU - 5	15 MAY 2025	AD 2 RCKU - 5	06 AUG 2026
AD 2 RCKU - 6	15 MAY 2025	AD 2 RCKU - 6	06 AUG 2026
AD 2 RCKW - 6	28 NOV 2024	AD 2 RCKW - 6	06 AUG 2026
AD 2 RCKW - 10	25 DEC 2025	AD 2 RCKW - 10	06 AUG 2026
AD 2 RCKW - 11	22 MAR 2024	AD 2 RCKW - 11	06 AUG 2026
AD 2 RCLY - 6	28 NOV 2024	AD 2 RCLY - 6	06 AUG 2026
AD 2 RCLY - 7	08 AUG 2024	AD 2 RCLY - 7	06 AUG 2026
AD 2 RCMQ - 8	25 DEC 2025	AD 2 RCMQ - 8	06 AUG 2026
AD 2 RCMQ - 10	25 DEC 2025	AD 2 RCMQ - 10	06 AUG 2026
AD 2 RCMQ - 55	03 OCT 2024	AD 2 RCMQ - 55	06 AUG 2026
AD 2 RCMT - 1	22 MAR 2024	AD 2 RCMT - 1	06 AUG 2026
AD 2 RCMT - 7	08 AUG 2024	AD 2 RCMT - 7	06 AUG 2026
AD 2 RCMT - 17	15 MAY 2025	AD 2 RCMT - 17	06 AUG 2026
AD 2 RCMT - 21	25 AUG 2022	AD 2 RCMT - 21	06 AUG 2026
AD 2 RCNN - 5	28 NOV 2024	AD 2 RCNN - 5	06 AUG 2026
AD 2 RCNN - 7	22 MAR 2024	AD 2 RCNN - 7	06 AUG 2026
AD 2 RCNN - 9	16 MAY 2024	AD 2 RCNN - 9	06 AUG 2026
AD 2 RCNN - 10	22 MAR 2024	AD 2 RCNN - 10	06 AUG 2026
AD 2 RCNN - 11	03 OCT 2024	AD 2 RCNN - 11	06 AUG 2026
AD 2 RCNN - 12	03 OCT 2024	AD 2 RCNN - 12	06 AUG 2026
AD 2 RCNN - 13	22 MAR 2024	AD 2 RCNN - 13	06 AUG 2026
AD 2 RCNN - 14	22 MAR 2024	AD 2 RCNN - 14	06 AUG 2026
AD 2 RCNN - 15	25 AUG 2022	AD 2 RCNN - 15	06 AUG 2026
AD 2 RCNN - 16	22 MAR 2024	AD 2 RCNN - 16	06 AUG 2026

取消頁 page to be destroyed		換入頁 page to be inserted	
AD 2 RCNN - 17	25 AUG 2022	AD 2 RCNN - 17	06 AUG 2026
AD 2 RCNN - 18	22 MAR 2024	AD 2 RCNN - 18	06 AUG 2026
AD 2 RCNN - 19	22 MAR 2024	AD 2 RCNN - 19	06 AUG 2026
AD 2 RCNN - 20	22 MAR 2024	AD 2 RCNN - 20	06 AUG 2026
AD 2 RCNN - 21	10 JUL 2025	AD 2 RCNN - 21	06 AUG 2026
AD 2 RCQC - 5	28 NOV 2024	AD 2 RCQC - 5	06 AUG 2026
AD 2 RCQC - 7	22 MAR 2024	AD 2 RCQC - 7	06 AUG 2026
AD 2 RCQC - 51	03 OCT 2024	AD 2 RCQC - 51	06 AUG 2026
AD 2 RCSP - 5	28 NOV 2024	AD 2 RCSP - 5	06 AUG 2026
AD 2 RCSS - 15	22 MAR 2024	AD 2 RCSS - 15	06 AUG 2026
AD 2 RCTP - 16	19 MAR 2026	AD 2 RCTP - 16	06 AUG 2026
AD 2 RCWA - 6	22 MAR 2024	AD 2 RCWA - 6	06 AUG 2026
AD 2 RCYU - 5	17 APR 2025	AD 2 RCYU - 5	06 AUG 2026
AD 2 RCYU - 7	22 MAR 2024	AD 2 RCYU - 7	06 AUG 2026

• 手寫修正
NIL

• Hand amendments
NIL

• 請在GEN 0.2-1 頁填入本次修正紀錄

• Record entry of AMDT on the page GEN 0.2-1

• 下列出版品編入本次修正:

• The following publications have been incorporated in this amendment:

AIP SUP	NIL
AIC	NIL
NOTAM	NIL

THIS PAGE
INTENTIONALLY
LEFT BLANK

GEN 0.2 飛航指南修正記錄

GEN 0.2 RECORD OF AIP AMENDMENTS

AIRAC AIP AMENDMENT			
序號 / 年 NR / Year	發布日期 Publication date	有效日期 Effective Date	Inserted by
AIRAC AIP AMDT 03/24	04 Apr 2024	16 May 2024	
AIRAC AIP AMDT 04/24	27 Jun 2024	08 Aug 2024	
AIRAC AIP AMDT 05/24	22 Aug 2024	03 Oct 2024	
AIRAC AIP AMDT 06/24	17 Oct 2024	28 Nov 2024	
AIRAC AIP AMDT 01/25	12 Dec 2024	23 Jan 2025	
AIRAC AIP AMDT 02/25	06 Mar 2025	17 Apr 2025	
AIRAC AIP AMDT 03/25	03 Apr 2025	15 May 2025	
AIRAC AIP AMDT 04/25	29 May 2025	10 Jul 2025	
AIRAC AIP AMDT 05/25	24 Jul 2025	04 Sep 2025	
AIRAC AIP AMDT 06/25	13 Nov 2025	25 Dec 2025	
AIRAC AIP AMDT 01/26	05 Feb 2026	19 Mar 2026	
AIRAC AIP AMDT 02/26	02 Apr 2026	14 May 2026	
AIRAC AIP AMDT 03/26	25 Jun 2026	06 Aug 2026	
AIP AMENDMENT			
序號 / 年 NR / Year	發布日期 Publication date	插入日期 Date inserted	Inserted by
AIP AMDT 01/24	22 Mar 2024	22 Mar 2024	

THIS PAGE
INTENTIONALLY
LEFT BLANK

GEN 0.4 CHECKLIST OF AIP PAGES						
PAGE	DATE					
GEN 0		1.7 - 9	10 JUL 2025	2.2 - 37	06 AUG 2026	
		1.7 - 10	10 JUL 2025	2.2 - 38	06 AUG 2026	
	0.1 - 1	28 NOV 2024	1.7 - 11	10 JUL 2025	2.2 - 39	06 AUG 2026
	0.1 - 2	22 MAR 2024	1.7 - 12	10 JUL 2025	2.2 - 40	06 AUG 2026
	0.1 - 3	22 MAR 2024	1.7 - 13	10 JUL 2025	2.2 - 41	06 AUG 2026
	0.1 - 4	22 MAR 2024	1.7 - 14	10 JUL 2025	2.2 - 42	06 AUG 2026
	0.2 - 1	06 AUG 2026	1.7 - 15	10 JUL 2025	2.2 - 43	06 AUG 2026
	0.2 - 2	22 MAR 2024	1.7 - 16	10 JUL 2025	2.2 - 44	06 AUG 2026
	0.3 - 1	22 MAR 2024	1.7 - 17	10 JUL 2025	2.3 - 1	22 MAR 2024
	0.3 - 2	22 MAR 2024	1.7 - 18	10 JUL 2025	2.3 - 2	22 MAR 2024
	0.4 - 1	06 AUG 2026	1.7 - 19	10 JUL 2025	2.3 - 3	22 MAR 2024
	0.4 - 2	06 AUG 2026	1.7 - 20	10 JUL 2025	2.3 - 4	22 MAR 2024
	0.4 - 3	06 AUG 2026	1.7 - 21	10 JUL 2025	2.3 - 5	22 MAR 2024
	0.4 - 4	06 AUG 2026	1.7 - 22	10 JUL 2025	2.3 - 6	22 MAR 2024
	0.4 - 5	06 AUG 2026	1.7 - 23	10 JUL 2025	2.3 - 7	22 MAR 2024
	0.4 - 6	06 AUG 2026	1.7 - 24	10 JUL 2025	2.3 - 8	22 MAR 2024
	0.4 - 7	06 AUG 2026			2.3 - 9	22 MAR 2024
	0.4 - 8	06 AUG 2026			2.3 - 10	22 MAR 2024
	0.4 - 9	06 AUG 2026			2.3 - 11	22 MAR 2024
	0.4 - 10	06 AUG 2026			2.3 - 12	22 MAR 2024
	0.5 - 1	22 MAR 2024	2.1 - 1	22 MAR 2024	2.4 - 1	22 MAR 2024
	0.5 - 2	22 MAR 2024	2.1 - 2	22 MAR 2024	2.4 - 2	22 MAR 2024
	0.6 - 1	25 DEC 2025	2.1 - 3	25 DEC 2025	2.4 - 3	22 MAR 2024
	0.6 - 2	25 DEC 2025	2.1 - 4	22 MAR 2024	2.4 - 4	22 MAR 2024
	0.6 - 3	25 DEC 2025	2.2 - 1	25 DEC 2025	2.5 - 1	22 MAR 2024
	0.6 - 4	06 AUG 2026	2.2 - 2	22 MAR 2024	2.5 - 2	03 OCT 2024
	0.6 - 5	06 AUG 2026	2.2 - 3	22 MAR 2024	2.5 - 3	03 OCT 2024
	0.6 - 6	22 MAR 2024	2.2 - 4	22 MAR 2024	2.5 - 4	22 MAR 2024
	GEN 1		2.2 - 5	22 MAR 2024	2.6 - 1	22 MAR 2024
			2.2 - 6	25 DEC 2025	2.6 - 2	22 MAR 2024
		2.2 - 7	22 MAR 2024	2.7 - 1	22 MAR 2024	
		2.2 - 8	22 MAR 2024	2.7 - 2	22 MAR 2024	
		2.2 - 9	06 AUG 2026	2.7 - 3	25 DEC 2025	
1.1 - 1		22 MAR 2024	2.2 - 10	22 MAR 2024	2.7 - 4	22 MAR 2024
1.1 - 2		22 MAR 2024	2.2 - 11	25 DEC 2025	2.7 - 5	25 DEC 2025
1.2 - 1		22 MAR 2024	2.2 - 12	06 AUG 2026	2.7 - 6	22 MAR 2024
1.2 - 2		22 MAR 2024	2.2 - 13	06 AUG 2026	2.7 - 7	25 DEC 2025
1.2 - 3		22 MAR 2024	2.2 - 14	06 AUG 2026	2.7 - 8	22 MAR 2024
1.2 - 4		22 MAR 2024	2.2 - 15	06 AUG 2026	2.7 - 9	25 DEC 2025
1.2 - 5		22 MAR 2024	2.2 - 16	06 AUG 2026	2.7 - 10	22 MAR 2024
1.2 - 6		22 MAR 2024	2.2 - 17	06 AUG 2026	2.7 - 11	25 DEC 2025
1.3 - 1		22 MAR 2024	2.2 - 18	06 AUG 2026	2.7 - 12	22 MAR 2024
1.3 - 2		22 MAR 2024	2.2 - 19	06 AUG 2026	2.7 - 13	25 DEC 2025
1.3 - 3		22 MAR 2024	2.2 - 20	06 AUG 2026	2.7 - 14	22 MAR 2024
1.3 - 4		22 MAR 2024	2.2 - 21	06 AUG 2026	2.7 - 15	25 DEC 2025
1.3 - 5		22 MAR 2024	2.2 - 22	06 AUG 2026	2.7 - 16	22 MAR 2024
1.3 - 6		22 MAR 2024	2.2 - 23	06 AUG 2026	2.7 - 17	25 DEC 2025
1.4 - 1		22 MAR 2024	2.2 - 24	06 AUG 2026	2.7 - 18	22 MAR 2024
1.4 - 2		22 MAR 2024	2.2 - 25	06 AUG 2026	2.7 - 19	25 DEC 2025
1.5 - 1		22 MAR 2024	2.2 - 26	06 AUG 2026	2.7 - 20	22 MAR 2024
1.5 - 2		22 MAR 2024	2.2 - 27	06 AUG 2026	2.7 - 21	25 DEC 2025
1.6 - 1		22 MAR 2024	2.2 - 28	06 AUG 2026	2.7 - 22	22 MAR 2024
1.6 - 2		22 MAR 2024	2.2 - 29	06 AUG 2026	2.7 - 23	25 DEC 2025
1.7 - 1		10 JUL 2025	2.2 - 30	06 AUG 2026	2.7 - 24	22 MAR 2024
1.7 - 2		10 JUL 2025	2.2 - 31	06 AUG 2026		

GEN 3	2.7 - 29	25 DEC 2025	ENR 0	4.1 - 1	22 MAR 2024		1.8 - 1	22 MAR 2024
	2.7 - 30	22 MAR 2024		4.1 - 2	22 MAR 2024		1.8 - 2	22 MAR 2024
	2.7 - 31	25 DEC 2025		4.2 - 1	22 MAR 2024		1.8 - 3	22 MAR 2024
	2.7 - 32	22 MAR 2024		4.2 - 2	22 MAR 2024		1.8 - 4	22 MAR 2024
	2.7 - 33	25 DEC 2025					1.8 - 5	22 MAR 2024
	2.7 - 34	22 MAR 2024					1.8 - 6	22 MAR 2024
	2.7 - 35	25 DEC 2025		0.1 - 1	28 NOV 2024		1.8 - 7	22 MAR 2024
	2.7 - 36	22 MAR 2024		0.1 - 2	22 MAR 2024		1.8 - 8	22 MAR 2024
	2.7 - 37	25 DEC 2025		0.2 - 1	22 MAR 2024		1.8 - 9	22 MAR 2024
	2.7 - 38	22 MAR 2024		0.2 - 2	22 MAR 2024		1.8 - 10	22 MAR 2024
				0.3 - 1	22 MAR 2024		1.8 - 11	22 MAR 2024
				0.3 - 2	22 MAR 2024		1.8 - 12	22 MAR 2024
	3.1 - 1	22 MAR 2024		0.4 - 1	22 MAR 2024		1.8 - 13	22 MAR 2024
	3.1 - 2	22 MAR 2024		0.4 - 2	22 MAR 2024		1.8 - 14	22 MAR 2024
	3.1 - 3	25 DEC 2025		0.5 - 1	22 MAR 2024		1.8 - 15	22 MAR 2024
	3.1 - 4	10 JUL 2025		0.5 - 2	22 MAR 2024		1.8 - 16	22 MAR 2024
	3.1 - 5	25 DEC 2025		0.6 - 1	25 DEC 2025		1.8 - 17	22 MAR 2024
	3.1 - 6	25 DEC 2025		0.6 - 2	22 MAR 2024		1.8 - 18	22 MAR 2024
	3.1 - 7	22 MAR 2024		0.6 - 3	22 MAR 2024		1.8 - 19	22 MAR 2024
	3.1 - 8	22 MAR 2024		0.6 - 4	25 DEC 2025		1.8 - 20	22 MAR 2024
	3.2 - 1	22 MAR 2024	ENR 1	0.6 - 5	17 APR 2025		1.9 - 1	22 MAR 2024
	3.2 - 2	22 MAR 2024		0.6 - 6	17 APR 2025		1.9 - 2	22 MAR 2024
	3.2 - 3	22 MAR 2024		0.6 - 7	25 DEC 2025		1.10 - 1	25 DEC 2025
	3.2 - 4	22 MAR 2024		0.6 - 8	06 AUG 2026		1.10 - 2	25 DEC 2025
	3.3 - 1	22 MAR 2024					1.10 - 3	22 MAR 2024
	3.3 - 2	22 MAR 2024					1.10 - 4	22 MAR 2024
	3.3 - 3	22 MAR 2024		1.1 - 1	22 MAR 2024		1.11 - 1	08 AUG 2024
	3.3 - 4	22 MAR 2024		1.1 - 2	22 MAR 2024		1.11 - 2	22 MAR 2024
	3.3 - 5	22 MAR 2024		1.1 - 3	22 MAR 2024		1.12 - 1	22 MAR 2024
	3.3 - 6	22 MAR 2024		1.1 - 4	22 MAR 2024		1.12 - 2	22 MAR 2024
	3.3 - 7	17 APR 2025		1.1 - 5	22 MAR 2024		1.12 - 3	22 MAR 2024
	3.3 - 8	22 MAR 2024		1.1 - 6	22 MAR 2024		1.12 - 4	22 MAR 2024
	3.4 - 1	22 MAR 2024		1.2 - 1	22 MAR 2024		1.12 - 5	22 MAR 2024
	3.4 - 2	22 MAR 2024		1.2 - 2	22 MAR 2024		1.12 - 6	22 MAR 2024
	3.4 - 3	22 MAR 2024		1.2 - 3	22 MAR 2024		1.13 - 1	22 MAR 2024
	3.4 - 4	22 MAR 2024		1.2 - 4	22 MAR 2024		1.13 - 2	22 MAR 2024
	3.4 - 5	22 MAR 2024		1.3 - 1	22 MAR 2024		1.14 - 1	22 MAR 2024
	3.4 - 6	22 MAR 2024		1.3 - 2	19 MAR 2026		1.14 - 2	22 MAR 2024
	3.5 - 1	06 AUG 2026		1.3 - 3	19 MAR 2026		1.14 - 3	22 MAR 2024
GEN 4	3.5 - 2	06 AUG 2026	ENR 2	1.3 - 4	22 MAR 2024		1.14 - 4	22 MAR 2024
	3.5 - 3	14 MAY 2026		1.4 - 1	22 MAR 2024			
	3.5 - 4	14 MAY 2026		1.4 - 2	22 MAR 2024			
	3.5 - 5	14 MAY 2026		1.4 - 3	22 MAR 2024		2.1 - 1	22 MAR 2024
	3.5 - 6	14 MAY 2026		1.4 - 4	22 MAR 2024		2.1 - 2	22 MAR 2024
	3.5 - 7	14 MAY 2026		1.5 - 1	22 MAR 2024		2.1 - 3	22 MAR 2024
	3.5 - 8	14 MAY 2026		1.5 - 2	22 MAR 2024		2.1 - 4	22 MAR 2024
	3.5 - 9	06 AUG 2026		1.5 - 3	22 MAR 2024		2.1 - 5	22 MAR 2024
	3.5 - 10	06 AUG 2026		1.5 - 4	22 MAR 2024		2.1 - 6	22 MAR 2024
	3.5 - 11	06 AUG 2026		1.5 - 5	22 MAR 2024		2.1 - 7	22 MAR 2024
	3.5 - 12	06 AUG 2026		1.5 - 6	22 MAR 2024		2.1 - 8	22 MAR 2024
	3.5 - 13	06 AUG 2026		1.6 - 1	17 APR 2025		2.1 - 9	22 MAR 2024
	3.5 - 14	06 AUG 2026		1.6 - 2	22 MAR 2024		2.1 - 10	22 MAR 2024
	3.5 - 15	06 AUG 2026		1.6 - 3	22 MAR 2024		2.1 - 11	22 MAR 2024
	3.5 - 16	06 AUG 2026		1.6 - 4	22 MAR 2024		2.1 - 12	22 MAR 2024
	3.6 - 1	22 MAR 2024		1.6 - 5	22 MAR 2024		2.2 - 1	22 MAR 2024
	3.6 - 2	22 MAR 2024		1.6 - 6	22 MAR 2024		2.2 - 2	22 MAR 2024
	3.6 - 3	22 MAR 2024		1.7 - 1	22 MAR 2024	ENR 3		
	3.6 - 4	22 MAR 2024		1.7 - 2	22 MAR 2024			
				1.7 - 3	22 MAR 2024		3.1 - 1	17 APR 2025
				1.7 - 4	22 MAR 2024		3.1 - 2	22 MAR 2024

3.1 A1 - 1	17 APR 2025	3.1 V23	17 APR 2025	3.2 T1 RNAV	17 APR 2025
3.1 A1 - 2	04 SEPT 2025	TRANSITION - 2		TRANSITION - 1	
3.1 A1 - 3	10 JUL 2025	3.1 V25	17 APR 2025	3.2 T1 RNAV	17 APR 2025
3.1 A1 - 4	17 APR 2025	TRANSITION - 1		TRANSITION - 2	
3.1 A577 - 1	17 APR 2025	3.1 V25	17 APR 2025	3.2 T11 RNAV	17 APR 2025
3.1 A577 - 2	17 APR 2025	TRANSITION - 2		TRANSITION - 1	
3.1 B1	17 APR 2025	3.1 W2 - 1	17 APR 2025	3.2 T11 RNAV	17 APR 2025
TRANSITION - 1		3.1 W2 - 2	17 APR 2025	TRANSITION - 2	
3.1 B1	17 APR 2025	3.1 W2 - 3	17 APR 2025	3.2 T13 RNAV	17 APR 2025
TRANSITION - 2		3.1 W2 - 4	22 MAR 2024	TRANSITION - 1	
3.1 B576 - 1	17 APR 2025	3.1 W4 - 1	17 APR 2025	3.2 T13 RNAV	17 APR 2025
3.1 B576 - 2	17 APR 2025	3.1 W4 - 2	04 SEPT 2025	TRANSITION - 2	
3.1 B591 - 1	17 APR 2025	3.1 W4 - 3	10 JUL 2025	3.2 T15 RNAV	17 APR 2025
3.1 B591 - 2	17 APR 2025	3.1 W4 - 4	22 MAR 2024	TRANSITION - 1	
3.1 B591 - 3	17 APR 2025	3.1 W6 - 1	17 APR 2025	3.2 T15 RNAV	17 APR 2025
3.1 B591 - 4	17 APR 2025	3.1 W6 - 2	17 APR 2025	TRANSITION - 2	
3.1 B591 - 5	17 APR 2025	3.1 W8 - 1	17 APR 2025	3.2 T3 RNAV	17 APR 2025
3.1 B591 - 6	17 APR 2025	3.1 W8 - 2	17 APR 2025	TRANSITION - 1	
3.1 G581 - 1	17 APR 2025	3.1 W8 - 3	17 APR 2025	3.2 T3 RNAV	17 APR 2025
3.1 G581 - 2	17 APR 2025	3.1 W8 - 4	17 APR 2025	TRANSITION - 2	
3.1 G581 - 3	17 APR 2025	3.2 - 1	17 APR 2025	3.2 T5 RNAV	17 APR 2025
3.1 G581 - 4	22 MAR 2024	3.2 - 2	22 MAR 2024	TRANSITION - 1	
3.1 G587 - 1	17 APR 2025	3.2 L1 RNAV	17 APR 2025	3.2 T5 RNAV	17 APR 2025
3.1 G587 - 2	17 APR 2025	TRANSITION - 1		TRANSITION - 2	
3.1 G86 - 1	17 APR 2025	3.2 L1 RNAV	17 APR 2025	3.2 T7 RNAV	17 APR 2025
3.1 G86 - 2	22 MAR 2024	TRANSITION - 2		TRANSITION - 1	
3.1 J1	17 APR 2025	3.2 L2 RNAV	17 APR 2025	3.2 T7 RNAV	17 APR 2025
TRANSITION - 1		TRANSITION - 1		TRANSITION - 2	
3.1 J1	17 APR 2025	3.2 L2 RNAV	17 APR 2025	3.3 - 1	10 JUL 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 2	17 APR 2025
3.1 J4	17 APR 2025	3.2 L3 RNAV	17 APR 2025	3.3 - 3	17 APR 2025
TRANSITION - 1		TRANSITION - 1		3.3 - 4	19 MAR 2026
3.1 J4	25 DEC 2025	3.2 L3 RNAV	17 APR 2025	3.3 - 5	17 APR 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 6	17 APR 2025
3.1 J5	17 APR 2025	3.2 L4 RNAV	17 APR 2025	3.3 - 7	19 MAR 2026
TRANSITION - 1		TRANSITION - 1		3.3 - 8	17 APR 2025
3.1 J5	17 APR 2025	3.2 L4 RNAV	17 APR 2025	3.3 - 9	17 APR 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 10	17 APR 2025
3.1 J7	17 APR 2025	3.2 M646 - 1	17 APR 2025	3.3 - 11	17 APR 2025
TRANSITION - 1		3.2 M646 - 2	17 APR 2025	3.3 - 12	17 APR 2025
3.1 J7	17 APR 2025	3.2 M750 - 1	17 APR 2025	3.3 - 13	17 APR 2025
TRANSITION - 2		3.2 M750 - 2	17 APR 2025	3.3 - 14	17 APR 2025
3.1 R583 - 1	17 APR 2025	3.2 M750 - 3	17 APR 2025	3.3 - 15	14 MAY 2026
3.1 R583 - 2	17 APR 2025	3.2 M750 - 4	17 APR 2025	3.3 - 16	17 APR 2025
3.1 R595 - 1	17 APR 2025	3.2 N892 - 1	17 APR 2025	3.3 - 17	17 APR 2025
3.1 R595 - 2	17 APR 2025	3.2 N892 - 2	17 APR 2025	3.3 - 18	17 APR 2025
3.1 V12	17 APR 2025	3.2 Q11 - 1	17 APR 2025	3.3 - 19	17 APR 2025
TRANSITION - 1		3.2 Q11 - 2	17 APR 2025	3.3 - 20	17 APR 2025
3.1 V12	17 APR 2025	3.2 Q11 - 3	17 APR 2025	3.3 - 21	17 APR 2025
TRANSITION - 2		3.2 Q11 - 4	17 APR 2025	3.3 - 22	17 APR 2025
3.1 V14	17 APR 2025	3.2 Q12 - 1	17 APR 2025	3.3 - 23	17 APR 2025
TRANSITION - 1		3.2 Q12 - 2	17 APR 2025	3.3 - 24	17 APR 2025
3.1 V14	17 APR 2025	3.2 Q13 - 1	17 APR 2025	3.3 - 25	17 APR 2025
TRANSITION - 2		3.2 Q13 - 2	17 APR 2025	3.3 - 26	17 APR 2025
3.1 V21	17 APR 2025	3.2 Q14 - 1	17 APR 2025	3.3 - 27	17 APR 2025
TRANSITION - 1		3.2 Q14 - 2	17 APR 2025	3.3 - 28	17 APR 2025
3.1 V21	17 APR 2025	3.2 R200 - 1	17 APR 2025	3.3 - 29	17 APR 2025
TRANSITION - 2		3.2 R200 - 2	17 APR 2025	3.3 - 30	17 APR 2025
3.1 V23	17 APR 2025	3.2 R596 - 1	17 APR 2025	3.3 - 31	17 APR 2025
TRANSITION - 1		3.2 R596 - 2	17 APR 2025	3.3 - 32	17 APR 2025

ENR 4	3.3 - 33	17 APR 2025	5.2 - 13	06 AUG 2026	0.2 - 1	22 MAR 2024
	3.3 - 34	17 APR 2025	5.2 - 14	06 AUG 2026	0.2 - 2	22 MAR 2024
	3.4 - 1	17 APR 2025	5.2 - 15	14 MAY 2026	0.3 - 1	22 MAR 2024
	3.4 - 2	17 APR 2025	5.2 - 16	14 MAY 2026	0.3 - 2	22 MAR 2024
	3.4 - 3	17 APR 2025	5.3 - 1	22 MAR 2024	0.4 - 1	22 MAR 2024
	3.4 - 4	17 APR 2025	5.3 - 2	22 MAR 2024	0.4 - 2	22 MAR 2024
	3.5 - 1	17 APR 2025	5.3 - 3	22 MAR 2024	0.5 - 1	22 MAR 2024
	3.5 - 2	17 APR 2025	5.3 - 4	17 APR 2025	0.5 - 2	22 MAR 2024
	3.5 - 3	17 APR 2025	5.3 - 5	22 MAR 2024	0.6 - 1	25 DEC 2025
	3.5 - 4	17 APR 2025	5.3 - 6	17 APR 2025	0.6 - 2	25 DEC 2025
			5.4 - 1	22 MAR 2024	0.6 - 3	25 DEC 2025
			5.4 - 2	22 MAR 2024	0.6 - 4	17 APR 2025
	4.1 - 1	25 DEC 2025	5.5 - 1	17 APR 2025	0.6 - 5	25 DEC 2025
	4.1 - 2	17 APR 2025	5.5 - 2	14 MAY 2026	0.6 - 6	25 DEC 2025
	4.2 - 1	22 MAR 2024	5.5 - 3	14 MAY 2026	0.6 - 7	25 DEC 2025
	4.2 - 2	22 MAR 2024	5.5 - 4	14 MAY 2026	0.6 - 8	06 AUG 2026
	4.3 - 1	22 MAR 2024	5.5 - 5	14 MAY 2026	0.6 - 9	19 MAR 2026
	4.3 - 2	22 MAR 2024	5.5 - 6	14 MAY 2026	0.6 - 10	19 MAR 2026
	4.4 - 1	17 APR 2025	5.5 - 7	14 MAY 2026	0.6 - 11	19 MAR 2026
ENR 5	4.4 - 2	17 APR 2025	5.5 - 8	14 MAY 2026	0.6 - 12	19 MAR 2026
	4.4 - 3	10 JUL 2025	5.5 - 9	14 MAY 2026	0.6 - 13	19 MAR 2026
	4.4 - 4	10 JUL 2025	5.5 - 10	14 MAY 2026	0.6 - 14	06 AUG 2026
	4.4 - 5	10 JUL 2025	5.5 - 11	14 MAY 2026	0.6 - 15	19 MAR 2026
	4.4 - 6	10 JUL 2025	5.5 - 12	14 MAY 2026	0.6 - 16	19 MAR 2026
	4.5 - 1	22 MAR 2024	5.5 - 13	14 MAY 2026	0.6 - 17	14 MAY 2026
	4.5 - 2	22 MAR 2024	5.5 - 14	14 MAY 2026	0.6 - 18	14 MAY 2026
			5.5 - 15	14 MAY 2026	0.6 - 19	14 MAY 2026
			5.5 - 16	14 MAY 2026	0.6 - 20	14 MAY 2026
	5.1 - 1	22 MAR 2024	5.6 - 1	22 MAR 2024	0.6 - 21	14 MAY 2026
	5.1 - 2	22 MAR 2024	5.6 - 2	22 MAR 2024	0.6 - 22	14 MAY 2026
	5.1 - 3	22 MAR 2024				
	5.1 - 4	22 MAR 2024	ENR 6		AD 1	
	5.1 - 5	22 MAR 2024	6.1 - 1	17 APR 2025	1.1 - 1	22 MAR 2024
	5.1 - 6	22 MAR 2024	6.1 - 2	22 MAR 2024	1.1 - 2	22 MAR 2024
	5.1 - 7	22 MAR 2024	6.1 - 3	17 APR 2025	1.1 - 3	22 MAR 2024
	5.1 - 8	22 MAR 2024	6.1 - 4	22 MAR 2024	1.1 - 4	22 MAR 2024
	5.1 - 9	22 MAR 2024	6.1 - 5	25 DEC 2025	1.1 - 5	22 MAR 2024
	5.1 - 10	22 MAR 2024	6.1 - 6	17 APR 2025	1.1 - 6	22 MAR 2024
	5.1 - 11	22 MAR 2024	6.1 - 7	17 APR 2025	1.2 - 1	22 MAR 2024
	5.1 - 12	14 MAY 2026	6.1 - 8	17 APR 2025	1.2 - 2	22 MAR 2024
	5.1 - 13	14 MAY 2026	6.1 - 9	17 APR 2025	1.3 - 1	22 MAR 2024
	5.1 - 14	22 MAR 2024	6.1 - 10	17 APR 2025	1.3 - 2	22 MAR 2024
	5.1 - 15	22 MAR 2024	6.1 - 11	17 APR 2025	1.3 - 3	22 MAR 2024
	5.1 - 16	22 MAR 2024	6.1 - 12	17 APR 2025	1.3 - 4	22 MAR 2024
	5.1 - 17	22 MAR 2024	6.1 - 13	17 APR 2025	1.3 - 5	25 AUG 2022
	5.1 - 18	22 MAR 2024	6.1 - 14	17 APR 2025	1.3 - 6	22 MAR 2024
	5.1 - 19	25 AUG 2022	6.1 - 15	10 JUL 2025	1.4 - 1	22 MAR 2024
	5.1 - 20	22 MAR 2024	6.1 - 16	17 APR 2025	1.4 - 2	22 MAR 2024
	5.2 - 1	14 MAY 2026	6.1 - 17	17 APR 2025		
	5.2 - 2	06 AUG 2026	6.1 - 18	17 APR 2025	AD 2	
	5.2 - 3	06 AUG 2026	6.1 - 19	17 APR 2025	AD 2 RCBS - 1	14 MAY 2026
	5.2 - 4	06 AUG 2026	6.1 - 20	17 APR 2025	AD 2 RCBS - 2	22 MAR 2024
	5.2 - 5	06 AUG 2026	6.1 - 21	17 APR 2025	AD 2 RCBS - 3	06 AUG 2026
	5.2 - 6	06 AUG 2026	6.1 - 22	17 APR 2025	AD 2 RCBS - 4	10 JUL 2025
	5.2 - 7	06 AUG 2026	6.1 - 23	17 APR 2025	AD 2 RCBS - 5	10 JUL 2025
	5.2 - 8	06 AUG 2026	6.1 - 24	17 APR 2025	AD 2 RCBS - 6	14 MAY 2026
	5.2 - 9	06 AUG 2026			AD 2 RCBS - 7	06 AUG 2026
	5.2 - 10	06 AUG 2026	AD 0		AD 2 RCBS - 8	10 JUL 2025
	5.2 - 11	06 AUG 2026	0.1 - 1	28 NOV 2024	AD 2 RCBS - 9	19 MAR 2026
	5.2 - 12	06 AUG 2026	0.1 - 2	22 MAR 2024	AD 2 RCBS - 10	06 AUG 2026

AD 2 RCBS - 11	22 MAR 2024	AD 2 RCCM - 17	25 AUG 2022	AD 2 RCFG - 35	17 APR 2025
AD 2 RCBS - 12	22 MAR 2024	AD 2 RCCM - 18	22 MAR 2024	AD 2 RCFG - 36	17 APR 2025
AD 2 RCBS - 13	23 JAN 2025	AD 2 RCCM - 19	17 APR 2025	AD 2 RCFN - 1	10 JUL 2025
AD 2 RCBS - 14	03 OCT 2024	AD 2 RCCM - 20	17 APR 2025	AD 2 RCFN - 2	22 MAR 2024
AD 2 RCBS - 15	17 APR 2025	AD 2 RCDC - 1	15 MAY 2025	AD 2 RCFN - 3	28 NOV 2024
AD 2 RCBS - 16	03 OCT 2024	AD 2 RCDC - 2	22 MAR 2024	AD 2 RCFN - 4	22 MAR 2024
AD 2 RCBS - 17	10 JUL 2025	AD 2 RCDC - 3	22 MAR 2024	AD 2 RCFN - 5	28 NOV 2024
AD 2 RCBS - 18	22 MAR 2024	AD 2 RCDC - 4	22 MAR 2024	AD 2 RCFN - 6	14 MAY 2026
AD 2 RCBS - 19	25 AUG 2022	AD 2 RCDC - 5	06 AUG 2026	AD 2 RCFN - 7	06 AUG 2026
AD 2 RCBS - 20	22 MAR 2024	AD 2 RCDC - 6	19 MAR 2026	AD 2 RCFN - 8	19 MAR 2026
AD 2 RCBS - 21	15 MAY 2025	AD 2 RCDC - 7	22 MAR 2024	AD 2 RCFN - 9	04 SEPT 2025
AD 2 RCBS - 22	22 MAR 2024	AD 2 RCDC - 8	22 MAR 2024	AD 2 RCFN - 10	17 APR 2025
AD 2 RCBS - 23	25 AUG 2022	AD 2 RCDC - 9	22 MAR 2024	AD 2 RCFN - 11	04 SEPT 2025
AD 2 RCBS - 24	22 MAR 2024	AD 2 RCDC - 10	22 MAR 2024	AD 2 RCFN - 12	04 SEPT 2025
AD 2 RCBS - 25	25 AUG 2022	AD 2 RCDC - 11	25 AUG 2022	AD 2 RCFN - 13	04 SEPT 2025
AD 2 RCBS - 26	22 MAR 2024	AD 2 RCDC - 12	22 MAR 2024	AD 2 RCFN - 14	04 SEPT 2025
AD 2 RCBS - 27	25 AUG 2022	AD 2 RCDC - 13	25 AUG 2022	AD 2 RCFN - 15	22 MAR 2024
AD 2 RCBS - 28	22 MAR 2024	AD 2 RCDC - 14	22 MAR 2024	AD 2 RCFN - 16	22 MAR 2024
AD 2 RCBS - 29	25 AUG 2022	AD 2 RCDC - 15	25 AUG 2022	AD 2 RCFN - 17	10 JUL 2025
AD 2 RCBS - 30	22 MAR 2024	AD 2 RCDC - 16	22 MAR 2024	AD 2 RCFN - 18	22 MAR 2024
AD 2 RCBS - 31	25 AUG 2022	AD 2 RCDC - 17	25 AUG 2022	AD 2 RCFN - 19	10 JUL 2025
AD 2 RCBS - 32	22 MAR 2024	AD 2 RCDC - 18	22 MAR 2024	AD 2 RCFN - 20	22 MAR 2024
AD 2 RCBS - 33	25 AUG 2022	AD 2 RCDC - 19	25 AUG 2022	AD 2 RCFN - 21	25 AUG 2022
AD 2 RCBS - 34	22 MAR 2024	AD 2 RCDC - 20	22 MAR 2024	AD 2 RCFN - 22	22 MAR 2024
AD 2 RCBS - 35	25 AUG 2022	AD 2 RCDC - 21	17 APR 2025	AD 2 RCFN - 23	07 SEPT 2023
AD 2 RCBS - 36	22 MAR 2024	AD 2 RCDC - 22	17 APR 2025	AD 2 RCFN - 24	22 MAR 2024
AD 2 RCBS - 37	25 AUG 2022	AD 2 RCFG - 1	06 AUG 2026	AD 2 RCFN - 25	07 SEPT 2023
AD 2 RCBS - 38	22 MAR 2024	AD 2 RCFG - 2	22 MAR 2024	AD 2 RCFN - 26	22 MAR 2024
AD 2 RCBS - 39	25 AUG 2022	AD 2 RCFG - 3	25 DEC 2025	AD 2 RCFN - 27	25 AUG 2022
AD 2 RCBS - 40	22 MAR 2024	AD 2 RCFG - 4	08 AUG 2024	AD 2 RCFN - 28	22 MAR 2024
AD 2 RCBS - 41	25 AUG 2022	AD 2 RCFG - 5	14 MAY 2026	AD 2 RCFN - 29	25 AUG 2022
AD 2 RCBS - 42	22 MAR 2024	AD 2 RCFG - 6	06 AUG 2026	AD 2 RCFN - 30	22 MAR 2024
AD 2 RCBS - 43	25 AUG 2022	AD 2 RCFG - 7	08 AUG 2024	AD 2 RCFN - 31	25 AUG 2022
AD 2 RCBS - 44	22 MAR 2024	AD 2 RCFG - 8	19 MAR 2026	AD 2 RCFN - 32	22 MAR 2024
AD 2 RCBS - 45	25 AUG 2022	AD 2 RCFG - 9	08 AUG 2024	AD 2 RCFN - 33	25 AUG 2022
AD 2 RCBS - 46	22 MAR 2024	AD 2 RCFG - 10	03 OCT 2024	AD 2 RCFN - 34	22 MAR 2024
AD 2 RCBS - 47	25 AUG 2022	AD 2 RCFG - 11	03 OCT 2024	AD 2 RCFN - 35	25 AUG 2022
AD 2 RCBS - 48	22 MAR 2024	AD 2 RCFG - 12	03 OCT 2024	AD 2 RCFN - 36	22 MAR 2024
AD 2 RCBS - 49	25 AUG 2022	AD 2 RCFG - 13	22 MAR 2024	AD 2 RCFN - 37	25 AUG 2022
AD 2 RCBS - 50	22 MAR 2024	AD 2 RCFG - 14	22 MAR 2024	AD 2 RCFN - 38	22 MAR 2024
AD 2 RCBS - 51	16 MAY 2024	AD 2 RCFG - 15	06 AUG 2026	AD 2 RCFN - 39	25 AUG 2022
AD 2 RCBS - 52	22 MAR 2024	AD 2 RCFG - 16	22 MAR 2024	AD 2 RCFN - 40	22 MAR 2024
AD 2 RCBS - 53	17 APR 2025	AD 2 RCFG - 17	08 AUG 2024	AD 2 RCFN - 41	25 AUG 2022
AD 2 RCBS - 54	17 APR 2025	AD 2 RCFG - 18	22 MAR 2024	AD 2 RCFN - 42	22 MAR 2024
AD 2 RCCM - 1	10 JUL 2025	AD 2 RCFG - 19	08 AUG 2024	AD 2 RCFN - 43	16 MAY 2024
AD 2 RCCM - 2	22 MAR 2024	AD 2 RCFG - 20	22 MAR 2024	AD 2 RCFN - 44	22 MAR 2024
AD 2 RCCM - 3	28 NOV 2024	AD 2 RCFG - 21	08 AUG 2024	AD 2 RCFN - 45	17 APR 2025
AD 2 RCCM - 4	14 MAY 2026	AD 2 RCFG - 22	22 MAR 2024	AD 2 RCFN - 46	17 APR 2025
AD 2 RCCM - 5	06 AUG 2026	AD 2 RCFG - 23	08 AUG 2024	AD 2 RCGI - 1	10 JUL 2025
AD 2 RCCM - 6	06 AUG 2026	AD 2 RCFG - 24	22 MAR 2024	AD 2 RCGI - 2	22 MAR 2024
AD 2 RCCM - 7	19 MAR 2026	AD 2 RCFG - 25	08 AUG 2024	AD 2 RCGI - 3	28 NOV 2024
AD 2 RCCM - 8	22 MAR 2024	AD 2 RCFG - 26	22 MAR 2024	AD 2 RCGI - 4	22 MAR 2024
AD 2 RCCM - 9	22 MAR 2024	AD 2 RCFG - 27	08 AUG 2024	AD 2 RCGI - 5	14 MAY 2026
AD 2 RCCM - 10	22 MAR 2024	AD 2 RCFG - 28	22 MAR 2024	AD 2 RCGI - 6	06 AUG 2026
AD 2 RCCM - 11	10 JUL 2025	AD 2 RCFG - 29	25 AUG 2022	AD 2 RCGI - 7	19 MAR 2026
AD 2 RCCM - 12	22 MAR 2024	AD 2 RCFG - 30	22 MAR 2024	AD 2 RCGI - 8	22 MAR 2024
AD 2 RCCM - 13	25 AUG 2022	AD 2 RCFG - 31	08 AUG 2024	AD 2 RCGI - 9	22 MAR 2024
AD 2 RCCM - 14	22 MAR 2024	AD 2 RCFG - 32	22 MAR 2024	AD 2 RCGI - 10	22 MAR 2024
AD 2 RCCM - 15	25 AUG 2022	AD 2 RCFG - 33	08 AUG 2024	AD 2 RCGI - 11	10 JUL 2025
AD 2 RCCM - 16	22 MAR 2024	AD 2 RCFG - 34	22 MAR 2024	AD 2 RCGI - 12	22 MAR 2024

AD 2 RCGI - 13	10 JUL 2025	AD 2 RCKH - 57	21 MAR 2024	AD 2 RCKU - 9	22 MAR 2024
AD 2 RCGI - 14	22 MAR 2024	AD 2 RCKH - 58	22 MAR 2024	AD 2 RCKU - 10	03 OCT 2024
AD 2 RCGI - 15	17 APR 2025	AD 2 RCKH - 59	21 MAR 2024	AD 2 RCKU - 11	15 MAY 2025
AD 2 RCGI - 16	17 APR 2025	AD 2 RCKH - 60	22 MAR 2024	AD 2 RCKU - 12	22 MAR 2024
AD 2 RCKH - 1	25 DEC 2025	AD 2 RCKH - 61	21 MAR 2024	AD 2 RCKU - 13	25 AUG 2022
AD 2 RCKH - 2	16 MAY 2024	AD 2 RCKH - 62	22 MAR 2024	AD 2 RCKU - 14	22 MAR 2024
AD 2 RCKH - 3	06 AUG 2026	AD 2 RCKH - 63	21 MAR 2024	AD 2 RCKU - 15	25 AUG 2022
AD 2 RCKH - 4	06 AUG 2026	AD 2 RCKH - 64	22 MAR 2024	AD 2 RCKU - 16	22 MAR 2024
AD 2 RCKH - 5	06 AUG 2026	AD 2 RCKH - 65	21 MAR 2024	AD 2 RCKU - 17	23 JAN 2025
AD 2 RCKH - 6	06 AUG 2026	AD 2 RCKH - 66	22 MAR 2024	AD 2 RCKU - 18	17 APR 2025
AD 2 RCKH - 7	15 MAY 2025	AD 2 RCKH - 67	08 AUG 2024	AD 2 RCKU - 19	15 MAY 2025
AD 2 RCKH - 8	15 MAY 2025	AD 2 RCKH - 68	22 MAR 2024	AD 2 RCKU - 20	22 MAR 2024
AD 2 RCKH - 9	15 MAY 2025	AD 2 RCKH - 69	08 AUG 2024	AD 2 RCKU - 21	25 AUG 2022
AD 2 RCKH - 10	14 MAY 2026	AD 2 RCKH - 70	22 MAR 2024	AD 2 RCKU - 22	22 MAR 2024
AD 2 RCKH - 11	06 AUG 2026	AD 2 RCKH - 71	21 MAR 2024	AD 2 RCKU - 23	15 MAY 2025
AD 2 RCKH - 12	06 AUG 2026	AD 2 RCKH - 72	22 MAR 2024	AD 2 RCKU - 24	22 MAR 2024
AD 2 RCKH - 13	06 AUG 2026	AD 2 RCKH - 73	21 MAR 2024	AD 2 RCKU - 25	16 MAY 2024
AD 2 RCKH - 14	06 AUG 2026	AD 2 RCKH - 74	22 MAR 2024	AD 2 RCKU - 26	22 MAR 2024
AD 2 RCKH - 15	06 AUG 2026	AD 2 RCKH - 75	08 AUG 2024	AD 2 RCKU - 27	16 MAY 2024
AD 2 RCKH - 16	10 JUL 2025	AD 2 RCKH - 76	22 MAR 2024	AD 2 RCKU - 28	22 MAR 2024
AD 2 RCKH - 17	06 AUG 2026	AD 2 RCKH - 77	08 AUG 2024	AD 2 RCKU - 29	15 MAY 2025
AD 2 RCKH - 18	06 AUG 2026	AD 2 RCKH - 78	22 MAR 2024	AD 2 RCKU - 30	22 MAR 2024
AD 2 RCKH - 19	06 AUG 2026	AD 2 RCKH - 79	21 MAR 2024	AD 2 RCKU - 31	16 MAY 2024
AD 2 RCKH - 20	06 AUG 2026	AD 2 RCKH - 80	22 MAR 2024	AD 2 RCKU - 32	22 MAR 2024
AD 2 RCKH - 21	06 AUG 2026	AD 2 RCKH - 81	08 AUG 2024	AD 2 RCKU - 33	16 MAY 2024
AD 2 RCKH - 22	06 AUG 2026	AD 2 RCKH - 82	22 MAR 2024	AD 2 RCKU - 34	22 MAR 2024
AD 2 RCKH - 23	06 AUG 2026	AD 2 RCKH - 83	08 AUG 2024	AD 2 RCKU - 35	16 MAY 2024
AD 2 RCKH - 24	06 AUG 2026	AD 2 RCKH - 84	22 MAR 2024	AD 2 RCKU - 36	22 MAR 2024
AD 2 RCKH - 25	06 AUG 2026	AD 2 RCKH - 85	21 MAR 2024	AD 2 RCKU - 37	16 MAY 2024
AD 2 RCKH - 26	22 MAR 2024	AD 2 RCKH - 86	22 MAR 2024	AD 2 RCKU - 38	22 MAR 2024
AD 2 RCKH - 27	06 AUG 2026	AD 2 RCKH - 87	21 MAR 2024	AD 2 RCKU - 39	16 MAY 2024
AD 2 RCKH - 28	22 MAR 2024	AD 2 RCKH - 88	22 MAR 2024	AD 2 RCKU - 40	22 MAR 2024
AD 2 RCKH - 29	25 DEC 2025	AD 2 RCKH - 89	21 MAR 2024	AD 2 RCKU - 41	16 MAY 2024
AD 2 RCKH - 30	22 MAR 2024	AD 2 RCKH - 90	22 MAR 2024	AD 2 RCKU - 42	22 MAR 2024
AD 2 RCKH - 31	21 MAR 2024	AD 2 RCKH - 91	21 MAR 2024	AD 2 RCKU - 43	16 MAY 2024
AD 2 RCKH - 32	22 MAR 2024	AD 2 RCKH - 92	22 MAR 2024	AD 2 RCKU - 44	22 MAR 2024
AD 2 RCKH - 33	21 MAR 2024	AD 2 RCKH - 93	21 MAR 2024	AD 2 RCKU - 45	16 MAY 2024
AD 2 RCKH - 34	22 MAR 2024	AD 2 RCKH - 94	22 MAR 2024	AD 2 RCKU - 46	16 MAY 2024
AD 2 RCKH - 35	21 MAR 2024	AD 2 RCKH - 95	21 MAR 2024	AD 2 RCKU - 47	16 MAY 2024
AD 2 RCKH - 36	22 MAR 2024	AD 2 RCKH - 96	22 MAR 2024	AD 2 RCKU - 48	16 MAY 2024
AD 2 RCKH - 37	21 MAR 2024	AD 2 RCKH - 97	21 MAR 2024	AD 2 RCKU - 49	16 MAY 2024
AD 2 RCKH - 38	22 MAR 2024	AD 2 RCKH - 98	22 MAR 2024	AD 2 RCKU - 50	16 MAY 2024
AD 2 RCKH - 39	21 MAR 2024	AD 2 RCKH - 99	25 AUG 2022	AD 2 RCKU - 51	17 APR 2025
AD 2 RCKH - 40	22 MAR 2024	AD 2 RCKH - 100	22 MAR 2024	AD 2 RCKU - 52	17 APR 2025
AD 2 RCKH - 41	21 MAR 2024	AD 2 RCKH - 101	25 JAN 2024	AD 2 RCKW - 1	19 MAR 2026
AD 2 RCKH - 42	22 MAR 2024	AD 2 RCKH - 102	22 MAR 2024	AD 2 RCKW - 2	22 MAR 2024
AD 2 RCKH - 43	21 MAR 2024	AD 2 RCKH - 103	25 JAN 2024	AD 2 RCKW - 3	28 NOV 2024
AD 2 RCKH - 44	22 MAR 2024	AD 2 RCKH - 104	22 MAR 2024	AD 2 RCKW - 4	22 MAR 2024
AD 2 RCKH - 45	21 MAR 2024	AD 2 RCKH - 105	16 MAY 2024	AD 2 RCKW - 5	14 MAY 2026
AD 2 RCKH - 46	22 MAR 2024	AD 2 RCKH - 106	22 MAR 2024	AD 2 RCKW - 6	06 AUG 2026
AD 2 RCKH - 47	21 MAR 2024	AD 2 RCKH - 107	17 APR 2025	AD 2 RCKW - 7	19 MAR 2026
AD 2 RCKH - 48	22 MAR 2024	AD 2 RCKH - 108	17 APR 2025	AD 2 RCKW - 8	28 NOV 2024
AD 2 RCKH - 49	21 MAR 2024	AD 2 RCKU - 1	15 MAY 2025	AD 2 RCKW - 9	22 MAR 2024
AD 2 RCKH - 50	22 MAR 2024	AD 2 RCKU - 2	22 MAR 2024	AD 2 RCKW - 10	06 AUG 2026
AD 2 RCKH - 51	21 MAR 2024	AD 2 RCKU - 3	15 MAY 2025	AD 2 RCKW - 11	06 AUG 2026
AD 2 RCKH - 52	22 MAR 2024	AD 2 RCKU - 4	15 MAY 2025	AD 2 RCKW - 12	22 MAR 2024
AD 2 RCKH - 53	21 MAR 2024	AD 2 RCKU - 5	06 AUG 2026	AD 2 RCKW - 13	14 MAY 2026
AD 2 RCKH - 54	22 MAR 2024	AD 2 RCKU - 6	06 AUG 2026	AD 2 RCKW - 14	22 MAR 2024
AD 2 RCKH - 55	21 MAR 2024	AD 2 RCKU - 7	19 MAR 2026	AD 2 RCKW - 15	14 MAY 2026
AD 2 RCKH - 56	22 MAR 2024	AD 2 RCKU - 8	22 MAR 2024	AD 2 RCKW - 16	22 MAR 2024

AD 2 RCKW - 17	07 SEPT 2023	AD 2 RCMQ - 37	30 NOV 2023	AD 2 RCMT - 39	25 AUG 2022
AD 2 RCKW - 18	22 MAR 2024	AD 2 RCMQ - 38	22 MAR 2024	AD 2 RCMT - 40	22 MAR 2024
AD 2 RCKW - 19	17 APR 2025	AD 2 RCMQ - 39	30 NOV 2023	AD 2 RCMT - 41	25 AUG 2022
AD 2 RCKW - 20	17 APR 2025	AD 2 RCMQ - 40	22 MAR 2024	AD 2 RCMT - 42	22 MAR 2024
AD 2 RCLY - 1	10 JUL 2025	AD 2 RCMQ - 41	30 NOV 2023	AD 2 RCMT - 43	17 APR 2025
AD 2 RCLY - 2	22 MAR 2024	AD 2 RCMQ - 42	22 MAR 2024	AD 2 RCMT - 44	17 APR 2025
AD 2 RCLY - 3	28 NOV 2024	AD 2 RCMQ - 43	30 NOV 2023	AD 2 RCNN - 1	10 JUL 2025
AD 2 RCLY - 4	08 AUG 2024	AD 2 RCMQ - 44	22 MAR 2024	AD 2 RCNN - 2	22 MAR 2024
AD 2 RCLY - 5	14 MAY 2026	AD 2 RCMQ - 45	30 NOV 2023	AD 2 RCNN - 3	28 NOV 2024
AD 2 RCLY - 6	06 AUG 2026	AD 2 RCMQ - 46	22 MAR 2024	AD 2 RCNN - 4	28 NOV 2024
AD 2 RCLY - 7	06 AUG 2026	AD 2 RCMQ - 47	30 NOV 2023	AD 2 RCNN - 5	06 AUG 2026
AD 2 RCLY - 8	19 MAR 2026	AD 2 RCMQ - 48	22 MAR 2024	AD 2 RCNN - 6	28 NOV 2024
AD 2 RCLY - 9	08 AUG 2024	AD 2 RCMQ - 49	30 NOV 2023	AD 2 RCNN - 7	06 AUG 2026
AD 2 RCLY - 10	22 MAR 2024	AD 2 RCMQ - 50	22 MAR 2024	AD 2 RCNN - 8	19 MAR 2026
AD 2 RCLY - 11	25 AUG 2022	AD 2 RCMQ - 51	30 NOV 2023	AD 2 RCNN - 9	06 AUG 2026
AD 2 RCLY - 12	22 MAR 2024	AD 2 RCMQ - 52	22 MAR 2024	AD 2 RCNN - 10	06 AUG 2026
AD 2 RCLY - 13	22 MAR 2024	AD 2 RCMQ - 53	30 NOV 2023	AD 2 RCNN - 11	06 AUG 2026
AD 2 RCLY - 14	22 MAR 2024	AD 2 RCMQ - 54	22 MAR 2024	AD 2 RCNN - 12	06 AUG 2026
AD 2 RCLY - 15	10 JUL 2025	AD 2 RCMQ - 55	06 AUG 2026	AD 2 RCNN - 13	06 AUG 2026
AD 2 RCLY - 16	22 MAR 2024	AD 2 RCMQ - 56	22 MAR 2024	AD 2 RCNN - 14	06 AUG 2026
AD 2 RCLY - 17	10 JUL 2025	AD 2 RCMQ - 57	17 APR 2025	AD 2 RCNN - 15	06 AUG 2026
AD 2 RCLY - 18	22 MAR 2024	AD 2 RCMQ - 58	17 APR 2025	AD 2 RCNN - 16	06 AUG 2026
AD 2 RCLY - 19	17 APR 2025	AD 2 RCMT - 1	06 AUG 2026	AD 2 RCNN - 17	06 AUG 2026
AD 2 RCLY - 20	17 APR 2025	AD 2 RCMT - 2	22 MAR 2024	AD 2 RCNN - 18	06 AUG 2026
AD 2 RCMQ - 1	10 JUL 2025	AD 2 RCMT - 3	15 MAY 2025	AD 2 RCNN - 19	06 AUG 2026
AD 2 RCMQ - 2	22 MAR 2024	AD 2 RCMT - 4	08 AUG 2024	AD 2 RCNN - 20	06 AUG 2026
AD 2 RCMQ - 3	25 DEC 2025	AD 2 RCMT - 5	14 MAY 2026	AD 2 RCNN - 21	06 AUG 2026
AD 2 RCMQ - 4	25 DEC 2025	AD 2 RCMT - 6	15 MAY 2025	AD 2 RCNN - 22	22 MAR 2024
AD 2 RCMQ - 5	25 DEC 2025	AD 2 RCMT - 7	06 AUG 2026	AD 2 RCNN - 23	25 AUG 2022
AD 2 RCMQ - 6	25 DEC 2025	AD 2 RCMT - 8	19 MAR 2026	AD 2 RCNN - 24	22 MAR 2024
AD 2 RCMQ - 7	25 DEC 2025	AD 2 RCMT - 9	22 MAR 2024	AD 2 RCNN - 25	10 JUL 2025
AD 2 RCMQ - 8	06 AUG 2026	AD 2 RCMT - 10	22 MAR 2024	AD 2 RCNN - 26	22 MAR 2024
AD 2 RCMQ - 9	25 DEC 2025	AD 2 RCMT - 11	22 MAR 2024	AD 2 RCNN - 27	19 MAR 2026
AD 2 RCMQ - 10	06 AUG 2026	AD 2 RCMT - 12	22 MAR 2024	AD 2 RCNN - 28	22 MAR 2024
AD 2 RCMQ - 11	19 MAR 2026	AD 2 RCMT - 13	22 MAR 2024	AD 2 RCNN - 29	19 MAR 2026
AD 2 RCMQ - 12	25 DEC 2025	AD 2 RCMT - 14	17 APR 2025	AD 2 RCNN - 30	22 MAR 2024
AD 2 RCMQ - 13	25 DEC 2025	AD 2 RCMT - 15	22 MAR 2024	AD 2 RCNN - 31	19 MAR 2026
AD 2 RCMQ - 14	25 DEC 2025	AD 2 RCMT - 16	22 MAR 2024	AD 2 RCNN - 32	22 MAR 2024
AD 2 RCMQ - 15	25 DEC 2025	AD 2 RCMT - 17	06 AUG 2026	AD 2 RCNN - 33	19 MAR 2026
AD 2 RCMQ - 16	25 DEC 2025	AD 2 RCMT - 18	22 MAR 2024	AD 2 RCNN - 34	22 MAR 2024
AD 2 RCMQ - 17	25 DEC 2025	AD 2 RCMT - 19	25 AUG 2022	AD 2 RCNN - 35	19 MAR 2026
AD 2 RCMQ - 18	22 MAR 2024	AD 2 RCMT - 20	22 MAR 2024	AD 2 RCNN - 36	22 MAR 2024
AD 2 RCMQ - 19	25 DEC 2025	AD 2 RCMT - 21	06 AUG 2026	AD 2 RCNN - 37	19 MAR 2026
AD 2 RCMQ - 20	22 MAR 2024	AD 2 RCMT - 22	22 MAR 2024	AD 2 RCNN - 38	22 MAR 2024
AD 2 RCMQ - 21	10 JUL 2025	AD 2 RCMT - 23	25 AUG 2022	AD 2 RCNN - 39	19 MAR 2026
AD 2 RCMQ - 22	22 MAR 2024	AD 2 RCMT - 24	22 MAR 2024	AD 2 RCNN - 40	22 MAR 2024
AD 2 RCMQ - 23	30 NOV 2023	AD 2 RCMT - 25	25 AUG 2022	AD 2 RCNN - 41	19 MAR 2026
AD 2 RCMQ - 24	22 MAR 2024	AD 2 RCMT - 26	22 MAR 2024	AD 2 RCNN - 42	22 MAR 2024
AD 2 RCMQ - 25	30 NOV 2023	AD 2 RCMT - 27	25 AUG 2022	AD 2 RCNN - 43	19 MAR 2026
AD 2 RCMQ - 26	22 MAR 2024	AD 2 RCMT - 28	22 MAR 2024	AD 2 RCNN - 44	22 MAR 2024
AD 2 RCMQ - 27	30 NOV 2023	AD 2 RCMT - 29	25 AUG 2022	AD 2 RCNN - 45	19 MAR 2026
AD 2 RCMQ - 28	22 MAR 2024	AD 2 RCMT - 30	22 MAR 2024	AD 2 RCNN - 46	22 MAR 2024
AD 2 RCMQ - 29	30 NOV 2023	AD 2 RCMT - 31	25 AUG 2022	AD 2 RCNN - 47	19 MAR 2026
AD 2 RCMQ - 30	22 MAR 2024	AD 2 RCMT - 32	22 MAR 2024	AD 2 RCNN - 48	22 MAR 2024
AD 2 RCMQ - 31	30 NOV 2023	AD 2 RCMT - 33	25 AUG 2022	AD 2 RCNN - 49	16 MAY 2024
AD 2 RCMQ - 32	22 MAR 2024	AD 2 RCMT - 34	22 MAR 2024	AD 2 RCNN - 50	22 MAR 2024
AD 2 RCMQ - 33	30 NOV 2023	AD 2 RCMT - 35	25 AUG 2022	AD 2 RCNN - 51	25 AUG 2022
AD 2 RCMQ - 34	22 MAR 2024	AD 2 RCMT - 36	22 MAR 2024	AD 2 RCNN - 52	22 MAR 2024
AD 2 RCMQ - 35	30 NOV 2023	AD 2 RCMT - 37	25 AUG 2022	AD 2 RCNN - 53	25 AUG 2022
AD 2 RCMQ - 36	22 MAR 2024	AD 2 RCMT - 38	22 MAR 2024	AD 2 RCNN - 54	22 MAR 2024

AD 2 RCNN - 55	17 APR 2025	AD 2 RCSP - 5	06 AUG 2026	AD 2 RCSS - 57	02 NOV 2023
AD 2 RCNN - 56	17 APR 2025	AD 2 RCSP - 6	19 MAR 2026	AD 2 RCSS - 58	22 MAR 2024
AD 2 RCQC - 1	04 SEPT 2025	AD 2 RCSP - 7	22 MAR 2024	AD 2 RCSS - 59	02 NOV 2023
AD 2 RCQC - 2	22 MAR 2024	AD 2 RCSP - 8	17 APR 2025	AD 2 RCSS - 60	22 MAR 2024
AD 2 RCQC - 3	25 DEC 2025	AD 2 RCSS - 1	15 MAY 2025	AD 2 RCSS - 61	02 NOV 2023
AD 2 RCQC - 4	25 DEC 2025	AD 2 RCSS - 2	22 MAR 2024	AD 2 RCSS - 62	22 MAR 2024
AD 2 RCQC - 5	06 AUG 2026	AD 2 RCSS - 3	28 NOV 2024	AD 2 RCSS - 63	02 NOV 2023
AD 2 RCQC - 6	28 NOV 2024	AD 2 RCSS - 4	10 JUL 2025	AD 2 RCSS - 64	22 MAR 2024
AD 2 RCQC - 7	06 AUG 2026	AD 2 RCSS - 5	19 MAR 2026	AD 2 RCSS - 65	02 NOV 2023
AD 2 RCQC - 8	19 MAR 2026	AD 2 RCSS - 6	19 MAR 2026	AD 2 RCSS - 66	22 MAR 2024
AD 2 RCQC - 9	22 MAR 2024	AD 2 RCSS - 7	28 NOV 2024	AD 2 RCSS - 67	02 NOV 2023
AD 2 RCQC - 10	22 MAR 2024	AD 2 RCSS - 8	22 MAR 2024	AD 2 RCSS - 68	22 MAR 2024
AD 2 RCQC - 11	22 MAR 2024	AD 2 RCSS - 9	22 MAR 2024	AD 2 RCSS - 69	02 NOV 2023
AD 2 RCQC - 12	22 MAR 2024	AD 2 RCSS - 10	22 MAR 2024	AD 2 RCSS - 70	22 MAR 2024
AD 2 RCQC - 13	22 MAR 2024	AD 2 RCSS - 11	22 MAR 2024	AD 2 RCSS - 71	02 NOV 2023
AD 2 RCQC - 14	22 MAR 2024	AD 2 RCSS - 12	22 MAR 2024	AD 2 RCSS - 72	22 MAR 2024
AD 2 RCQC - 15	22 MAR 2024	AD 2 RCSS - 13	22 MAR 2024	AD 2 RCSS - 73	02 NOV 2023
AD 2 RCQC - 16	22 MAR 2024	AD 2 RCSS - 14	14 MAY 2026	AD 2 RCSS - 74	02 NOV 2023
AD 2 RCQC - 17	04 SEPT 2025	AD 2 RCSS - 15	06 AUG 2026	AD 2 RCSS - 75	02 NOV 2023
AD 2 RCQC - 18	22 MAR 2024	AD 2 RCSS - 16	19 MAR 2026	AD 2 RCSS - 76	22 MAR 2024
AD 2 RCQC - 19	08 AUG 2024	AD 2 RCSS - 17	22 MAR 2024	AD 2 RCSS - 77	02 NOV 2023
AD 2 RCQC - 20	22 MAR 2024	AD 2 RCSS - 18	22 MAR 2024	AD 2 RCSS - 78	22 MAR 2024
AD 2 RCQC - 21	04 SEPT 2025	AD 2 RCSS - 19	22 MAR 2024	AD 2 RCSS - 79	02 NOV 2023
AD 2 RCQC - 22	22 MAR 2024	AD 2 RCSS - 20	25 DEC 2025	AD 2 RCSS - 80	22 MAR 2024
AD 2 RCQC - 23	30 NOV 2023	AD 2 RCSS - 21	22 MAR 2024	AD 2 RCSS - 81	02 NOV 2023
AD 2 RCQC - 24	22 MAR 2024	AD 2 RCSS - 22	03 OCT 2024	AD 2 RCSS - 82	22 MAR 2024
AD 2 RCQC - 25	30 NOV 2023	AD 2 RCSS - 23	03 OCT 2024	AD 2 RCSS - 83	02 NOV 2023
AD 2 RCQC - 26	22 MAR 2024	AD 2 RCSS - 24	22 MAR 2024	AD 2 RCSS - 84	22 MAR 2024
AD 2 RCQC - 27	30 NOV 2023	AD 2 RCSS - 25	22 MAR 2024	AD 2 RCSS - 85	02 NOV 2023
AD 2 RCQC - 28	22 MAR 2024	AD 2 RCSS - 26	22 MAR 2024	AD 2 RCSS - 86	22 MAR 2024
AD 2 RCQC - 29	30 NOV 2023	AD 2 RCSS - 27	25 AUG 2022	AD 2 RCSS - 87	02 NOV 2023
AD 2 RCQC - 30	22 MAR 2024	AD 2 RCSS - 28	22 MAR 2024	AD 2 RCSS - 88	22 MAR 2024
AD 2 RCQC - 31	30 NOV 2023	AD 2 RCSS - 29	25 AUG 2022	AD 2 RCSS - 89	02 NOV 2023
AD 2 RCQC - 32	22 MAR 2024	AD 2 RCSS - 30	22 MAR 2024	AD 2 RCSS - 90	22 MAR 2024
AD 2 RCQC - 33	30 NOV 2023	AD 2 RCSS - 31	14 MAY 2026	AD 2 RCSS - 91	02 NOV 2023
AD 2 RCQC - 34	22 MAR 2024	AD 2 RCSS - 32	14 MAY 2026	AD 2 RCSS - 92	22 MAR 2024
AD 2 RCQC - 35	30 NOV 2023	AD 2 RCSS - 33	17 APR 2025	AD 2 RCSS - 93	02 NOV 2023
AD 2 RCQC - 36	22 MAR 2024	AD 2 RCSS - 34	17 APR 2025	AD 2 RCSS - 94	22 MAR 2024
AD 2 RCQC - 37	30 NOV 2023	AD 2 RCSS - 35	17 APR 2025	AD 2 RCSS - 95	02 NOV 2023
AD 2 RCQC - 38	22 MAR 2024	AD 2 RCSS - 36	22 MAR 2024	AD 2 RCSS - 96	22 MAR 2024
AD 2 RCQC - 39	30 NOV 2023	AD 2 RCSS - 37	15 MAY 2025	AD 2 RCSS - 97	02 NOV 2023
AD 2 RCQC - 40	22 MAR 2024	AD 2 RCSS - 38	22 MAR 2024	AD 2 RCSS - 98	22 MAR 2024
AD 2 RCQC - 41	30 NOV 2023	AD 2 RCSS - 39	25 AUG 2022	AD 2 RCSS - 99	02 NOV 2023
AD 2 RCQC - 42	22 MAR 2024	AD 2 RCSS - 40	22 MAR 2024	AD 2 RCSS - 100	22 MAR 2024
AD 2 RCQC - 43	30 NOV 2023	AD 2 RCSS - 41	15 MAY 2025	AD 2 RCSS - 101	02 NOV 2023
AD 2 RCQC - 44	22 MAR 2024	AD 2 RCSS - 42	22 MAR 2024	AD 2 RCSS - 102	22 MAR 2024
AD 2 RCQC - 45	30 NOV 2023	AD 2 RCSS - 43	02 NOV 2023	AD 2 RCSS - 103	16 MAY 2024
AD 2 RCQC - 46	22 MAR 2024	AD 2 RCSS - 44	22 MAR 2024	AD 2 RCSS - 104	22 MAR 2024
AD 2 RCQC - 47	30 NOV 2023	AD 2 RCSS - 45	02 NOV 2023	AD 2 RCSS - 105	17 APR 2025
AD 2 RCQC - 48	22 MAR 2024	AD 2 RCSS - 46	22 MAR 2024	AD 2 RCSS - 106	17 APR 2025
AD 2 RCQC - 49	30 NOV 2023	AD 2 RCSS - 47	02 NOV 2023	AD 2 RCSS - 107	17 APR 2025
AD 2 RCQC - 50	22 MAR 2024	AD 2 RCSS - 48	22 MAR 2024	AD 2 RCSS - 108	17 APR 2025
AD 2 RCQC - 51	06 AUG 2026	AD 2 RCSS - 49	02 NOV 2023	AD 2 RCTP - 1	17 APR 2025
AD 2 RCQC - 52	08 AUG 2024	AD 2 RCSS - 50	22 MAR 2024	AD 2 RCTP - 2	14 JUL 2026
AD 2 RCQC - 53	17 APR 2025	AD 2 RCSS - 51	02 NOV 2023	AD 2 RCTP - 3	10 JUL 2025
AD 2 RCQC - 54	17 APR 2025	AD 2 RCSS - 52	22 MAR 2024	AD 2 RCTP - 4	10 JUL 2025
AD 2 RCSP - 1	22 MAR 2024	AD 2 RCSS - 53	02 NOV 2023	AD 2 RCTP - 5	10 JUL 2025
AD 2 RCSP - 2	22 MAR 2024	AD 2 RCSS - 54	22 MAR 2024	AD 2 RCTP - 6	10 JUL 2025
AD 2 RCSP - 3	22 MAR 2024	AD 2 RCSS - 55	02 NOV 2023	AD 2 RCTP - 7	10 JUL 2025
AD 2 RCSP - 4	22 MAR 2024	AD 2 RCSS - 56	22 MAR 2024	AD 2 RCTP - 8	10 JUL 2025

AD 2 RCTP - 9	10 JUL 2025	AD 2 RCTP - 69	25 AUG 2022	AD 2 RCTP - 129	25 AUG 2022
AD 2 RCTP - 10	19 MAR 2026	AD 2 RCTP - 70	22 MAR 2024	AD 2 RCTP - 130	22 MAR 2024
AD 2 RCTP - 11	19 MAR 2026	AD 2 RCTP - 71	25 AUG 2022	AD 2 RCTP - 131	25 AUG 2022
AD 2 RCTP - 12	19 MAR 2026	AD 2 RCTP - 72	22 MAR 2024	AD 2 RCTP - 132	22 MAR 2024
AD 2 RCTP - 13	19 MAR 2026	AD 2 RCTP - 73	25 AUG 2022	AD 2 RCTP - 133	25 AUG 2022
AD 2 RCTP - 14	19 MAR 2026	AD 2 RCTP - 74	25 AUG 2022	AD 2 RCTP - 134	22 MAR 2024
AD 2 RCTP - 15	14 MAY 2026	AD 2 RCTP - 75	02 NOV 2023	AD 2 RCTP - 135	25 AUG 2022
AD 2 RCTP - 16	06 AUG 2026	AD 2 RCTP - 76	22 MAR 2024	AD 2 RCTP - 136	22 MAR 2024
AD 2 RCTP - 17	14 MAY 2026	AD 2 RCTP - 77	25 AUG 2022	AD 2 RCTP - 137	25 AUG 2022
AD 2 RCTP - 18	14 MAY 2026	AD 2 RCTP - 78	22 MAR 2024	AD 2 RCTP - 138	22 MAR 2024
AD 2 RCTP - 19	19 MAR 2026	AD 2 RCTP - 79	02 NOV 2023	AD 2 RCTP - 139	25 AUG 2022
AD 2 RCTP - 20	19 MAR 2026	AD 2 RCTP - 80	22 MAR 2024	AD 2 RCTP - 140	22 MAR 2024
AD 2 RCTP - 21	19 MAR 2026	AD 2 RCTP - 81	25 AUG 2022	AD 2 RCTP - 141	25 AUG 2022
AD 2 RCTP - 22	19 MAR 2026	AD 2 RCTP - 82	22 MAR 2024	AD 2 RCTP - 142	22 MAR 2024
AD 2 RCTP - 23	14 MAY 2026	AD 2 RCTP - 83	02 NOV 2023	AD 2 RCTP - 143	25 AUG 2022
AD 2 RCTP - 24	14 MAY 2026	AD 2 RCTP - 84	22 MAR 2024	AD 2 RCTP - 144	22 MAR 2024
AD 2 RCTP - 25	14 MAY 2026	AD 2 RCTP - 85	25 AUG 2022	AD 2 RCTP - 145	08 AUG 2024
AD 2 RCTP - 26	14 MAY 2026	AD 2 RCTP - 86	25 AUG 2022	AD 2 RCTP - 146	22 MAR 2024
AD 2 RCTP - 27	14 MAY 2026	AD 2 RCTP - 87	02 NOV 2023	AD 2 RCTP - 147	25 AUG 2022
AD 2 RCTP - 28	14 MAY 2026	AD 2 RCTP - 88	22 MAR 2024	AD 2 RCTP - 148	22 MAR 2024
AD 2 RCTP - 29	14 MAY 2026	AD 2 RCTP - 89	25 AUG 2022	AD 2 RCTP - 149	08 AUG 2024
AD 2 RCTP - 30	14 MAY 2026	AD 2 RCTP - 90	25 AUG 2022	AD 2 RCTP - 150	22 MAR 2024
AD 2 RCTP - 31	14 MAY 2026	AD 2 RCTP - 91	02 NOV 2023	AD 2 RCTP - 151	25 AUG 2022
AD 2 RCTP - 32	14 MAY 2026	AD 2 RCTP - 92	22 MAR 2024	AD 2 RCTP - 152	22 MAR 2024
AD 2 RCTP - 33	14 MAY 2026	AD 2 RCTP - 93	25 AUG 2022	AD 2 RCTP - 153	08 AUG 2024
AD 2 RCTP - 34	14 MAY 2026	AD 2 RCTP - 94	22 MAR 2024	AD 2 RCTP - 154	22 MAR 2024
AD 2 RCTP - 35	14 MAY 2026	AD 2 RCTP - 95	02 NOV 2023	AD 2 RCTP - 155	25 AUG 2022
AD 2 RCTP - 36	14 MAY 2026	AD 2 RCTP - 96	22 MAR 2024	AD 2 RCTP - 156	22 MAR 2024
AD 2 RCTP - 37	14 MAY 2026	AD 2 RCTP - 97	25 AUG 2022	AD 2 RCTP - 157	08 AUG 2024
AD 2 RCTP - 38	22 MAR 2024	AD 2 RCTP - 98	22 MAR 2024	AD 2 RCTP - 158	22 MAR 2024
AD 2 RCTP - 39	25 DEC 2025	AD 2 RCTP - 99	02 NOV 2023	AD 2 RCTP - 159	16 MAY 2024
AD 2 RCTP - 40	22 MAR 2024	AD 2 RCTP - 100	22 MAR 2024	AD 2 RCTP - 160	22 MAR 2024
AD 2 RCTP - 41	25 DEC 2025	AD 2 RCTP - 101	25 AUG 2022	AD 2 RCTP - 161	17 APR 2025
AD 2 RCTP - 42	22 MAR 2024	AD 2 RCTP - 102	22 MAR 2024	AD 2 RCTP - 162	17 APR 2025
AD 2 RCTP - 43	25 AUG 2022	AD 2 RCTP - 103	02 NOV 2023	AD 2 RCWA - 1	10 JUL 2025
AD 2 RCTP - 44	22 MAR 2024	AD 2 RCTP - 104	22 MAR 2024	AD 2 RCWA - 2	22 MAR 2024
AD 2 RCTP - 45	10 JUL 2025	AD 2 RCTP - 105	25 AUG 2022	AD 2 RCWA - 3	28 NOV 2024
AD 2 RCTP - 46	22 MAR 2024	AD 2 RCTP - 106	22 MAR 2024	AD 2 RCWA - 4	22 MAR 2024
AD 2 RCTP - 47	10 JUL 2025	AD 2 RCTP - 107	02 NOV 2023	AD 2 RCWA - 5	14 MAY 2026
AD 2 RCTP - 48	22 MAR 2024	AD 2 RCTP - 108	22 MAR 2024	AD 2 RCWA - 6	06 AUG 2026
AD 2 RCTP - 49	10 JUL 2025	AD 2 RCTP - 109	25 AUG 2022	AD 2 RCWA - 7	15 MAY 2025
AD 2 RCTP - 50	22 MAR 2024	AD 2 RCTP - 110	25 AUG 2022	AD 2 RCWA - 8	19 MAR 2026
AD 2 RCTP - 51	10 JUL 2025	AD 2 RCTP - 111	02 NOV 2023	AD 2 RCWA - 9	22 MAR 2024
AD 2 RCTP - 52	22 MAR 2024	AD 2 RCTP - 112	22 MAR 2024	AD 2 RCWA - 10	22 MAR 2024
AD 2 RCTP - 53	10 JUL 2025	AD 2 RCTP - 113	25 AUG 2022	AD 2 RCWA - 11	22 MAR 2024
AD 2 RCTP - 54	22 MAR 2024	AD 2 RCTP - 114	25 AUG 2022	AD 2 RCWA - 12	22 MAR 2024
AD 2 RCTP - 55	10 JUL 2025	AD 2 RCTP - 115	03 OCT 2024	AD 2 RCWA - 13	25 DEC 2025
AD 2 RCTP - 56	22 MAR 2024	AD 2 RCTP - 116	22 MAR 2024	AD 2 RCWA - 14	22 MAR 2024
AD 2 RCTP - 57	17 APR 2025	AD 2 RCTP - 117	25 AUG 2022	AD 2 RCWA - 15	10 JUL 2025
AD 2 RCTP - 58	22 MAR 2024	AD 2 RCTP - 118	25 AUG 2022	AD 2 RCWA - 16	22 MAR 2024
AD 2 RCTP - 59	17 APR 2025	AD 2 RCTP - 119	25 AUG 2022	AD 2 RCWA - 17	25 AUG 2022
AD 2 RCTP - 60	22 MAR 2024	AD 2 RCTP - 120	22 MAR 2024	AD 2 RCWA - 18	22 MAR 2024
AD 2 RCTP - 61	25 AUG 2022	AD 2 RCTP - 121	25 AUG 2022	AD 2 RCWA - 19	25 AUG 2022
AD 2 RCTP - 62	22 MAR 2024	AD 2 RCTP - 122	22 MAR 2024	AD 2 RCWA - 20	22 MAR 2024
AD 2 RCTP - 63	25 AUG 2022	AD 2 RCTP - 123	25 AUG 2022	AD 2 RCWA - 21	25 AUG 2022
AD 2 RCTP - 64	22 MAR 2024	AD 2 RCTP - 124	22 MAR 2024	AD 2 RCWA - 22	22 MAR 2024
AD 2 RCTP - 65	25 AUG 2022	AD 2 RCTP - 125	25 AUG 2022	AD 2 RCWA - 23	17 APR 2025
AD 2 RCTP - 66	22 MAR 2024	AD 2 RCTP - 126	22 MAR 2024	AD 2 RCWA - 24	17 APR 2025
AD 2 RCTP - 67	03 OCT 2024	AD 2 RCTP - 127	25 AUG 2022	AD 2 RCYU - 1	10 JUL 2025
AD 2 RCTP - 68	22 MAR 2024	AD 2 RCTP - 128	22 MAR 2024	AD 2 RCYU - 2	22 MAR 2024

AD 2 RCUY - 3	10 JUL 2025	AD 3			AD 3.14 - 5	25 AUG 2022
AD 2 RCUY - 4	22 MAR 2024				AD 3.14 - 6	22 MAR 2024
AD 2 RCUY - 5	06 AUG 2026		AD 3.1 - 1	22 MAR 2024	AD 3.15 - 1	22 MAR 2024
AD 2 RCUY - 6	17 APR 2025		AD 3.1 - 2	22 MAR 2024	AD 3.15 - 2	22 MAR 2024
AD 2 RCUY - 7	06 AUG 2026		AD 3.2 - 1	22 MAR 2024	AD 3.15 - 3	25 AUG 2022
AD 2 RCUY - 8	19 MAR 2026		AD 3.2 - 2	22 MAR 2024	AD 3.15 - 4	22 MAR 2024
AD 2 RCUY - 9	22 MAR 2024		AD 3.3 - 1	22 MAR 2024	AD 3.15 - 5	25 AUG 2022
AD 2 RCUY - 10	22 MAR 2024		AD 3.3 - 2	22 MAR 2024	AD 3.15 - 6	22 MAR 2024
AD 2 RCUY - 11	22 MAR 2024		AD 3.4 - 1	22 MAR 2024	AD 3.15 - 7	25 AUG 2022
AD 2 RCUY - 12	22 MAR 2024		AD 3.4 - 2	22 MAR 2024	AD 3.15 - 8	22 MAR 2024
AD 2 RCUY - 13	20 OCT 2022		AD 3.5 - 1	22 MAR 2024		
AD 2 RCUY - 14	22 MAR 2024		AD 3.5 - 2	22 MAR 2024		
AD 2 RCUY - 15	25 AUG 2022		AD 3.6 - 1	22 MAR 2024		
AD 2 RCUY - 16	22 MAR 2024		AD 3.6 - 2	22 MAR 2024		
AD 2 RCUY - 17	22 MAR 2024		AD 3.6 - 3	22 MAR 2024		
AD 2 RCUY - 18	10 JUL 2025		AD 3.6 - 4	22 MAR 2024		
AD 2 RCUY - 19	15 MAY 2025		AD 3.7 - 1	22 MAR 2024		
AD 2 RCUY - 20	22 MAR 2024		AD 3.7 - 2	22 MAR 2024		
AD 2 RCUY - 21	25 AUG 2022		AD 3.8 - 1	22 MAR 2024		
AD 2 RCUY - 22	22 MAR 2024		AD 3.8 - 2	22 MAR 2024		
AD 2 RCUY - 23	15 MAY 2025		AD 3.9 - 1	23 JAN 2025		
AD 2 RCUY - 24	22 MAR 2024		AD 3.9 - 2	23 JAN 2025		
AD 2 RCUY - 25	25 AUG 2022		AD 3.9 - 3	23 JAN 2025		
AD 2 RCUY - 26	22 MAR 2024		AD 3.9 - 4	23 JAN 2025		
AD 2 RCUY - 27	25 AUG 2022		AD 3.10 - 1	22 MAR 2024		
AD 2 RCUY - 28	22 MAR 2024		AD 3.10 - 2	22 MAR 2024		
AD 2 RCUY - 29	25 AUG 2022		AD 3.10 - 3	22 MAR 2024		
AD 2 RCUY - 30	22 MAR 2024		AD 3.10 - 4	22 MAR 2024		
AD 2 RCUY - 31	25 AUG 2022		AD 3.11 - 1	22 MAR 2024		
AD 2 RCUY - 32	22 MAR 2024		AD 3.11 - 2	22 MAR 2024		
AD 2 RCUY - 33	25 AUG 2022		AD 3.11 - 3	22 MAR 2024		
AD 2 RCUY - 34	22 MAR 2024		AD 3.11 - 4	22 MAR 2024		
AD 2 RCUY - 35	25 AUG 2022		AD 3.11 - 5	25 AUG 2022		
AD 2 RCUY - 36	22 MAR 2024		AD 3.11 - 6	22 MAR 2024		
AD 2 RCUY - 37	25 AUG 2022		AD 3.11 - 7	25 AUG 2022		
AD 2 RCUY - 38	22 MAR 2024		AD 3.11 - 8	22 MAR 2024		
AD 2 RCUY - 39	25 AUG 2022		AD 3.11 - 9	25 AUG 2022		
AD 2 RCUY - 40	22 MAR 2024		AD 3.11 - 10	22 MAR 2024		
AD 2 RCUY - 41	25 AUG 2022		AD 3.11 - 11	25 AUG 2022		
AD 2 RCUY - 42	22 MAR 2024		AD 3.11 - 12	22 MAR 2024		
AD 2 RCUY - 43	25 AUG 2022		AD 3.12 - 1	22 MAR 2024		
AD 2 RCUY - 44	22 MAR 2024		AD 3.12 - 2	22 MAR 2024		
AD 2 RCUY - 45	25 AUG 2022		AD 3.12 - 3	25 AUG 2022		
AD 2 RCUY - 46	22 MAR 2024		AD 3.12 - 4	22 MAR 2024		
AD 2 RCUY - 47	25 AUG 2022		AD 3.12 - 5	25 AUG 2022		
AD 2 RCUY - 48	22 MAR 2024		AD 3.12 - 6	22 MAR 2024		
AD 2 RCUY - 49	25 AUG 2022		AD 3.12 - 7	25 AUG 2022		
AD 2 RCUY - 50	22 MAR 2024		AD 3.12 - 8	22 MAR 2024		
AD 2 RCUY - 51	25 AUG 2022		AD 3.13 - 1	22 MAR 2024		
AD 2 RCUY - 52	22 MAR 2024		AD 3.13 - 2	22 MAR 2024		
AD 2 RCUY - 53	25 AUG 2022		AD 3.13 - 3	25 AUG 2022		
AD 2 RCUY - 54	22 MAR 2024		AD 3.13 - 4	22 MAR 2024		
AD 2 RCUY - 55	25 AUG 2022		AD 3.13 - 5	25 AUG 2022		
AD 2 RCUY - 56	22 MAR 2024		AD 3.13 - 6	22 MAR 2024		
AD 2 RCUY - 57	25 AUG 2022		AD 3.13 - 7	25 AUG 2022		
AD 2 RCUY - 58	22 MAR 2024		AD 3.13 - 8	22 MAR 2024		
AD 2 RCUY - 59	16 MAY 2024		AD 3.14 - 1	22 MAR 2024		
AD 2 RCUY - 60	22 MAR 2024		AD 3.14 - 2	22 MAR 2024		
AD 2 RCUY - 61	17 APR 2025		AD 3.14 - 3	09 MAR 2023		
AD 2 RCUY - 62	17 APR 2025		AD 3.14 - 4	22 MAR 2024		

Annex 15 — Aeronautical Information Services	GEN 1.7 - 20
Annex 16 — Environmental Protection Volume I — Aircraft Noise	GEN 1.7 - 20
Annex 16 — Environmental Protection Volume II — Aircraft Engine Emissions	GEN 1.7 - 20
Annex 16 — Environmental Protection Volume III — Aeroplane CO2 Emissions	GEN 1.7 - 20
Annex 16 — Environmental Protection Volume IV — Carbon Offsetting and Reduction Scheme for International Aviation	GEN 1.7 - 21
Annex 17 — Security	GEN 1.7 - 21
Annex 18 — The Safe Transport of Dangerous Goods by Air	GEN 1.7 - 21
Annex 19 — Safety Management	GEN 1.7 - 21
Doc 4444 Procedures for Air Navigation Services — Air Traffic Management (PANS-ATM)	GEN 1.7 - 21
Doc 8168 Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS) Volume I — Flight Procedures	GEN 1.7 - 22
Doc 8168 Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS) Volume II — Construction of Visual and Instrument Flight Procedures	GEN 1.7 - 23
Doc 8168 Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS) Volume III — Aircraft Operating Procedures	GEN 1.7 - 23
GEN 2 表格及代碼/ 2 TABLES AND CODES	GEN 2.1 - 1
GEN 2.1 度量衡單位、航空器標誌、國定假日/ Measuring system, aircraft markings, legal holidays	GEN 2.1 - 1
2.1.1 度量衡單位/ UNITS OF MEASUREMENT	GEN 2.1 - 1
2.1.2 時間參考系統/ TEMPORAL REFERENCE SYSTEM	GEN 2.1 - 1
2.1.3 水平參考系統/ HORIZONTAL REFERENCE SYSTEM	GEN 2.1 - 1
2.1.4 垂直參考系統/ VERTICAL REFERENCE SYSTEM	GEN 2.1 - 2
2.1.5 航空器國籍與登記標誌/ AIRCRAFT NATIONALITY AND REGISTRATION MARKS	GEN 2.1 - 3
2.1.6 國定假日 (2026年)/ PUBLIC HOLIDAYS (2026)	GEN 2.1 - 3
GEN 2.2 航空情報出版品所用之縮語/ Abbreviations used in AIS publications	GEN 2.2 - 1
GEN 2.3 圖表符號/ Chart symbols	GEN 2.3 - 1
2.3.1 機場/ AERODROMES	GEN 2.3 - 1
2.3.2 機場圖/ AERODROME CHARTS	GEN 2.3 - 1
2.3.3 機場障礙物圖 A型B型及C型/ AERODROME OBSTACLE CHARTS-TYPE A, B AND C	GEN 2.3 - 4
2.3.4 無線電助導航設施/ RADIO NAVIGATION AIDS	GEN 2.3 - 5
2.3.5 飛航服務/ AIR TRAFFIC SERVICE	GEN 2.3 - 7
2.3.6 其他/ MISCELLANEOUS	GEN 2.3 - 8
GEN 2.4 航用地名/ Location indicators	GEN 2.4 - 1
2.4.1 地理位置 / 航用地名對照表/ ENCODE/DECODE	GEN 2.4 - 1
GEN 2.5 助航設施一覽表/ List of radio navigation aids	GEN 2.5 - 1
GEN 2.6 單位換算表/ Conversion tables	GEN 2.6 - 1
GEN 2.7 日出/日落 表/ Sunrise/Sunset tables	GEN 2.7 - 1

GEN 3.1	航空情報服務/ Aeronautical information services	GEN 3.1 - 1
3.1.1	主管機構/ RESPONSIBLE SERVICES	GEN 3.1 - 1
3.1.2	責任範圍/ AREA OF RESPONSIBILITY	GEN 3.1 - 1
3.1.3	航空情報出版品/ AERONAUTICAL PUBLICATIONS	GEN 3.1 - 1
3.1.4	航空情報定期發布制度/ AIRAC SYSTEM	GEN 3.1 - 5
3.1.5	飛航前及降落後之飛航情報服務/ PRE-FLIGHT INFORMATION AND POST-FLIGHT INFORMATION SERVICES	GEN 3.1 - 6
3.1.6	電子式地形及障礙物資料/ ELECTRONIC TERRAIN AND OBSTACLE DATA	GEN 3.1 - 7
GEN 3.2	航圖/ Aeronautical charts	GEN 3.2 - 1
3.2.1	主管機構/ RESPONSIBLE SERVICES	GEN 3.2 - 1
3.2.2	航圖之修訂/ MAINTENANCE OF CHARTS	GEN 3.2 - 1
3.2.3	航圖之購買/ PURCHASE ARRANGEMENTS	GEN 3.2 - 1
3.2.4	出版航圖類別/ AERONAUTICAL CHART SERIES AVAILABLE	GEN 3.2 - 1
3.2.5	販售航圖一覽表/ LIST OF AERONAUTICAL CHARTS AVAILABLE	GEN 3.2 - 3
GEN 3.3	飛航服務/ Air traffic services	GEN 3.3 - 1
3.3.1	主管機構/ RESPONSIBLE SERVICE	GEN 3.3 - 1
3.3.2	責任範圍/ AREA OF RESPONSIBILITY	GEN 3.3 - 1
3.3.3	服務種類/ TYPES OF SERVICES	GEN 3.3 - 1
3.3.4	航空器使用人與飛航服務單位間之協調/ CO-ORDINATION BETWEEN THE OPERATOR AND ATS	GEN 3.3 - 2
3.3.5	最低飛航高度/ MINIMUM FLIGHT ALTITUDE	GEN 3.3 - 2
3.3.6	飛航服務單位通訊錄/ ATS UNITS ADDRESS LIST	GEN 3.3 - 2
GEN 3.4	航空通信服務/ Communication services	GEN 3.4 - 1
3.4.1	主管機構/ RESPONSIBLE SERVICE	GEN 3.4 - 1
3.4.2	責任範圍/ AREA OF RESPONSIBILITY	GEN 3.4 - 1
3.4.3	服務種類/ TYPES OF SERVICE	GEN 3.4 - 1
3.4.4	通信服務之要求及條件/ REQUIREMENTS AND CONDITIONS	GEN 3.4 - 2
3.4.5	航空固定通信服務/ AERONAUTICAL FIXED SERVICE	GEN 3.4 - 2
3.4.6	資料鏈路服務/ DATA LINK SERVICE	GEN 3.4 - 5
GEN 3.5	氣象服務/ Meteorological services	GEN 3.5 - 1
3.5.1	服務提供責任單位/ RESPONSIBLE SERVICE	GEN 3.5 - 1
3.5.2	責任範圍/	

AREA OF RESPONSIBILITY	GEN 3.5 - 1
3.5.3 氣象觀測及報告/ METEOROLOGICAL OBSERVATIONS AND REPORTS	GEN 3.5 - 2
3.5.4 服務種類/ TYPES OF SERVICES	GEN 3.5 - 13
3.5.5 氣象服務之申請/ NOTIFICATION REQUIRED FROM OPERATORS	GEN 3.5 - 13
3.5.6 空中報告 (AIREP)/ AIREP	GEN 3.5 - 13
3.5.7 航空氣象資料廣播/ VOLMET SERVICE	GEN 3.5 - 14
3.5.8 顯著危害天氣(SIGMET)及低空危害天氣(AIRMET)服務/ SIGMET AND AIRMET SERVICE	GEN 3.5 - 14
3.5.9 其他自動氣象服務/ OTHER AUTOMATED METEOROLOGICAL SERVICES	GEN 3.5 - 16
GEN 3.6 搜尋與救援/ Search and rescue	GEN 3.6 - 1
3.6.1 服務提供單位/ RESPONSIBLE SERVICE(S)	GEN 3.6 - 1
3.6.2 責任範圍/ AREA OF RESPONSIBILITY	GEN 3.6 - 1
3.6.3 服務種類/ TYPES OF SERVICE	GEN 3.6 - 1
3.6.4 搜救協議/ SAR AGREEMENT	GEN 3.6 - 2
3.6.5 提供服務之條件/ CONDITIONS OF AVAILABILITY	GEN 3.6 - 3
3.6.6 使用之程序及信號/ PROCEDURES AND SIGNALS USED	GEN 3.6 - 3
GEN 4 場站及飛航服務費用/ 4 CHARGES FOR AERODROMES/HELIPORTS AND AIR NAVIGATION SERVICES	GEN 4.1 - 1
GEN 4.1 場站使用費/ Aerodrome charges	GEN 4.1 - 1
4.1.1 臺灣桃園國際機場/ TAIPEI/TAIWAN TAOYUAN INTERNATIONAL AIRPORT	GEN 4.1 - 1
4.1.2 其餘民用或軍民合用機場/ THE OTHER CIVIL OR "JOINT CIVIL AND MILITARY" AIRPORTS	GEN 4.1 - 1
4.1.3 費用之繳付/ METHODS OF PAYMENT	GEN 4.1 - 1
GEN 4.2 助航設備服務費/ Air navigation services charges	GEN 4.2 - 1

THIS PAGE
INTENTIONALLY
LEFT BLANK

COV	覆蓋 Cover or covered or covering
CPDLC	管制員-駕駛員資料鏈路通信 Controller-pilot data link communications
CPL	現行飛航計畫(電報型式代字) Current flight plan (message type designator)
CRC	週期性重複檢查 Cyclic redundancy check
CRM	碰撞風險模式 Collision risk model
CRP	強制報告點 Compulsory reporting point
CRZ	巡航 Cruise
CS	呼號 Call sign
CS	卷層雲 Cirrostratus
CTA	管制區域 Control area
CTAM	爬升至並保持 Climb to and maintain
CTC	接觸·聯繫 Contact
CTL	管制 Control
CTN	注意 Caution
CTR	管制地帶 Control zone
CU	積雲 Cumulus
CUF	積雲狀 Cumuliform
CUST	海關 Customs
CVR	駕駛艙通話記錄器 Cockpit voice recorder
CW	連續波 Continuous wave
CW*	順時針方向 Clockwise
CWY	清除區 Clearway

D - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
D	下降 (RVR值在過去10分鐘的趨勢) Downward (tendency in RVR during previous 10 minutes)
D...	危險區 (後接識別名稱) Danger area (followed by identification)
DA	決定高度 Decision altitude
D-ATIS	資料鏈路終端資料自動廣播服務 Data link automatic terminal information service

DCD	雙波道雙工 Double channel duplex
DCKG	停靠 Docking
DCP	基準面交叉點 Datum crossing point
DCPC	管制員-駕駛員直接通信 Direct controller-pilot communications
DCS	雙波道單工 Double channel simplex
DCT	直飛 Direct (in relation to flight plan clearances and type of approach)
DE	從 (用於呼叫站的呼號前) (用於航空固定通信服務作為程序信號) From (used to precede the call sign of the calling station) (to be used in AFS as a procedure signal)
DEC	十二月 December
DEG	度 Degrees
DEP	離場 Depart or departure
DEP	離場 (電報型式代字) Departure (message type designator)
DEPO	沈積物 Deposition
DER	離場跑道末端 Departure end of the runway
DES	下降至 Descend to or descending to
DEST	目的地 Destination
DETRESFA	遇險階段 Distress phase
DEV	偏離 Deviation or deviating
DF*	定向至航點 (用於導航資料庫編碼) Direct to a fix
DF	定向 Direction finding
DFDR	數位飛行資料記錄器 Digital flight data recorder
DFTI	著陸距離指示器 Distance from touchdown indicator
DH	決定實際高度 Decision height
DIF	擴散 Diffuse
DIST	距離 Distance
DIV	轉降 Divert or diverting
DLA	延遲 (電報型式代字) Delay (message type designator)
DLA	延遲 Delay or delayed
DLIC	資料鏈路初始能力 Data link initiation capability

DLY	每天 Daily
DME	測距儀 Distance measuring equipment
DNG	危險或危險的 Danger or dangerous
DOF	飛航日期 Date of flight
DOM	國內的 Domestic
DP	露點溫度 Dew point temperature
DPT	深度 Depth
DR	推測航行 Dead reckoning
DR...	低吹 (後接塵,沙,雪) Low drifting (followed by DU=dust, SA=sand or SN=snow)
DRG	當 During
DS	塵暴 Dust storm
DSB	雙旁波帶 Double sideband
DTAM	下降至並保持 Descend to and maintain
DTG	日期時間組 Date-time group
DTHR	位移跑道頭 Displaced runway threshold
DTRT	劣化、降低 Deteriorate or deteriorating
DTW	前後雙輪 Dual tandem wheels
DU	塵 Dust
DUC	濃密上層雲 Dense upper cloud
DUPE	這是重複電報 (用於航空固定通信服務作為程序信號) This is a duplicate message (to be used in AFS as a procedure signal)
DUR	期間 Duration
D-VOLMET	資料鏈路航空氣象資料 Data link VOLMET
DVOR	都卜勒特高頻多向導航臺 Doppler VOR
DW	雙輪 Dual wheels
DZ	毛毛雨 Drizzle

E - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
E	東方或東經 East or eastern longitude

EAT	預計進場時間 Expected approach time
EB	東向 Eastbound
EDA	高度差別區 Elevation differential area
EDTO	延展轉降時限作業 Extended diversion time operations
EEE	錯誤 (用於航空固定通信服務作為程序信號) Error (to be used in AFS as a procedure signal)
EET	預計航程時間 Estimated elapsed time
EFC	預期進一步許可 Expect further clearance
EFIS	電子飛航儀表系統 Electronic flight instrument system
eFPL	填報之飛航計畫 (透過協作環境下飛航與流量資訊服務交換之電子式飛航計畫) Filed flight plan exchanged via Flight and Flow — Information for a Collaborative Environment (FF-ICE) services
EGNOS	歐盟星基增強系統 European geostationary navigation overlay service
EHF	至高頻 (30000 to 300000 MHz) Extremely high frequency (30000 to 300000 MHz)
ELBA	航空器上緊急定位信標 Emergency location beacon-aircraft
ELEV	標高 Elevation
ELR	特長程 Extra long range
ELT	緊急定位發報機 Emergency locator transmitter
EM	發射 Emission
EMBD	隱藏在雲中 (指其他雲層中隱藏積雨雲) Embedded in a layer (to indicate cumulonimbus embedded in layers of other clouds)
EMERG	緊急 Emergency
END	停止端 (用於跑道視程時) Stop-end (related to RVR)
ENE	東北東 East-north-east
ENG	引擎 Engine
ENR	航路 En-route
ENRC...	航路圖 En-route chart (followed by name/title)
EOBT	預計取開輪檔時間 Estimated off-block time
EQN	北半球赤道地區 Equatorial latitudes northern hemisphere
EQPT	裝備 Equipment
EQS	南半球赤道地區 Equatorial latitudes southern hemisphere

ESE	東南東 East-south-east
EST	預計 (電報型式代字) Estimate or estimated or estimation (message type designator)
ETA	預計到場時間或預計到場 Estimated time of arrival or estimating arrival
ETD	預計離場時間或預計離場 Estimated time of departure or estimating departure
ETO	預計通過重要點時間 Estimated time over significant point
EUR RODEX	歐洲區域作業用氣象資料交換 European regional OPMET data exchange
EV	每 Every
EVS	增強目視系統 Enhanced vision system
EXC	除外 Except
EXER	演習 Exercises or exercising or to exercise
EXP	預期 Expect or expected or expecting
EXTD	伸展或擴大 Extend or extending or extended

F - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
F	固定的 Fixed
FA	自航點沿航道至指定高度 (用於導航資料庫編碼) Course from a fix to an altitude
FAC	設施 Facilities
FAF	最後進場定位點 Final approach fix
FAL	國際空運便利 Facilitation of international air transport
FAP	最後進場點 Final approach point
FAS	最後進場階段 Final approach segment
FATO	最後進離場區 Final approach and take-off area
FAX	傳真發送 Facsimile transmission
FBL	輕度 (用於積冰、大氣亂流、靜電干擾等之程度) Light (used to indicate the intensity of weather phenomena, interference or static reports, e.g. FBL RA=light rain)
FC	漏斗雲 (龍捲或水龍捲) Funnel cloud (tornado or water spout)
FCST	預報 Forecast
FCT	摩擦係數 Friction coefficient
FDPS	飛航資料處理系統 Flight data processing system

FEB	二月 February
FEW	少 Few
FF-ICE*	協作環境下飛航與流量資訊 Flight and Flow — Information for a Collaborative Environment
FG	霧 Fog
FIC	飛航情報中心 Flight information center
FIR	飛航情報區 Flight information region
FIS*	飛航諮詢臺 Flight information station
FIS	飛航情報服務 Flight information service
FISA	自動化飛航情報服務 Automated flight information service
FL	飛航空層 Flight level
FLD	區域,範圍 Field
FLG	閃光 Flashing
FLO*	照明燈 Flood light
FLR	火焰 Flares
FLT	飛航 Flight
FLTCK	飛航測試 Flight check
FLUC	波動 Fluctuating or fluctuation or fluctuated
FLW	跟隨；後接 Follow(s) or following
FLY	飛行 Fly or flying
FM	自航點沿航道至人工終止(引導) (用於導航資料庫編碼) Course from a fix to manual termination
FM	從 From
FM...	從 (後接預報天氣變化開始時間) From (followed by time weather change is forecast to begin)
FMC	飛航處理電腦 Flight management computer
FMS	飛航管理系統 Flight management system
FMU	流量管理單位 Flow management unit
FNA	最後進場 Final approach
FOD*	外物損害 Foreign object damage
FPAP	航道對正點 Flight path alignment point

FPL	填報之飛航計畫 (透過航空固定通信服務交換之飛航計畫) Filed flight plan exchanged via aeronautical fixed service (AFS)
FPM	呎/分 Feet per minute
FPR	飛航計畫航線 Flight plan route
FR	剩餘油量 Fuel remaining
FREQ	頻率或班期 Frequency
FRI	星期五 Friday
FRNG	火炮射擊 Firing
FRONT	鋒面 (天氣) Front (relating to weather)
FROST	霜(用於機場警報) Frost (used in aerodrome warnings)
FRQ	經常 Frequent
FSL	全停落地 Full stop landing
FSS	飛航諮詢臺 Flight service station
FST	第一 First
FT	呎 (度量衡單位) Feet (dimensional unit)
FTE	飛航技術誤差 Flight technical error
FTP	假想跑道頭 Fictitious threshold point
FTT	飛航技術容許偏差 Flight technical tolerance
FU	煙 Smoke
FZ	冰凍 Freezing
FZDZ	凍毛雨 Freezing drizzle
FZFG	凍霧 Freezing fog
FZRA	凍雨 Freezing rain

G - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

G	綠色 Green
G...	平均風速變化 (陣風) (後接數字，用於METAR/SPECI及TAF報) Variations from the mean wind speed (gusts) (followed by figures in METAR/SPECI and TAF)
GA	普通航空 General aviation
GA	請講，請恢復發報 (用於航空固定通信服務作為程序信號) Go ahead, resume sending (to be used in AFS as a procedure signal)

G/A	地對空 Ground-to-air
G/A/G	地對空及空對地 Ground-to-air and air-to-ground
GAGAN	印度星基增強系統 GPS and geostationary earth orbit augmented navigation
GAIN	增加空速或頂風 Airspeed or headwind gain
GAMET	低空飛行之區域天氣預報 Area forecast for low-level flights
GARP	GBAS方位參考點 GBAS azimuth reference point
GBAS	陸基增強系統 Ground - based augmentation system
GCA	地面管制進場設備或地面管制進場 Ground controlled approach system or ground controlled approach
GEN	通則 General
GEO	地理的或真向的 Geographic or true
GES	地面基地臺 Ground earth station
GLD	滑翔機 Glider
GLONASS	全球導航衛星系統 Global navigation satellite system
GLS	陸基增強系統之降落系統 GBAS landing system
GMC...	機場地面活動圖 Ground movement chart (followed by name/title)
GND	地面 Ground
GNDCK	地面查核 Ground check
GNSS	全球導航衛星系統 Global navigation satellite system
GOV	政府 Government
GP	下滑道或滑降臺 Glide path
GPA	滑降角 Glide path angle
GPIP	下滑道攔截點 Glide path intercept point
GPS	全球定位系統 Global positioning system
GPU	地面動力單元 Ground power unit
GPWS	接近地面警告系統 Ground proximity warning system
GR	雹 Hail
GRAS	陸基區域增強系統 Ground-based regional augmentation system
GRASS	草地降落區 Grass landing area

GRIB	柵點值形式之處理氣象資料 (航空氣象電碼) Processed meteorological data in the form of grid point values expressed in binary form (meteorological code)
GRVL	碎石 Gravel
GS	地速 Ground speed
GS	小冰雹 Small hail and/or snow pellets
GUF1*	全球唯一飛航識別碼 Globally Unique Flight Identifier
GUND	大地基準面起伏 Geoid undulation

H - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
H	高氣壓區或高氣壓中心 High pressure area or the centre of high pressure
H...	顯著浪高(後接數字，用於METAR/SPECI報) Significant wave height (followed by figures in METAR/SPECI)
H24	日夜24小時服務 Continuous day and night service
HA	等待航線/橢圓航線至指定高度 (用於導航資料庫編碼) Holding/racetrack to an altitude
HAPI	直昇機進場滑降指示燈 Helicopter approach path indicator
HBN	危險標燈 Hazard beacon
HCH	通過直昇機機場實際高度 Helipoint crossing height
HDF	高頻定向臺 High frequency direction-finding station
HDG	航向 Heading
HEL	直昇機 Helicopter
HF	等待航線/橢圓航線至航點 (用於導航資料庫編碼) Holding/racetrack to a fix
HF	高頻 (3000 to 30000 kHz) High frequency (3000 to 30000 kHz)
HGT	實際高度 Height or height above
HJ	日出至日沒 Sunrise to sunset
HLDG	等待 Holding
HLP	直昇機機場 Helipoint
HLS	直昇機降落點 Helicopter landing site
HM	等待航線/橢圓航線至人工終止(引導) (用於導航資料庫編碼) Holding/racetrack to a manual termination
HN	日沒至日出 Sunset to sunrise
HNH	北半球高緯度地區 High latitudes northern hemisphere

HO	應航行需要服務 Service available to meet operational requirements
HOL	假日 Holiday
HOSP	醫療服務航空器 Hospital aircraft
HPA	百帕 Hectopascal
HR	小時 Hours
HRP	直昇機機場參考點 Helipoint reference point
HS	應定期航行時間服務 Service available during hours of scheduled operations
HSR	南半球高緯度地區 High latitudes southern hemisphere
HUD	平視顯示儀 Head-up display
HUM	人道主義 Humanitarian
HURCN	颶風 Hurricane
HVDF	高頻及特高頻定向臺 (同址) High and very high frequency direction-finding stations (at the same location)
HVY	重 Heavy
HVY	重度 (用於指明天氣現象的強度) Heavy (used to indicate the intensity of weather phenomena, e.g. HVY RA = heavy rain)
HX	無特定工作時間 No specific working hours
HYR	較高 Higher
HZ	塵霾 Haze
HZ	赫 (週數/每秒) Hertz (cycle per second)

I - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
IAC...	儀器進場圖 Instrument approach chart (followed by name/title)
IAF	最初進場定位點 Initial approach fix
IAO	進出雲層 In and out of clouds
IAP	儀器進場程序 Instrument approach procedure
IAR	航線交叉點 Intersection of air routes
IAS	指示空速 Indicated airspeed
IBN	識別標燈 Identification beacon
ICAO	國際民航組織 International Civil Aviation Organization

ICE	積冰 Icing
ID	識別或辨認 Identifier or identify
IDENT	識別 Identification
IF*	起始點 (用於導航資料庫編碼) Initial fix
IF	中間進場定位點 Intermediate approach fix
IFF	敵我識別 Identification friend/foe
IFR	儀器飛航規則 Instrument flight rules
IGA	國際普通航空 International general aviation
ILS	儀器降落系統 Instrument landing system
IM	內信標臺 Inner marker
IMC	儀器天氣情況 Instrument meteorological conditions
IMG	移民 Immigration
IMI	詢問符號 (用於航空固定通信服務作為程序信號) Interrogation sign (question mark) (to be used in AFS as a procedure signal)
IMPR	改進 Improve or improving
IMT	立即 Immediate or immediately
INA	最初進場 Initial approach
INBD	入境 Inbound
INC	雲中 In cloud
INCERFA	情況不明階段 Uncertainty phase
INCORP	編入 Incorporated
INFO	資料情報 Information
INOP	失效 Inoperative
INP	如不可能 If not possible
INPR	進行中 In progress
INS	慣性導航系統 Inertial navigation system
INSTL	安裝或設施 Install or installed or installation
INSTR	儀器 Instrument
INT	交叉處 Intersection

INTL	國際 International
INTRG	詢問器 Interrogator
INTRP	阻擾或間斷 Interrupt or interruption or interrupted
INTSF	加強 Intensify or intensifying
INTST	強度 Intensity
IR	跑道積冰 Ice on runway
IRS	慣性參考系統 Inertial reference system
ISA	國際標準大氣 International standard atmosphere
ISB	獨立旁波帶 Independent sideband
ISOL	孤立 Isolated

J - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
JAN	一月 January
JCC*	飛航管制聯合協調中心 Joint coordination center (air traffic control joint coordination center)
JTST	噴射氣流 Jet stream
JUL	七月 July
JUN	六月 June

K - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
KG	公斤 Kilograms
KHZ	千赫 Kilohertz
IAS	節(指示空速) Knots indicated airspeed
KM	公里 Kilometers
KMH	每小時公里 Kilometers per hour
KPA	千帕 Kilopascal
KT	節 Knots
KW	千瓦 Kilowatts

L - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
...L	Left (preceded by runway designation number to identify a parallel runway) 左 (置於跑道名稱後以識別平行跑道)

L	公升 Liter
L	定位臺 (見中定位臺,外定位臺) Locator (see LM, LO)
L	低氣壓區或低氣壓中心 Low pressure area or the centre of low pressure
LAM	邏輯確認(電報型式代字) Logical acknowledgement (message type designator)
LAN	內陸 Inland
LAT	緯度或緯線 Latitude
LCA	本地或位置 Local or locally or location or located
LDA	可用之降落距離 Landing distance available
LDA*	左右定位輔助臺 Localizer type directional aid
LDAH	直昇機可用降落距離 Landing distance available, helicopter
LDG	降落 Landing
LDI	降落方向指示器 Landing direction indicator
LEN	長度 Length
LF	低頻(30 to 300 kHz) Low frequency (30 to 300 kHz)
LGT	燈光 Light or lighting
LGTD	置有燈光 Lighted
LIH	高亮度 Light intensity high
LIL	低亮度 Light intensity low
LIM	中亮度 Light intensity medium
LINE	線性 (用於SIGMET報) Line (used in SIGMET)
LM	中定位臺 Locator, middle
LMT	本地時間 Local mean time
LNAV	左右導航 Lateral navigation
LNG	長 (用於進場種類需要或請求) Long (used to indicate the type of approach desired or required)
LO	外定位臺 Locator, outer
LOC	左右定位臺 Localizer
LONG	經度或經線 Longitude
LORAN	長程導航系統 LORAN (long range air navigation system)

LOSS	喪失空速或頂風 Airspeed or headwind loss
LPV	左右定位臺性能垂直導引 Localizer performance with vertical guidance
LR	最後接收電報為... (用於航空固定通信服務作為程序信號) Last message received by me was...(to be used in AFS as a procedure signal)
LRG	長程 Long range
LS	最後發送電報為... (用於航空固定通信服務作為程序信號) The last message sent by me was... or Last message was...(to be used in AFS as a procedure signal)
LTA	低高度管制區域 Lower control area
LTD	限制 Limited
LTP	落地跑道頭 Landing threshold point
LV	輕度及風向不定 Light and variable (relating to wind)
LVE	離開 Leave or leaving
LVL	空層 Level
LVP	低能見度作業程序 Low visibility procedures
LYR	層 Layer or layered

M - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
...M	公尺 (置於數字之後) Meters (preceded by figures)
M...	馬赫 (置於數字之前) Mach number (followed by figures)
M...	跑道視程最小值 (後接數字·用於METAR/SPECI報) Minimum value of runway visual range (followed by figures in METAR/SPECI)
MAA	最高許可高度 Maximum authorized altitude
MAG	磁的 Magnetic
MAHF	誤失進場等待航點 Missed approach holding fix
MAINT	維護 Maintenance
MALS*	中亮度進場燈系統 Medium-intensity approach lighting system
MALSF*	加設順序閃光燈之中亮度進場燈系統 Medium-intensity approach lighting system with sequenced flashers
MALSR*	加設跑道對正指示燈之中亮度進場燈系統 Medium-intensity approach lighting system with runway alignment indicator lights
MAP	航用圖表 Aeronautical maps and charts
MAPT	誤失進場點 Missed approach point
MAR	三月 March

MAR	海洋上 At sea
MATF	誤失進場轉彎航點 Missed approach turning fix
MATZ	軍用機場交通地帶 Military aerodrome traffic zone
MAX	最大 Maximum
MAY	五月 May
MBST	微爆流 Microburst
MCA	最低通過高度 Minimum crossing altitude
MCTR	軍用管制地帶 Military control zone
MCW	調幅波 Modulated continuous wave
MDA	最低下降高度 Minimum descent altitude
MDF	中頻定向臺 Medium frequency direction-finding station
MDH	最低下降實際高度 Minimum descent height
MEA	最低航路高度 Minimum en-route altitude
MEDEVAC	醫療運送飛航 Medical evacuation flight
MEHT	航空器通過跑道頭時駕駛員之最低眼高 (用於目視進場滑降指示燈) Minimum eye height over threshold (for visual approach slope indicator systems)
MET	氣象 Meteorological or meteorology
METAR	機場例行天氣報告 (氣象電碼) Aerodrome routine meteorological report (in meteorological code)
MET REPORT	當地例行觀測報告 (簡縮明語) Local routine meteorological report (in abbreviated plain language)
MF	中頻 (300 to 3000 kHz) Medium frequency (300 to 3000 kHz)
MHA	最低等待高度 Minimum holding altitude
MHDF	中頻及高頻定向臺 (同址) Medium and high frequency direction-finding stations (at the same location)
MHVDF	中頻,高頻及特高頻定向臺 (同址) Medium, high and very high frequency direction-finding stations (at the same location)
MHZ	兆赫 Megahertz
MID	中間點 (用於跑道視程時) Mid-point (related to RVR)
MIFG	淺霧 Shallow fog
MIL	軍事的 Military
MIN	分鐘 Minutes
MIS	失去連絡...(發射臺識別)(用於航空固定通信服務作為程序信號) Missing...(transmission identification) (to be used in AFS as a procedure signal)

MKR	無線電信標 Marker radio beacon
MLS	微波降落系統 Microwave landing system
MM	中信標臺 Middle marker
MNH	北半球中緯度地區 Middle latitudes northern hemisphere
MNM	最小 Minimum
MNPS	最低航行性能規格 Minimum navigation performance specifications
MNT	監聽或監視 Monitor or monitoring or monitored
MNTN	保持 Maintain
MOA	軍事作業區 Military operating area
MOC	與障礙物間最低隔離高度 Minimum obstacle clearance (required)
MOCA	最低障礙物間隔高度 Minimum obstacle clearance altitude
MOD	中度 (用於指示天氣現象、靜電干擾報告等程度) Moderate (used to indicate the intensity of weather phenomena, interference or static report, e.g. MOD RA=moderate rain)
MON	在山之上 Above mountains
MON	星期一 Monday
MOPS	最低作業性能標準 Minimum operational performance standards
MOV	移動 Move or moving or movement
MPS	公尺/秒 Meters per second
MRA	最低收訊高度 Minimum reception altitude
MRG	中距離 Medium range
MRP	飛行天氣報告點 ATS/MET reporting point
MS	負數或減去 Minus
MSA	最低區域高度 Minimum sector altitude
MSAS	MTSAT星基增強系統 Multi-functional transport satellite (MTSAT) satellite-based augmentation system
MSAW	最低安全高度警告 Minimum safe altitude warning
MSG	電報・音訊 Message
MSH	南半球中緯度地區 Middle latitudes southern hemisphere
MSL	平均海平面 Mean sea level

MSR	誤傳電報 (用於航空固定通信服務作為程序信號) Message... (transmission identification) has been misrouted (to be used in AFS as a procedure signal)
MSSR	單脈波次級搜索雷達 Monopulse secondary surveillance radar
MT	山 Mountain
MTOM	最大起飛重量 Maximum take-off mass
MTU	公尺制 Metric units
MTW	山岳波 Mountain waves
MVDF	中頻及特高頻定向臺 (同址) Medium and very high frequency direction-finding stations (at the same location)
MWO	氣象守視臺 Meteorological watch office
MX	混合狀積冰 (白色與透明積冰混合) Mixed type of ice formation (white and clear)

N - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
N	無明顯傾向 (RVR值在過去10分鐘的趨勢) No distinct tendency (in RVR during previous 10 minutes)
N	北或北緯 North or northern latitude
NADP	降低噪音離場程序 Noise abatement departure procedure
NASC	全國航空情報服務系統中心 National AIS system centre
NAT	北大西洋 North Atlantic
NAV	航行 Navigation
NAVAID	助航設施 Navigation aid
NB	北向 Northbound
NBFR	不得早於 Not before
NC	不變 No change
NCD	未偵測到雲 (使用於自動編發之METAR/SPECI報) No cloud detected (use in automated METAR/SPECI)
NDB	歸航臺 Non-directional radio beacon
NDV	無方向性能見度 (使用於自動編發之METAR/SPECI報) No directional variations available (use in automated METAR/SPECI)
NE	東北 North-east
NEB	東北向 North-eastbound
NEG	不、否定、未獲允許、不正確 No or negative or permission not granted or that is not correct
NGT	夜間 Night

NIL	無 None or I have nothing to send to you
NM	哩 Nautical miles
NML	正常 Normal
NN	未命名的 No name, unnamed
NNE	北北東 North-north-east
NNW	北北西 North-north-west
NO	否定 (用於航空固定通信服務作為程序信號) No (negative) (to be used in AFS as a procedure signal)
NOF	國際飛航公告室 International NOTAM Office
NONSTD	非標準 Non-standard
NOSIG	無重大變化 (用於趨勢降落預報) No significant change (used in trend-type landing forecasts)
NOTAM	飛航公告 A notice distributed by means of telecommunication containing information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential to personnel concerned with flight operations
NOTAMC	取消飛航公告 Cancelling NOTAM
NOTAMN	新的飛航公告 New NOTAM
NOTAMR	取代飛航公告 Replacing NOTAM
NOV	十一月 November
NOZ	正常作業區 Normal operating zone
NPA	非精確進場 Non-precision approach
NR	數字、號碼 Number
NRH	未聽到回答 No reply heard
NS	兩層雲 Nimbostratus
NSC	無顯著雲 Nil significant cloud
NSE	導航系統誤差 Navigation system error
NSW	無顯著(危害)天氣 Nil significant weather
NTL	國家的 National
NTZ	禁止穿越區 No transgression zone
NW	西北 North-west
NWB	西北向 North-westbound

NXT	最近的、下一個 Next
-----	-----------------

O - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
OAC	海洋區域管制中心 Oceanic area control centre
OAS	障礙物評估表面 Obstacle assessment surface
OBS	觀測 Observe or observed or observation
OBSC	不清晰 Obscure or obscured or obscuring
OBST	障礙物 Obstacle
OCA	海洋管制區域 Oceanic control area
OCA	障礙物間隔高度 Obstacle clearance altitude
OCC	掩蔽(燈光) Occulting (light)
OCH	障礙物間隔實際高度 Obstacle clearance height
OCNL	間歇性、間歇的 Occasional or occasionally
OCS	障礙物間隔面 Obstacle clearance surface
OCT	十月 October
OFZ	障礙物淨空區 Obstacle free zone
OGN	起始 (用於航空固定通信服務作為程序信號) Originate (to be used in AFS as a procedure signal)
OHD	正上方 Overhead
OIS	障礙物識別面 Obstacle identification surface
OK	同意,正確 (用於航空固定通信服務作為程序信號) We agree or It is correct (to be used in AFS as a procedure signal)
OLDI	線上資料交換 On-line data interchange
OM	外信標臺 Outer marker
OPA	白色而不透明的積冰 Opaque, white type of ice formation
OPC	航務管制 Control indicated is operational control
OPMET	作業用氣象(資料) Operational meteorological (information)
OPN	開啟 Open or opening or opened
OPR	使用人或經營者或運用 Operator or operate or operative or operating or operational
OPS	作業、操作 Operations

O/R	請求 On request
ORD	順序 Order
OSV	海洋船站 Ocean station vessel
OTP	頂上 On top
OTS	組合航跡系統 Organized track system
OUBD	出境 Outbound
OVC	密雲 Overcast

P - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
P...	最大風速或跑道視程 (後接數字 · 用於METAR/SPECI報) Maximum value of wind speed or runway visual range (followed by figures in METAR/SPECI and TAF)
P...	禁航區(後接識別名稱) Prohibited area (followed by identification)
PA	精確進場 Precision approach
PAC*	太平洋地區 (國際民航組織) Pacific Region (ICAO)
PALS	精確進場燈光系統 (指明型式) Precision approach lighting system (specify category)
PANS	飛航服務程序 Procedures for air navigation services
PAPI	精確進場滑降指示燈 Precision approach path Indicator
PAR	精確進場雷達 Precision approach radar
PARL	平行 Parallel
PATC...	精確進場地形圖 Precision approach terrain chart (followed by name/title)
PAX	旅客 Passenger(s)
PBC	性能通信 Performance-based communication
PBN	性能導航 Performance-based navigation
PBS	性能監視 Performance-based surveillance
PCD	進行 Proceed or proceeding
PCL	駕駛員控制的燈光 Pilot-controlled lighting
PCN	鋪面等級序號 Pavement classification number
PCT	百分比 Per cent
PDC	起飛前許可 Pre-departure clearance

PDG	程序設計梯度 Procedure design gradient
PER	性能 Performance
PERM	永久的 Permanent
PFP	初步飛航計畫 Preliminary Flight Plan
PIB	飛航前簡報 Pre-flight information bulletin
PJE	跳傘演習 Parachute jumping exercise
PL	冰珠 Ice pellets
PLA	練習低空進場 Practice low approach
PLVL	現在空層 Present level
PN	需事先通知 Prior notice required
PNR	無法返航之點 Point of no return
PO	塵/沙旋風 Dust/sand whirls (dust devils)
POB	所載人員總數 Persons on board
POSS	可能 Possible
PPI	計畫位置指示器 Plan position indicator
PPR	需事先許可 Prior permission required
PPSN	現在位置 Present position
PRFG	機場部分被霧遮蔽 Aerodrome partially covered by fog
PRI	初級 Primary
PRKG	停車(機) Parking
PROB	可能性 Probability
PROC	程序 Procedure
PROP	螺旋槳 Propeller
PROV	臨時的 Provisional
PRP	任意點進場程序參考點 Point-in-space reference point
PS	正數或加 Plus
PSG	通過 Passing
PSN	位置 Position

PSP	穿孔鋼板 Pierced steel plank
PSR	初級搜索雷達 Primary surveillance radar
PSYS	氣壓系統 Pressure system(s)
PTN	程序轉彎 Procedure turn
PTS	極區航跡結構 Polar track structure
PWR	電力 Power

Q - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
QDL	你要問我一組方位嗎? (用於無線電報中之Q碼) Do you intend to ask me for a series of bearings? or I intend to ask you for a series of bearings (to be used in radiotelegraphy as a Q Code)
QDM	磁航向(無風) Magnetic heading (zero wind)
QDR	磁方位 Magnetic bearing
QFE	機場標高之大氣壓力(或跑道頭之大氣壓力) Atmospheric pressure at aerodrome elevation (or at runway threshold)
QFU	跑道之磁場方位 Magnetic orientation of runway
QGE	我距離你的電臺多遠? (用於無線電報中之Q碼) What is my distance to your station? or Your distance to my station is (distance figures and units) (to be used in radiotelegraphy as a Q Code)
QJH	我應轉我的測試帶嗎?(用於航空固定通信服務中之Q碼) Shall I run my test tape/a test sentence? or Run your test tape/a test sentence (to be used in AFS as a Q Code)
QNH	在地面上獲得標高指示之高度表撥定值 Altimeter sub-scale setting to obtain elevation when on the ground
QSP	你能免費傳訊給...嗎? (用於航空固定通信服務中之Q碼) Will you relay to...free of charge? or I will relay to...free of charge (to be used in AFS as a Q Code)
QTA	我應取消...號電報嗎? 或取消...號電報 (用於航空固定通信服務中之Q碼) Shall I cancel telegram number...? or Cancel telegram number...(to be used in AFS as a Q Code)
QTE	真方位 True bearing
QTF	你能告訴我根據你控制的定向臺的方位，所得到我的電臺的位置嗎? (用於無線電報中之Q碼) Will you give me the position of my station according to the bearings taken by the D/F stations which you control? or The position of your station according to the bearings taken by the D/F stations that I control was...latitude...longitude (or other indication of position), class...at...hours (to be used in radiotelegraphy as a Q Code)
QUAD	象限 Quadrant
QUJ	你能指明到你電臺的真航跡嗎? (用於無線電報中之Q碼) Will you indicate the TRUE track to reach you? or The TRUE track to reach me is...degrees at...hours(to be used in radiotelegraphy as a Q Code)

R - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
...R	右(前接跑道號碼以分辨平行跑道) Right (preceded by runway designation number to identify a parallel runway)
R	轉彎率 Rate of turn

R	紅色 Red
R...	輻向 (後接3碼數字) Radial from VOR (followed by three figures)
R...	限航區 (後接識別名稱) Restricted area (followed by identification)
R...	跑道(後接數字，用於METAR/SPECI報) Runway (followed by figures in METAR/SPECI)
R	收到 (用於航空固定通信服務中作為程式信號) Received (acknowledgement of receipt) (to be used in AFS as a procedure signal)
RA	雨 Rain
RA	避撞諮詢 Resolution advisory
RA*	無線電高度表 Radio altimeter
RAC	飛航規則及飛航服務 Rules of the air and air traffic services
RAG	破損的或粗糙的 Ragged
RAG	跑道攔截索 Runway arresting gear
RAI	跑道對正指示燈 Runway alignment indicator
RAIM	接收器自主完整度監視 Receiver autonomous integrity monitoring
RASC	區域航空情報服務系統中心 Regional AIS system center
RASS	遠端高度表設定來源 Remote altimeter setting source
RB*	覆誦 Read back
RB	救護船 Rescue boat
RCA	到達巡航高度 Reach cruising altitude
RCC	搜救協調中心 Rescue coordination centre
RCF	無線電通信失效(電報型式代字) Radiocommunication failure (message type designator)
RCH	到達 Reach or reaching
RCL	跑道中心線 Runway centre line
RCLL	跑道中心線燈 Runway centre line light(s)
RCLR	再許可 Re-cleared
RCP	通信性能需求 Required communication performance
RDH	參考基準實際高度 Reference datum height
RDL	輻向 Radial
RDO	無線電 Radio

RDOACT	放射性 Radioactive
RE	先前的(如雨等天氣現象) Recent (used to qualify weather phenomena , e.g. RERA = recent rain)
REC	接收或接收機 Receive or Receiver
REDL	跑道邊燈 Runway edge light(s)
REF	參考 Reference to...or refer to...
REG	註冊 Registration
RENL	跑道末端燈 Runway end light(s)
REP	報告或報告點 Report or reporting or reporting point
REQ	請求 Request or requested
RERTE	重定航線 Re-route
RESA	跑道端安全區 Runway end safety area
RF	固定半徑之圓弧至航點 (用於導航資料庫編碼) Constant radius arc to a fix
RFFS	救援與消防服務 Rescue and fire fighting services
RG	視程 (燈光) Range (lights)
RHC	右航線 Right-hand circuit
RIF	飛航中重獲航管許可 Re-clearance in flight
RIME	霧淞(用於機場警報) Rime (used in aerodrome warnings)
RL	報告離開 Report leaving
RLA	轉達 Relay to
RLCE	要求途中改變空層 Request level change en-route
RLLS	跑道導引燈系統 Runway lead-in lighting system
RLNA	要求空層無法提供 Request level not available
RMK	備註 Remark
RNAV	區域航行 Area navigation (to be pronounced as "AR-NAV")
RNG	距離 (無線電測得) Radio range
RNP	導航性能需求 Required navigation performance
ROBEX	區域氣象公告交換 (計劃) Regional OPMET bulletin exchange (scheme)
ROC	爬升率 Rate of climb

ROCAF*	中華民國空軍 Republic of China Air Force
ROD	下降率 Rate of descent
RON	僅可收報 Receiving only
RPDS	參考路徑資料選擇碼 Reference path data selector
RPI	雷達位置指示器 Radar position indicator
RPL	長期飛航計畫 Repetitive flight plan
RPLC	取代或被取代 Replace or replaced
RPS	雷達位置符號 Radar position symbol
RPT	重覆或重發 (用於航空固定通信服務作為程序信號) Repeat or I repeat (to be used in AFS as a procedure signal)
RQ	要求 (用於航空固定通信服務作為程序信號) Request (to be used in AFS as a procedure signal)
RQMNTS	需求 Requirements
RQP	要求飛航計畫(電報型式代字) Request flight plan (message type designator)
RQS	要求飛航計畫補充資料(電報型式代字) Request supplementary flight plan (message type designator)
RR	報告到達 Report reaching
RRA	(或RRB、RRC...等；按順序)氣象延遲報 (電報型式代字) (or RRB, RRC...etc., in sequence) Delayed meteorological message (message type designator)
RSC	搜救附屬中心 Rescue sub-centre
RSCD	跑道道面情況 Runway surface condition
RSP	雷達信標 Responder beacon
RSP	監視性能需求 Required surveillance performance
RSR	航路搜索雷達 En-route surveillance radar
RSS	和的平方根 Root sum square
RTD	延遲的 (用於氣象延遲報；電報型式代字) Delayed (used to indicate delayed meteorological message; message type designator)
RTE	航線 Route
RTF	無線電話 Radiotelephone
RTG	無線電報 Radiotelegraph
RTHL	跑道頭燈 Runway threshold light(s)
RTIL*	跑道頭識別燈 Runway threshold identification lights
RTN	回航 Return or returned or returning

RTODAH	直昇機放棄起飛可用距離 Rejected take-off distance available, helicopter
RTS	復工 Return to service
RTT	無線電傳印字機 Radioteletypewriter
RTZL	跑道著陸區燈 Runway touchdown zone light(s)
RUT	地區航路標準發射頻率 Standard regional route transmitting frequencies
RV	救護船 Rescue vessel
RVA	雷達引導區域 Radar vectoring area
RVR	跑道視程 Runway visual range
RVSM	縮減垂直隔離 (介於飛航空層290及飛航空層410間) Reduced vertical separation minimum (300M (1000FT) between FL290 and FL410)
RWY	跑道 Runway

S - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
S	南或南緯 South or southern latitude
S...	海的狀態(後接數字，用於METAR/SPECI報) State of the sea (followed by figures in METAR/SPECI)
SA	沙 Sand
SALS	簡式進場燈光系統 Simple approach lighting system
SAN	檢疫或衛生 Sanitary
SAR	搜尋與救援 Search and rescue
SARPS	國際民航組織之標準及建議措施 Standards and Recommended Practices(ICAO)
SAT	星期六 Saturday
SATCOM	衛星通信 (用於同時參考語音及資料衛星通信或僅參考資料衛星通信) Satellite communication (used only when referring generally to both voice and data satellite communication or only data satellite communication)
SATVOICE	衛星語音通信 Satellite voice communication
SB	南向 Southbound
SBAS	星基增強系統 Satellite-based augmentation system
SC	層積雲 Stratocumulus
SCT	疏雲 Scattered
SD	標準差 Standard deviation
SDBY	稍候 Stand by

SDF	階梯下降定位點 Step down fix
SE	東南 South-east
SEA	海 (與海面溫度及海的狀態一起使用) Sea (used in connection with sea-surface temperature and state of the sea)
SEB	東南向 South-eastbound
SEC	秒 Seconds
SECN	段 Section
SECT	區 Sector
SELCAL	選號呼叫系統 Selective calling system
SEP	九月 September
SER	服務 Service or servicing or served
SEV	嚴重的 Severe (used e.g. to qualify icing and turbulence reports)
SFC	地面 Surface
SG	雪粒 Snow grains
SGL	信號 Signal
SH...	陣...(後接天氣現象) Shower (followed by RA = rain, SN = snow, PL = ice pellets, GR = hail, GS = small hail and/or snow pellets or combinations thereof, e.g. SHRASN = showers of rain and snow)
SHF	極高頻 (3000 MHz至30000MHz) Super high frequency (3000 MHz to 30000MHz)
SI	國際單位制 International system of units
SIAP*	標準儀器進場程序 Standard instrument approach procedure
SID	標準儀器離場 Standard instrument departure
SIF	雷達信標選擇識別特性 Selective identification feature
SIG	顯著的 Significant
SIGMET	影響航空器安全之航路天氣及大氣其他天氣情況 Information concerning en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations
SIGWX*	顯著天氣 Significant weather
SIMUL	同時的 Simultaneous or simultaneously
SIWL	單輪負重 Single isolated wheel load
SKED	預定時程或預計 Schedule or scheduled
SLP	速度限制點 Speed limiting point

SLW	慢 Slow
SMC	地面活動管制 Surface movement control
SMR	機場場面雷達 Surface movement radar
SN	雪 Snow
SNOCLO	機場因積雪關閉 (用於METAR/SPECI報) Aerodrome closed due to snow (used in the METAR/SPECI)
SNOWTAM	冰雪公告 Special series NOTAM notifying the presence or removal of hazardous conditions due to snow, ice, slush or standing water associated with snow, slush and ice on the movement area, by means of a specific format
SOC	爬升起始點 Start of climb
SPECI	機場特別天氣報告 (氣象電碼) Aerodrome special meteorological report (in meteorological code)
SPECIAL	特別氣象報告 (簡縮明語) Local special meteorological report (in abbreviated plain language)
SPI	特別位置識別脈衝 Special position indicator
SPL	飛航計畫補充資料 (電報型式代字) Supplementary flight plan (message type designator)
SPOC	搜救接觸點 SAR point of contact
SPOT	定點風向風速之測報 Spot wind
SQ	颶 Squall
SQL	颶線 Squall line
SR	日出 Sunrise
SRA	搜索雷達進場 Surveillance radar approach
SRE	精確進場雷達系統之搜尋雷達 Surveillance radar element of precision approach radar system
SRG	短距離 Short range
SRR	搜尋與救援區 Search and rescue region
SRY	次級的 Secondary
SS	沙暴 Sandstorm
SS	Sunset 日沒
SSALR*	加設跑道對正指示燈之高亮度簡易進場燈光系統 Simplified short approach lighting system with runway alignment indicator lights
SSB	單旁波帶 Single sideband
SSE	南南東 South-south-east
SSR	次級搜索雷達 Secondary surveillance radar

SST	超音速運輸機 Supersonic transport
SSW	南南西 South-south-west
ST	層雲 Stratus
STA	直接進場 Straight-in approach
STAR	標準儀器到場航線 Standard instrument Arrival
STD	標準 Standard
STF	層狀雲 Stratiform
STN	電臺 Station
STNR	固定的・滯留的 Stationary
STOL	短場起降 Short take-off and landing
STS	狀況 Status
STWL	緩衝區燈 Stopway light(s)
SUBJ	受制於 Subject to
SUN	星期日 Sunday
SUP	飛航指南補充通知書 Supplement (AIP Supplement)
SUPPS	地區補充程序 Regional supplementary procedures
SVC	公務 (僅用於電報型式) Service (message type only)
SVCBL	可用的 Serviceable
SVFR*	特種目視飛航 Special Visual Flight Rules
SW	西南 South-west
SWIM*	全系統資訊管理 System-Wide Information Management
SWB	西南向 South-westbound
SWX	太空氣象 Space weather
SWXC	太空氣象中心 Space weather centre
SWY	緩衝區 Stopway

T - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
T	溫度 Temperature

...T	真方位(前接一方位以示相對於真北) True (preceded by a bearing to indicate reference to True North)
TA	轉換高度 Transition altitude
TA	接近警告 Traffic advisory
TAA	終端到場高度 Terminal arrival altitude
TACAN	太康臺 UHF tactical air navigation aid
TAF	機場預報 (氣象電碼) Aerodrome forecast (in meteorological code)
TA/H	在指定高度/實際高度轉彎 Turn at an altitude/height
TAIL	順風 Tail wind
TAR	終端區域搜索雷達 Terminal area surveillance radar
TAS	真空速 True airspeed
TAX	滑行 Taxiing or taxi
TC	熱帶氣旋 Tropical cyclone
TCAC	熱帶氣旋警告中心 Tropical cyclone advisory centre
TCAS*	空中防撞系統 Traffic alert and collision avoidance system
TCAS RA	空中航情避撞諮詢警示 Traffic alert and collision avoidance system resolution advisory
TCH	通過跑道頭實際高度 Threshold crossing height
TCU	塔狀積雲 Towering cumulus
TDO	龍捲風 Tornado
TDZ	著陸區 Touchdown zone
TECR	技術理由 Technical reason
TEL	電話 Telephone
TEMPO	暫時的 Temporary or temporarily
TF	航跡至航點 (用於導航資料庫編碼) Track to fix
TFC	交通 Traffic
TGL	連續起降 Touch-and-go landing
TGS	滑行導引系統 Taxiing guidance system
THR	跑道頭或跑道起點 Threshold
THRU	經 Through

THU	星期四 Thursday
TIBA	航空器航情廣播 Traffic information broadcast by aircraft
TIL	直到或至 Until
TIP...	直到通過... (某地) Until past....(followed by place)
TKOF	起飛 Take-off
TL...	直到 (後接預報天氣變化結束時間) Till (followed by time by which weather change is forecast to end)
TLOF	起降區 Touchdown and lift-off area
TMA	終端管制區域 Terminal control area
TN...	最低溫度 (後接數字 · 用於TAF報) Minimum temperature (followed by figures in TAF)
TNA	轉彎高度 Turn altitude
TNH	轉彎實際高度 Turn height
TO...	至...(地點) To...(followed by place)
TOC	爬升頂端 Top of climb
TODA	可用之起飛距離 Take-off distance available
TODAH	直昇機可用起飛距離 Take-off distance available, helicopter
TOP	雲頂 Cloud top
TORA	可用之起飛滾行距離 Take-off run available
TOX	有毒的 Toxic
TP	轉彎點 Turning point
TR	航跡 Track
TRA	暫時保留空域 Temporary reserved airspace
TRANS	發射或發射機 Transmits or transmitter
TREND	趨勢預報 Trend forecast
TRG	訓練 Training
TRL	轉換空層 Transition level
TROP	對流層頂 Tropopause
TS	雷暴 Thunderstorm (in aerodrome reports and forecasts, TS used alone means thunder heard but no precipitation at the aerodrome)

TS...	雷暴 (伴隨雨、雪、冰珠、冰雹、小冰雹或雪珠等天氣現象) Thunderstorm (followed by RA = rain, SN = snow, PL = ice pellets, GR = hail, GS = small hail and/or snow pellets or combinations thereof, e.g. TSRASN = thunderstorm with rain and snow)
TSUNAMI	海嘯(用於機場警報) Tsunami (used in aerodrome warnings)
TT	電傳印字機 Teletypewriter
TUE	星期二 Tuesday
TURB	亂流 Turbulence
T-VASIS	T型目視進場滑降指示燈 T visual approach slope indicator system
TVOR	終端多向導航臺 Terminal VOR
TWR	機場管制塔臺或機場管制 Aerodrome control tower or aerodrome control
TWY	滑行道 Taxiway
TX...	最高溫度 (後接數字，用於TAF報) Maximum temperature (followed by figures in TAF)
TXL	滑行路徑 Taxilane
TXT	報文內容 (用於航空固定通信服務作為程序信號) Text (when the abbreviation is used to request a repetition, the question mark (IMI) precedes the abbreviation, e.g. IMI TXT) (to be used in AFS as a procedure signal)
TYP	機型 Type of aircraft
TYPH	颱風 Typhoon

U - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
U	上升 (RVR值在過去10分鐘的趨勢) Upward (tendency in RVR during previous 10 minutes)
UA	無人駕駛航空器 Unmanned aircraft
UAB	直到...通知 Until advised by...
UAC	高空區域管制中心 Upper area control centre
UAR	高空航線 Upper air route
UAS	無人駕駛航空器系統 Unmanned aircraft system
UAV*	無人飛行載具 Unmanned aerial vehicle
UDF	超高頻定向臺 Ultra high frequency direction-finding station
UFN	待後續通告 Until further notice
UHDT	因航情無法更高 Unable higher due traffic
UHF	超高頻 Ultra high frequency (300 to 3000 MHz)
UIC	高空情報中心 Upper information centre

UIR	高空飛航情報區 Upper flight information region
ULM	超輕型載具 Ultra light motorized aircraft
ULR	超長程 Ultra long range
UNA	不能 Unable
UNAP	不能同意 Unable to approve
UNL	無限的 Unlimited
UNREL	不可靠的 Unreliable
UP	不明降水 (使用於自動編發之METAR/SPECI報) Unidentified precipitation (used in automated METAR/ SPECI)
U/S	無法使用的 Unserviceable
UTA	高空管制區域 Upper control area
UTC	世界標準時間 Coordinated Universal Time

V - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
...V...	平均風向變化 (用於METAR/SPECI報 · 前後接數字 · 例如350V070) Variations from the mean wind direction (preceded and followed by figures in METAR/SPECI, e.g. 350V070)
VA	航向至指定高度 (用於導航資料庫編碼) Heading to an altitude
VA	火山灰 Volcanic ash
VAAC	火山灰警告中心 Volcanic ash advisory centre
VAC...	目視進場圖 Visual approach chart (followed by name/title)
VAL	在山谷 In valleys
VAN	跑道管制車 Runway control van
VAR	視聽無線電導航臺 Visual-aural radio range
VAR	磁差 Magnetic variation
VASIS	目視進場滑降指示燈 Visual approach slope indicator systems
VC...	機場附近 (後接天氣現象) Vicinity of the aerodrome (followed by FG = fog, FC = funnel cloud, SH = shower, PO = dust/sand whirls, BLDU = blowing dust, BLSA = blowing sand, BLSN = blowing snow, DS = duststorm, SS = sandstorm, TS = thunderstorm or VA = volcanic ash, e.g. VCFG = vicinity fog)
VCY	附近 Vicinity
VDF	特高頻定向臺 Very high frequency direction-finding station
VDP*	目視下降點 Visual Descent Point

VER	垂直的 Vertical
VFR	目視飛航規則 Visual flight rules
VHF	特高頻 (30 to 300 MHz) Very high frequency (30 to 300 MHz)
VI	航向至攔截 (用於導航資料庫編碼) Heading to an intercept
VIP	極重要人員 Very important person
VIS	能見度 Visibility
VLF	特低頻 (3 to 30kHz) Very low frequency (3 to 30kHz)
VLR	特長程 Very long range
VM	航向至人工終止(引導) (用於導航資料庫編碼) Heading to a manual termination
VMC	目視天氣情況 Visual meteorological conditions
VNAV	垂直導航 (to be pronounced "VEE-NAV") Vertical navigation
VOL...	卷 (後接I、II...) Volume (followed by I, II...)
VOLMET	航空氣象資料 Meteorological information for aircraft in flight
VOR	特高頻多向導航臺 VHF omnidirectional radio range
VORTAC	多向導航太康臺 VOR and TACAN combination
VOT	機載多向導航臺收訊試驗設備 VOR airborne equipment test facility
VPA	垂直進場角度 Vertical path angle
VPT	依指定航跡進行目視操作 Visual maneuver with prescribed track
VRB	變動的 Variable
VSA	目視參考地面 By visual reference to the ground
VSP	垂直速度 Vertical speed
VTF	引導至最後進場 Vector to final
VTOL	垂直起降 Vertical take-off and landing
VV...	垂直能見度 (後接數字 · 用於METAR/SPECI及TAF報) Vertical visibility (followed by figures in METAR/SPECI and TAF)

W - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
W...	海平面溫度 (後接數字 · 用於METAR/SPECI報) Sea-surface temperature (followed by figures in METAR/SPECI)
W	西或西經 West or western longitude

W	白色 White
WAAS	廣域增強系統 Wide area augmentation system
WAC...	1:1,000,000世界航圖 World Aeronautical Chart-ICAO 1:1000000 (followed by name/title)
WAFC	世界區域預報中心 World area forecast centre
WB	西向 Westbound
WBAR	翼排燈 Wing bar lights
WDI	風向指示器 Wind direction indicator
WDSR	廣佈的 Widespread
WED	星期三 Wednesday
WEF	自...生效 With effect from or effective from
WHO *	世界衛生組織 World Health Organization
WGS-84	世界大地系統-1984 World Geodetic System - 1984
WI	其中 Within
WID	寬 Width or wide
WIE	即時生效 With immediate effect or effective immediately
WILCO	照辦 Will comply
WIND	風 Wind
WIP	工程在進行中 Work in progress
WKN	減弱或減弱中 Weaken or weakening
WNW	西北西 West-north-west
WMO *	世界氣象組織 World Meteorological Organization
WO	不含 Without
WPT	航點 Way-point
WRNG	警告 Warning
WS	風切 Wind shear
WSPD	風速 Wind speed
WSW	西南西 West-south-west
WT	重量 Weight

WTSPT	水龍捲 Waterspout
WWW	全球資訊網 Worldwide web
WX	天氣 Weather
WXR	氣象雷達 Weather radar

X - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
X	橫過 Cross
XBAR	進場燈光系統之橫排燈 Crossbar (of approach lighting system)
XNG	橫過 Crossing
XS	天電 (自然電磁波 · 天電干擾) Atmospherics

Y - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
Y	黃色 Yellow
YCZ	跑道燈光之黃色注意地帶 Yellow caution zone (runway lighting)
YES	是 (用於航空固定通信服務作為程序信號) Yes (affirmative) (to be used in AFS as a procedure signal)
YR	你的 Your

Z - A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	
Z	世界標準時間(用於氣象電報) Coordinated Universal Time (in meteorological messages)

← GEN 3.5 氣象服務

3.5.1 服務提供責任單位

3.5.1.1 氣象主管機關

民用航空局

地址：105008臺北市敦化北路340號，臺灣，中華民國

TEL：886-2-23496398

FAX：886-2-23496122

AFS：RCTPYAYX

3.5.1.2 氣象服務提供者

1. 飛航服務總臺臺北航空氣象中心

地址：33742桃園市大園區園航路60號，臺灣，中華民國

TEL: 886-3-3841454

FAX: 886-3-3865575

AFS:RCTPYMYX

2. 空軍氣象聯隊

The Weather Wing ROCAF

TEL: 886-2-27326840 extension 275676

3.5.1.3 本區航空氣象服務按照下列國際民航組織文件之規定實施

Annex 3 Meteorological Service for International Air Navigation

Doc 10157 Procedures for Air Navigation Services - Meteorology (PANS-MET)

Doc 7030 Regional Supplementary Procedures (MID/ASIA Chapter 12)

Doc 8896 Manual of Aeronautical Meteorological Practice

與相關規定相異處詳如GEN 1.7。

3.5.2 責任範圍

臺北飛航情報區。

GEN 3.5 METEOROLOGICAL SERVICES

3.5.1 RESPONSIBLE SERVICE

3.5.1.1 Meteorological Authority

Civil Aviation Administration

Address: No.340, Dunhua N. Rd., Taipei City 105008, Taiwan (R.O.C.)

TEL：886-2-23496398

FAX：886-2-23496122

AFS：RCTPYAYX

3.5.1.2 Meteorological Service Provider

1. Taipei Aeronautical Meteorological Center, Air Navigation and Weather Services (ANWS).

Post address: No.60, Yuanhang Rd., Dayuan District, Taoyuan City 33742, Taiwan (R.O.C.)

TEL: 886-3-3841454

FAX: 886-3-3865575

AFS:RCTPYMYX

2. The Weather Wing ROCAF

TEL: 886-2-27326840 extension 275676

3.5.1.3 The service is provided in accordance with the provisions contained in the following ICAO documents

Annex 3 Meteorological Service for International Air Navigation

Doc 10157 Procedures for Air Navigation Services - Meteorology (PANS-MET)

Doc 7030 Regional Supplementary Procedures (MID/ASIA Chapter 12)

Doc 8896 Manual of Aeronautical Meteorological Practice

Differences from these provisions are detailed in GEN 1.7.

3.5.2 AREA OF RESPONSIBILITY

Meteorological service is provided within Taipei FIR.

3.5.3 氣象觀測及報告

3.5.3 METEOROLOGICAL OBSERVATIONS AND REPORTS

3.5.3.1 氣象服務提供者—飛航服務總臺臺北航空氣象中心

3.5.3.1 Meteorological Service Provider—Taipei Aeronautical Meteorological Center, Air Navigation and Weather Services (ANWS)

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報 告類型及 趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
金門 KINMEN RCBS	h, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程感應器(向前散射儀) RVR sensor (Forward-scatter meter) See AD chart • 雲高計 Ceilometer R06 TDZ R24 TDZ • 溫度溼度感應器 Temperature and relative humidity sensor R06 TDZ R24 TDZ • 氣壓感應器 Pressure sensor R06 TDZ R24 TDZ • 自動雨量計 Precipitation gauge R06 TDZ R24 TDZ	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報告類型及趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
望安 WANG-AN RCWA	H, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI	• 風向風速計 Wind sensor (Anemometer) See AD chart • 向前散射儀 Forward-scatter meter R02 TDZ • 雲高計 Ceilometer R02 TDZ • 溫度溼度感應器 Temperature and relative humidity sensor R02 TDZ • 氣壓感應器 Pressure sensor R02 TDZ • 自動雨量計 Precipitation gauge R02 TDZ	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

h: 每半小時例行觀測
H: 每小時例行觀測
S: 特別觀測

h: half hourly routine observation
H: hourly routine observation
S: special observation

註1: 自動氣象觀測系統(AWOS)由各種感應器組成，通常包括風向風速計、跑道視程感應器、向前散射儀、雲高計、溫度溼度感應器、氣壓感應器及自動雨量計等。

註2: 如需氣候資訊請洽臺北航空氣象中心。

Note 1: AWOS consists of various sensors, usually includes Wind sensor, RVR sensor, Forward-scatter meter, Ceilometer, Temperature and relative humidity sensor, Pressure sensor, Precipitation gauge.

Note 2: Climatological Summaries available at Taipei Aeronautical Meteorological Center

3.5.3.2 氣象服務提供者—空軍氣象聯隊

3.5.3.2 Meteorological Service Provider—The Weather Wing ROCAF

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報告類型及趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
嘉義 CHIAYI RCKU	h 2000-1400, H 1400-2000, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程(背景光感應器) RVR (Ambient light sensor) See AD chart • 能見度儀與即時天氣監測系統 Visibility and present weather sensor R18/36 TDZ/END • 落雷偵測器 Lightning detection R18/36 MID • 雲高計 Ceilometer R18/36 TDZ/END	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾
臺中/清泉崗 TAICHUNG/ CINGCYUAN- GANG RCMQ	h 2000-1400, H 1400-2000, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程(背景光感應器) RVR (Ambient light sensor) See AD chart • 能見度儀與即時天氣監測系統 Visibility and present weather sensor R18/36 TDZ/END • 落雷偵測器 Lightning detection R18/36 MID • 雲高計 Ceilometer R18/36 TDZ/END	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報告類型及趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
臺南 TAINAN RCNN	h 2000-1400, H 1400-2000, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	- 風向風速計 Wind sensor (Anemometer) See AD chart - 跑道視程(背景光感應器) RVR (Ambient light sensor) See AD chart - 能見度儀與即時天氣監測系統 Visibility and present weather sensor R18L/36R TDZ/END - 落雷偵測器 Lightning detection R18L/36R MID - 雲高計 Ceilometer R18L/36R TDZ/END	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾
澎湖 PENGHU RCQC	h 2000-1400, H 1400-2000, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	- 風向風速計 Wind sensor (Anemometer) See AD chart - 跑道視程(背景光感應器) RVR (Ambient light sensor) See AD chart - 能見度儀與即時天氣監測系統 Visibility and present weather sensor R02/20 TDZ/END - 落雷偵測器 Lightning detection R02/20 MID - 雲高計 Ceilometer R02/20 TDZ/END	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報 告類型及 趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
花蓮 HUALIEN RCYU	h 2000-1400, H 1400-2000, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程(背景光感應器) RVR (Ambient light sensor) See AD chart • 能見度儀與即時天氣監測系統 Visibility and present weather sensor R03/21 TDZ/END • 落雷偵測器 Lightning detection R03/21 MID • 雲高計 Ceilometer R03/21 TDZ/END	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

h: 每半小時例行觀測
H: 每小時例行觀測
S: 特別觀測

h: half hourly routine observation
H: hourly routine observation
S: special observation

註1: 自動氣象觀測系統(AWOS)由各種感應器組成，通常包括風向風速計、背景光感應器、能見度儀與即時天氣監測系統、落雷偵測器、雲高計等。

註2: 如需氣候資訊請洽國防部空軍司令部申請 TEL : 886-2-25321610 extension 673261。

Note 1: AWOS consists of various sensors, usually includes Wind sensor, Ambient light sensor, Visibility and present weather sensor, Lightning detection, Ceilometer.

Note 2: Climatological Summaries available at Air Force Command Headquarters TEL: 886-2-25321610 extension 673261

3.5.4 服務種類

1. 飛航前之氣象服務

所需各項天氣資料 (包括24小時 FL300、FL340、和 FL390預測圖、24小時航路顯著危害天氣預測圖、終端機場預報及臺灣桃園國際機場起飛預報等) 應由駕駛員或航空公司代表於飛航前，儘早通知臺灣桃園國際機場、高雄國際機場、臺北/松山機場飛航諮詢臺，情況許可時航詢員應對駕駛員作天氣講解，或經由電話提供所需之氣象資料。

2. 飛航中之氣象服務

起降氣象情況及短時之趨勢預報全日24小時均附於定時天氣報告中，為保障停放飛機之安全，飛航諮詢臺備有機場警報資料，以供駕駛員參考。

3.5.5 氣象服務之申請

航空公司代表或駕駛員須於起飛前24小時通知機場飛航諮詢臺，如有提前、延遲、或取消起飛、或需額外之服務時亦須及早通知機場飛航諮詢單位，以利提供氣象服務。

3.5.6 空中報告 (AIREP)

依國際民航組織第3號附約第5章，當使用陸空資料鏈路且使用自動回報監視—協定(ADS-C)或次級監視雷達S模式(SSR)等裝備時，得於航路階段每15分鐘及爬升階段之前10分鐘每30秒，提供自動例行性觀測。另當航空器遭遇或觀測到下列情況時，應編報特別航空器觀測報告：

1. 中度或強烈亂流。
2. 中度或強烈積冰。
3. 強烈山岳波。
4. 雷暴：無伴隨造成視線不明的、隱藏的、大範圍或飆線之冰雹。
5. 雷暴：有伴隨造成視線不明的、隱藏的、大範圍或飆線之冰雹。
6. 大塵暴或大沙暴。
7. 火山灰雲。

3.5.4 TYPES OF SERVICES

1. Pre-flight operational planning

Weather information, including the 24-hour FL300, FL340 and FL390 prognostic charts, the 24-hour en-route significant weather prognostic chart, terminal aerodrome forecasts and forecasts for take-off in Taipei/Taiwan Taoyuan International Airport, is given to the pilot-in-command or operator's representative for each flight by notifying the Taipei/Taiwan Taoyuan International Airport, Kaohsiung International Airport, Taipei/Songshan Airport Flight Information Station as earlier as possible. Whenever possible, the pilot-in-command is given a verbal briefing by a flight information specialist face to face, or this service may be carried out by telephone from an appropriate meteorological office.

2. In-flight operational planning

Landing or take-off weather conditions and trend-type forecasts are provided in METAR form available throughout 24 hours of the day. Aerodrome warnings, for the purpose of protecting parked aircraft, are available at the airport Flight Information Station.

3.5.5 NOTIFICATION REQUIRED FROM OPERATORS

The operator's local representative, or the pilot-in-command should notify the airport Flight Information Station of the purpose to obtain weather service normally H24 before the estimated time of departure and whenever any flights are advanced, delayed or cancelled, or extra requirements are needed, requests should be made as earlier as possible.

3.5.6 AIREP

Pursuant to Annex 3, Chapter 5, when air-ground data link is used and automatic dependent surveillance — contract (ADS-C) or secondary surveillance radar (SSR) Mode S is being applied, automated routine observations should be made every 15 minutes during the en-route phase and every 30 seconds during the climbout phase for the first 10 minutes of the flight. Special observations shall be made by all aircraft whenever the following conditions are encountered or observed:

1. moderate or severe turbulence; or
2. moderate or severe icing; or
3. severe mountain wave; or
4. thunderstorms, without hail, that are obscured, embedded, widespread or in squall lines; or
5. thunderstorms, with hail, that are obscured, embedded, widespread or in squall lines; or

8. 爆發前之火山活動或火山爆發。
9. 遇到跑道煞車狀況不如報告所述情形。
6. heavy dust storm or heavy sandstorm; or
7. volcanic ash cloud; or
8. pre-eruption volcanic activity or a volcanic eruption; or
9. runway braking action encountered is not as good as reported.

3.5.7 航空氣象資料廣播

3.5.7 VOLMET SERVICE

臺名 Name of station	呼號/識別/ 縮寫(EM) CALL SIGN/ IDENT/ Abbreviation (EM)	頻率 Frequency	廣播時段 Broadcast period	播報週期 Hours of service	涵蓋機場 Aerodromes/ Heliports included	空中報告・顯著危害天氣・預報&備註 REP, SIGMET INFO, FCST & Remarks
1	2	3	4	5	6	7
TAIPEI	TAIPEI VOLMET (A3A)	124.4MHZ	H24	CONS	臺灣桃園、高雄 RCTP, RCKH	SIGMET, AIRMET, METAR/SPECI and TAF

3.5.8 顯著危害天氣(SIGMET)及低空危害天氣(AIRMET)服務

3.5.8 SIGMET AND AIRMET SERVICE

守視臺名 / 航用地名 Name of MWO/location indicators	作業時間 Hours	相關飛航情報區 FIR or CTA served	SIGMET型態 / 有效時間 Type of SIGMET/ validity	特定 SIGMET程序 Specific SIGMET procedures	AIRMET程序 AIRMET procedures	接受資訊之飛航服務單位 ATS unit served
1	2	3	4	5	6	7
臺北航空氣象中心 Taipei Aeronautical Meteorological Center RCTPYMYX	H24	臺北飛航情報區 Taipei FIR	SIGMET/4小時・火山灰及熱帶氣旋之SIGMET可展延至6小時 SIGMET/4HR, Volcanic ash and tropical cyclone SIGMET can be extended to 6HR.	NIL	24小時發布有效時間4小時 Issued H24 Validity 4HR	臺北區域管制中心 Taipei ACC

1. 通則

為維護飛航安全，臺北航空氣象中心持續守視影響飛航操作之天氣狀況，並發布臺北飛航情報區低空之AIRMET與高空之SIGMET資訊，此外，依據區域協議由各機場氣象單位發布機場警報給航空公司駕駛員。

1. General

For the safety of air traffic, TAMC (Taipei Aeronautical Meteorological Center) maintain a continuous watch over meteorological conditions affecting flight operations within the lower and upper Taipei FIR and when necessary, SIGMET and AIRMET information is issued by TAMC. Furthermore, aerodrome warnings are issued to operators, in accordance with local arrangements, by all aeronautical MET offices at aerodromes.

2. 氣象守視

氣象守視工作由臺北航空氣象中心負責，並依據國際民航組織第3號附約第7章發布SIGMET及AIRMET。
臺北航空氣象中心負責適時編發SIGMET。發布有關本區已觀測到或預期將發生的以下顯著危害天氣現象。

- a. 雷暴
- b. 熱帶氣旋
- c. 強烈亂流
- d. 強烈積冰
- e. 強烈山岳波
- f. 大沙暴或塵暴
- g. 火山灰
- h. 輻射雲

3. 機場警報

機場警報為保護停機或機場內其他裝備，由各機場之航空氣象臺於下列狀況下發布：

- a. 雷暴
- b. 地面強風及陣風
- c. 颱風線

4. SIGMET/AIRMET資訊對飛行中航空器之發布
SIGMET及AIRMET資訊24小時對航空器廣播。

2. Meteorological watch

The meteorological watch is performed by TAMC. The TAMC issues SIGMET and AIRMET information in accordance with Annex 3, Chapter 7.
The TAMC is responsible for issuing information in the form of SIGMET message about the occurrence and/ or expected occurrence of the following significant meteorological phenomena:

- a. Thunderstorm
- b. Tropical cyclone
- c. Severe turbulence
- d. Severe icing
- e. Severe mountain wave
- f. Heavy sandstorm/dust storm
- g. Volcanic ash
- h. Radioactive cloud

3. Aerodrome warnings

Aerodrome warnings for the protection of parked aircraft or of other equipment at the airport are issued by all aerodrome meteorological offices, if one or several of the following phenomena are expected to occur at the airport:

- a. Thunderstorm
- b. Strong surface winds and gusts
- c. Squall

4. Dissemination of SIGMET/AIRMET information to aircraft in flight
SIGMET and AIRMET information is disseminated, in addition to directed transmissions to aircraft general calls, as an aeronautical broadcast 24 hours

3.5.9 其他自動氣象服務

3.5.9 OTHER AUTOMATED METEOROLOGICAL SERVICES

服務名稱 Services name	可取得資訊 Information available	地區、航路及涵蓋機場 Area, route and aerodrome coverage	電話、傳真號碼網址 Telephone, FAX numbers HTTP
航空氣象服務網 Aeronautical Meteorological Service Page	雷達、衛星、機場例行天氣報告、空中報告、機場預報、顯著危害天氣;風場、溫度場、結冰高度、溼度場、亂流、積冰、探空、航路、顯著天氣預報圖及高空風及溫度預報圖。 Radar, Satellite, METARs, AIREPs, TAFs, SIGMETs, Winds, Temps, FZ Level, Humidity, Turbulence, Icing, Soundings, Route, SIGWX PROG CHARTs, Upper wind and temperature chart.	由臺北飛航情報區至歐洲、北美洲及紐澳地區 From Taipei FIR to Europe, North America, Australia and New Zealand	TEL: 886-3-3841454 FAX: 886-3-3865575 https://aoaws.anws.gov.tw

ENR 3.2 Q14	ENR 3.2 Q14 - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 R200 - 1
ENR 3.2 R200	ENR 3.2 R200 - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 R596 - 1
ENR 3.2 R596	ENR 3.2 R596 - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T1 RNAV TRANSITION - 1
ENR 3.2 T1 RNAV TRANSITION	ENR 3.2 T1 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T11 RNAV TRANSITION - 1
ENR 3.2 T11 RNAV TRANSITION	ENR 3.2 T11 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T13 RNAV TRANSITION - 1
ENR 3.2 T13 RNAV TRANSITION	ENR 3.2 T13 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T15 RNAV TRANSITION - 1
ENR 3.2 T15 RNAV TRANSITION	ENR 3.2 T15 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T3 RNAV TRANSITION - 1
ENR 3.2 T3 RNAV TRANSITION	ENR 3.2 T3 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T5 RNAV TRANSITION - 1
ENR 3.2 T5 RNAV TRANSITION	ENR 3.2 T5 RNAV TRANSITION - 1
ENR 3.2 區域航行 (RNAV) 航路/ AREA NAVIGATION (RNAV) ROUTES	ENR 3.2 T7 RNAV TRANSITION - 1
ENR 3.2 T7 RNAV TRANSITION	ENR 3.2 T7 RNAV TRANSITION - 1
ENR 3.3 目視航線/ Helicopter routes	ENR 3.3 - 1
3.3.1 小型航空器目視飛航相關規定/ RULES GOVERNING SMALL AIRCRAFT VFR FLIGHT	ENR 3.3 - 1
3.3.2 通訊追蹤地區之劃分及職責/ RESPONSIBILITY AND SECTORIZATION OF FLIGHT FOLLOWING AREA	ENR 3.3 - 2
3.3.3 小型航空器目視走廊/ SMALL AIRCRAFT VFR CORRIDORS	ENR 3.3 - 3
3.3.4 H1及H2直昇機目視航線作業程序/ OPERATIONAL PROCEDURES FOR VFR HELICOPTER ROUTE H1 AND H2	ENR 3.3 - 17
3.3.5 臺北/松山機場直昇機目視飛航作業規定/ TAIPEI/SONGSHAN AD VFR HELICOPTERS OPERATIONAL RULES	ENR 3.3 - 27
3.3.6 限制性目視航線資訊/ INFORMATION OF RESTRICTED VFR ROUTE	ENR 3.3 - 29
ENR 3.4 其他航路/ Other routes	ENR 3.4 - 1
ENR 3.5 航路等待航線/ En-Route holding	ENR 3.5 - 1
ENR 4 無線電助航設施/系統/ 4 RADIO NAVIGATION AIDS/SYSTEMS	ENR 4.1 - 1
ENR 4.1 無線電助航設施—航路/ Radio navigation aids — en-route	ENR 4.1 - 1
ENR 4.2 特別之助航系統/ Special navigation systems	ENR 4.2 - 1
ENR 4.3 全球衛星導航系統 (GNSS)/ Global Navigation Satellite System (GNSS)	ENR 4.3 - 1
ENR 4.4 重要點一覽/ Name-code designators for significant points	ENR 4.4 - 1

ENR 4.5 航空地面燈光—航路/ Aeronautical ground lights — en-route	ENR 4.5 - 1
ENR 5 航行警示/ 5 NAVIGATION WARNINGS	ENR 5.1 - 1
ENR 5.1 禁航區·限航區及危險區/ Prohibited, restricted and danger areas	ENR 5.1 - 1
禁航區/ PROHIBITED AREAS	ENR 5.1 - 1
限航區/ RESTRICTED AREAS	ENR 5.1 - 1
危險區/ DANGER AREAS	ENR 5.1 - 17
5.1.1 飛越RCR16限航區之規定/ RESTRICTION ON FLIGHTS OVER RESTRICTED AREA RCR16	ENR 5.1 - 18
ENR 5.2 軍用演習訓練空域及防空識別區/ Military exercise and training areas	ENR 5.2 - 1
5.2.1 軍用演習空域/ MILITARY EXERCISE AREA	ENR 5.2 - 1
5.2.2 軍用訓練空域/ MILITARY TRAINING AREA	ENR 5.2 - 1
5.2.3 防空識別區/ ADIZ	ENR 5.2 - 8
5.2.4 軍用無人駕駛航空器系統(UAS)訓練空域/ MILITARY UAS TRAINING AREAS	ENR 5.2 - 8
ENR 5.3 其他具危險性之活動及潛在危險/ Other activities of a dangerous nature and other potential hazards	ENR 5.3 - 1
5.3.1 其他具危險性之活動/ OTHER ACTIVITIES OF A DANGEROUS NATURE	ENR 5.3 - 1
5.3.1.1 民用訓練空域/ CIVIL TRAINING AREAS	ENR 5.3 - 1
5.3.2 其他潛在危險/ OTHER POTENTIAL HAZARDS	ENR 5.3 - 4
ENR 5.4 航路障礙物/ Air navigation obstacles	ENR 5.4 - 1
ENR 5.5 空中運動及娛樂活動/ Aerial sporting and recreational activities	ENR 5.5 - 1
5.5.1 超輕型載具/ ULTRA-LIGHT VEHICLE	ENR 5.5 - 1
5.5.2 熱氣球/ HOT AIR BALLOON	ENR 5.5 - 15
5.5.3 無動力飛行運動/ PARAGLIDING	ENR 5.5 - 16
ENR 5.6 鳥類遷徙與生態敏感區鳥相/ Bird migration and areas with sensitive fauna	ENR 5.6 - 1
ENR 6 航路圖/ 6 EN-ROUTE CHARTS	ENR 6.1 - 1
ENR 6.1 航路圖及相關附圖/ List of en-route charts	ENR 6.1 - 1

ENR 5.2 軍用演習訓練空域及防空識別區

ENR 5.2 MILITARY EXERCISE AND TRAINING AREAS

5.2.1 軍用演習空域

請參閱每日飛航公告。

5.2.1 MILITARY EXERCISE AREA

Consult NOTAM for latest information.

5.2.2 軍用訓練空域

5.2.2 MILITARY TRAINING AREA



名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
A1 261800N 1212000E - 254500N 1212000E - 254500N 1221500E - 261800N 1221500E - 261800N 1212000E.	4000 FT AMSL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COM- MAND (886-2-27321594)	H24
A2 260000N 1221500E - 251000N 1221500E - 251000N 1225500E - 260000N 1225500E - 260000N 1221500E.	4000 FT AMSL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COM- MAND (886-2-27321594)	H24
A3 265800N 1215800E - 272000N 1222000E - 272000N 1225500E - 260000N 1225500E - 260000N 1221500E - 265800N 1211500E - 265800N 1215800E.	10000 FT AMSL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COM- MAND (886-2-27321594)	H24
A4 214500N 1192000E - 214500N 1202500E - 210500N 1202500E - 210500N 1192000E - 214500N 1192000E.	5000 FT AMSL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COM- MAND (886-2-27321594)	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
A5 214500N 1202500E - 214500N 1213000E - 210500N 1213000E - 210500N 1202500E - 214500N 1202500E.	10000 FT AMSL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COM- MAND (886-2-27321594)	H24
五空域/Area Five 234211N 1195300E - 234211N 1201000E - 231600N 1200618E - 231600N 1194500E - 234211N 1195300E.	3000 FT AMSL / SFC Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
四空域 (A)/Area Four (A) 235800N 1195800E - 235800N 1201900E - 234900N 1201400E - 234900N 1195500E - 235800N 1195800E.	3000 FT AMSL / 2000 FT AMSL Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
四空域 (B)/Area Four (B) 234900N 1195500E - 234900N 1201003E - 234200N 1200903E - 234200N 1195300E - 234900N 1195500E.	3000 FT AMSL / SFC Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
三空域/Area Three 234900N 1205100E - 232800N 1205100E - 232800N 1204200E - 234900N 1205100E.	9000 FT AMSL / 6500 FT AMSL Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
二空域 (東)/Area Two (East) 234900N 1204218E - 234900N 1205100E - 232800N 1204200E - 232800N 1203000E - 234900N 1204218E.	6500 FT AMSL / 3500 FT AMSL Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of activation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
二空域 (西)/Area Two (West) 234900N 1203600E - 234900N 1204218E - 232800N 1203000E - 232800N 1202700E - 234900N 1203600E.	6500 FT AMSL / 1000 FT AMSL Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
CK 244620N 1221700E - 244620N 1223800E - 233000N 1223800E - 233000N 1220100E - 242300N 1221700E - 244620N 1221700E.	UNL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COMMAND (886-2-27321594)	H24
CK1 215000N 1173500E - 220500N 1180400E - 220000N 1185500E - 214000N 1185500E - 212100N 1173500E - 215000N 1173500E.	UNL / SFC Contact: 空軍作戰指揮部 AIR FORCE COMBATANT COMMAND (886-2-27321594)	H24
嘉義/Chiayi 235100N 1201600E - 235200N 1203700E - 233200N 1202900E - 233700N 1200900E - 235100N 1201600E.	3000 FT AMSL / SFC Contact: 空軍第四戰術戰鬥機聯隊作戰科 THE 4TH TACTICAL FIGHTER WING OF ROCAF (886-5-2854087)	H24
歸仁/Gueiren 231800N 1203500E - 225500N 1202600E - 225400N 1201400E - 231800N 1201600E - 231800N 1203500E.	3000 FT AMSL / SFC Contact: 陸軍航特部-歸仁塔臺 ARMY AVIATION AND SPECIAL FORCES COMMAND - GUEIREN TWR (886-6-2397634)	HJ

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of activation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
恆春/Hengchun 220843N 1204228E - 220612N 1204538E - 220141N 1205022E - 215807N 1205126E - 215421N 1205110E - 215826N 1204632E - 215957N 1204538E - 215845N 1204230E - 220235N 1204113E - 220843N 1204228E.	2500 FT AMSL / SFC Contact: 陸軍航特部-恆春龍勤塔臺 海軍陸戰隊三軍聯合作戰訓練基地指揮部作訓科 ARMY AVIATION AND SPECIAL FORCES COMMAND - LONGCIN TWR (886-8-8883590) MARINE CORPS ARMED FORCE JOINT OPERATION TRAINING BASE (886-8-8897277)	HJ
花蓮/Hualien 234700N 1212630E - 234700N 1213030E - 232000N 1212200E - 232000N 1211800E - 234700N 1212630E.	3000 FT AMSL / SFC Contact: 海軍反潛航空指揮部 NAVAL ANTI-SUBMARINE AVIATION COMMAND (886-7-5889341)	HJ
龍潭/Longtan 245800N 1212100E - 245300N 1211700E - 244700N 1211100E - 244400N 1211400E - 242600N 1205300E - 243700N 1204500E - 245400N 1210200E - 245800N 1212100E.	3000 FT AMSL / SFC Contact: 陸軍航特部-龍潭塔臺 ARMY AVIATION AND SPECIAL FORCES COMMAND - LONGTAN TWR (886-3-4704904)	HJ
新社/Sinshe 242600N 1205300E - 234700N 1205900E - 235000N 1204100E - 241500N 1204300E - 242600N 1203900E - 243700N 1204500E - 242600N 1205300E.	3000 FT AMSL / SFC Contact: 陸軍航特部-新社塔臺 ARMY AVIATION AND SPECIAL FORCES COMMAND - SINSHE TWR (886-4-25826539)	HJ

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
左營/Zuoyin 230300N 1203100E - 230300N 1204000E - 224700N 1204000E - 224700N 1202900E - 225200N 1202600E - 225600N 1202600E - 230300N 1203100E.	3000 FT AMSL / SFC Contact: 海軍反潛航空指揮部 NAVAL ANTI-SUBMARINE AVIATION COMMAND (886-7-5889341)	HJ

5.2.2.1 民用航空器申請使用CK、CK1訓練空域作業規定

- 民用航空器需使用CK或CK1空域時，應於實施前1日（最晚須於本地時間1200前）檢附下列資料向飛航管制聯合協調中心(以下簡稱JCC)提出申請。
 - 航空公司名稱。
 - 機型。
 - 機號或呼號。
 - 使用空域及時間。
 - 使用高度。
 - 連絡人員姓名及其電話號碼。
 - JCC接獲航空公司申請時，應即協調空軍作戰指揮部空管中心(ACC)安排分配使用空域及時間，安排妥當後由JCC覆知原申請者，並副知臺北區域管制中心(以下簡稱TACC)。
- 民用航空器使用CK或CK1空域時，其駕駛員應遵守下列規定：
 - 進入CK或CK1空域前，應填報飛航計畫並獲得TACC准許。
 - 確實遵守使用空域及高度。
 - 在CK或CK1空域內應保持無線電良好，並收聽TACC相關無線電頻率及121.5緊急頻率(D波道)，如接獲戰管單位通知有偏離使用空域範圍之虞時，應即採取適當措施，以避免飛越使用空域範圍。
 - 如發現無線電失效，不能按前項規定實施時，應即離開CK或CK1空域，並將航管雷達辨證器置於MODE 3/A 7600電碼，再依飛航規則有關無線電通信失效之規定實施。

5.2.2.1 Regulation of civil aircraft to apply for CK or CK1 training areas

- When applying for CK or CK1 area, a form shall be submitted by applicant with items listed below to JCC one day prior to (no later than 1200 local time) training flight.
 - Airlines.
 - Type of aircraft.
 - Registered number or call sign.
 - Training area to be used and time period.
 - Level or levels to be flown.
 - Name and telephone number of contact point.
 - Upon receipt of application, JCC shall coordinate the ACC to allocate the training area and time period. When application is approved, JCC shall inform the applicant and notify TACC accordingly
- Rules for pilots:
 - A FPL shall be filed and approved by TACC before entering CK or CK1 area.
 - Remain within the training area and maintain level or levels approved.
 - Maintain constant radio vigilance and monitor on frequency 121.5 at all time. Take necessary action to return to training area when notified by military authority or ATC unit.
 - Leave CK or CK1 area in case of radio failure. Set transponder on MODE 3/A 7600 and fly according to the "lost communication procedures".

- e. 民用航空器獲准使用CK或CK1空域後，因故停止實施或擬改變其實施時間與所獲准時間差30分鐘以上者，應向JCC提報，俾另做安排。
- f. 離開航路進入CK或CK1空域時，應作位置報告。訓練完成後，離開CK或CK1空域再進入航路前，應先獲得相關航管單位許可。

- e. If the time period of using CK or CK1 area differs more than 30 minutes from the original flight plan, applicant shall apply to JCC for another arrangement.
- f. Position reports are required before entering CK or CK1 area. After completion of training, approval of leaving CK or CK1 area from ATC unit is required.

5.2.2.2 小型航空器穿越軍用訓練空域通報方式

1. 小型航空器穿越軍用陸上訓練空域除依本通報方式通報相關塔臺外，並應遵守飛航規則有關進入各類空域需建立無線電聯絡之規定。
2. 小型航空器於進出軍用陸上訓練空域前後應與負責該訓練空域之相關塔臺或通訊追蹤席報告；如無法構連，應與相關通訊追蹤席連絡，由通訊追蹤席將相關資料轉知相關塔臺。塔臺應通報訓練空域內之航空器避讓穿越之小型航空器。
3. 小型航空器飛航於目視走廊者，應依下列規定之位置點通報。非於目視走廊飛航者，應於進入 / 離開訓練空域前後通報相關塔臺。
 - a. 龍潭訓練空域：
小型航空器使用下列目視走廊，穿越龍潭訓練空域，應在下列位置點向陸軍龍潭塔臺報告：
C1、C3：鶯歌、三義
C1、C11：鶯歌、外埔
C33：鶯歌系統交流道、關西服務區、竹東
 - b. 新社訓練空域：
小型航空器使用下列目視走廊，穿越新社訓練空域，應在下列位置點向陸軍新社塔臺報告：
C3：三義、臺中
C33：苑裡交流道、后里交流道
 - c. 歸仁訓練空域：
小型航空器使用下列目視走廊，穿越歸仁訓練空域，應在下列位置點向陸軍歸仁塔臺報告：
C13：麻豆、岡山
C35：新化系統交流道、燕巢系統交流道
 - d. 左營訓練空域：
無目視走廊經過
 - e. 花蓮訓練空域：
小型航空器使用下列目視走廊，穿越海軍東部訓練空域，應在下列位置點向臺北 / 高雄通訊追蹤報告：
C12：壽豐、玉里
 - f. 嘉義訓練空域：
小型航空器使用下列目視走廊，穿越嘉義訓練空域，應在下列位置點向嘉義塔臺 / 高雄通訊追蹤報告，並保持於塔臺波道守聽：
C3、C11、C13：西螺、蒜頭
C35：名間、古坑系統交流道、白河
 - g. 恆春訓練空域：

5.2.2.2 Rules of Reporting by Small Aircraft Penetrating Military Training Area

1. Small Aircraft penetrating Military Training area shall report to the related tower as per this rule and abide by the provisions of Rules of the Air in respect of establishing radio communications when entering each class of airspace.
2. Small Aircraft penetrating Military Training area shall report to the tower responsible for this training area, or to the related Flight Following: If unable, the small aircraft shall report to the Flight Following. The Flight Following shall pass the information to the related tower, which shall notify aircraft in that training area to avoid the penetrating small aircraft.
3. Small aircraft flying in VFR corridors shall report at the following reporting points. Aircraft not flying in VFR corridors shall report to the related tower before and after penetrating the Military Training area.
 - a. Longtan Training Area:
Small aircraft using the following VFR corridors and penetrating Longtan Training Area shall report to the Army Longtan Tower at the following points:
C1, C3 : Yingge, Sanyi
C1, C11 : Yingge, Waipu
C33 : Yingge System Interchange, Guansi Service Area, Zhudong
 - b. Sinshe Training Area:
Small aircraft using the following VFR corridors and penetrating Sinshe Training Area, shall report to the Army Sinshe Tower at the following points:
C3 : Sanyi, Taichung
C33 : Yuanli Interchange, Houli Interchange
 - c. Gueiren Training Area:
Small aircraft using the following VFR corridors and penetrating Gueiren Training Area, shall report to the Army Gueiren Tower at the following points:
C13 : Madou, Gangshan
C35 : Sinhua System Interchange, Yanchao System Interchange.
 - d. Zuoyin Training Area:
No penetrating VFR corridors
 - e. Hualien Training Area:
Small aircraft using the following VFR corridors and penetrating East Navy Training Area, shall report to

小型航空器使用下列目視走廊，穿越恆春訓練空域，應在下列位置點向陸軍龍勤塔臺(主頻280.0MHz、備頻247.7MHz、VHF 135.3MHz)報告：

C9：楓港
C15：側過楓港
C8：鵝鑾鼻
C18：恆春

Taipei or Kaohsiung Flight Following at the following points:

C12：Shoufong, Yuli

f. Chiayi Training Area:

Small aircraft using the following VFR corridors and penetrating Chiayi Training Area, shall report to Chiayi Tower or Kaohsiung Flight Following at the following points, and remain monitoring tower frequency:

C3, C11, C13：Siluo, Suantou

C35：Mingjian, Gukeng System Interchange, Baihe

g. Hengchun Training Area:

Small aircraft using the following VFR corridors and penetrating Hengchun Training Area shall report to the Army Longcin Tower(Main: 280.0MHz, Back-up: 247.7MHz, VHF: 135.3MHz) at the following points:

C9: Fonggang

C15: Fly by Fonggang

C8: Eluanbi

C18: Hengchun

5.2.2.3 軍用目視訓練航線

5.2.2.3 MILITARY VFR TRAINING ROUTES

航線名稱 Name	報告點 Reporting Points	無線電可構連高度 Radio COM Altitude	備註 Remarks
C17	▲新竹 Hsinchu	1000FT	此段不受3000FT高度限制。 Not subject to 3000FT altitude limitation.
	△樂山 Leshan	8500FT	
C19	▲臺中 Taichung	500FT	此段不受3000FT高度限制。 Not subject to 3000FT altitude limitation.
	▲谷關 Guguan	5000FT	
	△梨山 Lishan	9000FT	
C21	▲臺中 Taichung	500FT	此段不受3000FT高度限制。 Not subject to 3000FT altitude limitation.
	△日月潭 Sun Moon Lake	3000FT	
C23	▲臺中 Taichung	500FT	此段不受3000FT高度限制，南投、大里附近超輕型載具活動，請參閱ENR 5.5。 Not subject to 3000FT altitude limitation. Ultra-Light Activities around Nantou and Dali, please refer ENR 5.5.
	△南投 Nantou	1000FT	
	△名間 Mingjian	1000FT	
	△鹿谷 Lugu	1500FT	
	▲阿里山 Alishan	8000FT	
C25	▲屏東 Pingtung	500FT	此段不受3000FT高度限制，附近有大鵬灣與南華賽嘉間銜接空域超輕載具活動，請參閱ENR 5.5。 Not subject to 3000FT altitude limitation. Ultra-Light Activities around corridor between DAPENG GULF and NANHUA SAIJIA Area, please refer ENR 5.5.
	△大漢山 Dahanshan	6000FT	
C27	△楓港 Fonggang	1500FT	此段不受3000FT高度限制。 Not subject to 3000FT altitude limitation.
	▲港仔鼻 Gangzihbi	1000FT	

5.2.3 防空識別區

5.2.3 ADIZ

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
臺灣防空識別區/Taiwan ADIZ 210000N 1173000E - 210000N 1213000E - 223000N 1230000E - 290000N 1230000E - 290000N 1173000E - 210000N 1173000E.	UNL / SFC	H24 See ENR 1.12

5.2.4 軍用無人駕駛航空器系統(UAS)訓練空域

5.2.4 MILITARY UAS TRAINING AREAS

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
新竹湖口訓練場/ARMY1 245235N 1210250E - 245234N 1210241E - 245123N 1210045E - 245004N 1210241E - 245116N 1210335E - 245146N 1210528E - 245217N 1210514E - 245235N 1210250E.	400 FT AGL / SFC Contact: 陸軍教育訓練暨準則發展指揮部 (陸 軍教準部) Army Education, Training and Doctrine Development Command (886-3-4093574)	H24
台中竹坑營區/ARMY2 240541N 1204413E - 240532N 1204258E - 240459N 1204256E - 240513N 1204417E - 240541N 1204413E.	1900 FT AMSL / SFC Contact: 陸軍第十軍團指揮部 10th Field Army Command (886-4-25814910)	H24
澎湖五德營區/ARMY3 233125N 1193521E - 233141N 1193505E - 233040N 1193355E - 233014N 1193433E - 233125N 1193521E.	200 FT AGL / SFC Contact: 陸軍澎湖防衛指揮部 Army Penghu Defense Command (886-6-9270162)	H24
台南白河內角營區/ARMY4 232443N 1202844E -	200 FT AGL / SFC	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
232438N 1202700E - 232416N 1202609E - 232249N 1202640E - 232404N 1202900E - 232443N 1202844E.	Contact: 陸軍教育訓練暨準則發展指揮部 (陸 軍教準部) Army Education, Training and Doctrine Development Command (886-3-4093574)	
屏東萬金營區/ARMY5 223649N 1203743E - 223645N 1203702E - 223543N 1203704E - 223545N 1203752E - 223649N 1203743E.	2000 FT AMSL / SFC Contact: 陸軍第八軍團指揮部 8th Field Army Command (886-7-6691577)	H24
高雄仁美營區/ARMY6 223948N 1202442E - 223942N 1202426E - 223917N 1202433E - 223922N 1202458E - 223948N 1202442E.	1400 FT AMSL / SFC Contact: 陸軍第八軍團指揮部 8th Field Army Command (886-7-6691577)	H24
NA-A 253725N 1212710E - 252853N 1211712E - 252500N 1211900E - 252500N 1212800E - 253725N 1212710E.	1500 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NA-B 252500N 1211900E - 252500N 1212800E - 251744N 1212843E - 251555N 1212536E - 252500N 1211900E.	1000 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NA-C 251744N 1212843E - 251555N 1212536E - 251400N 1212700E - 251500N 1212900E - 251744N 1212843E.	400 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NB-A 251800N 1210330E - 250800N 1205100E -	1000 FT AMSL / SFC	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of activation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
250530N 1205307E - 251535N 1210520E - 251800N 1210330E.	Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	
NB-B 250530N 1205307E - 250200N 1205600E - 251200N 1210800E - 251535N 1210520E - 250530N 1205307E.	1000 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NB-C 250200N 1205600E - 245730N 1205920E - 245930N 1210115E - 250400N 1205800E - 250200N 1205600E.	400 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NC-A 244126N 1201605E - 242400N 1200000E - 241709N 1201040E - 243704N 1202853E - 244126N 1201605E.	1500 FT AMSL / SFC Contact: 海軍海鋒第一大隊 Navy (886-4-26580742)	H24
NC-B 241709N 1201040E - 243704N 1202853E - 243400N 1203500E - 241300N 1201700E - 241709N 1201040E.	1000 FT AMSL / SFC Contact: 海軍海鋒第一大隊 Navy (886-4-26580742)	H24
NC-C 243400N 1203500E - 243220N 1203334E - 242805N 1203635E - 242931N 1203813E - 243400N 1203500E.	400 FT AMSL / SFC Contact: 海軍海鋒第一大隊 Navy (886-4-26580742)	H24
NC-D 242805N 1203635E - 242931N 1203813E - 242800N 1203917E - 242633N 1203742E - 242805N 1203635E.	400 FT AMSL / SFC	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of acti- vation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
	Contact: 海軍海鋒第一大隊 Navy (886-4-26580742)	
ND-A 225200N 1195455E - 225200N 1194500E - 224500N 1194500E - 224500N 1195455E - 225200N 1195455E.	1500 FT AMSL / SFC Contact: 海軍海鋒第二大隊 Navy (886-7-5883052)	H24
ND-B 225200N 1195455E - 224500N 1195455E - 224500N 1200300E - 225200N 1200300E - 225200N 1195455E.	1000 FT AMSL / SFC Contact: 海軍海鋒第二大隊 Navy (886-7-5883052)	H24
ND-C 224500N 1200300E - 224700N 1200300E - 224400N 1201000E - 224200N 1201000E - 224500N 1200300E.	1000 FT AMSL / SFC Contact: 海軍海鋒第二大隊 Navy (886-7-5883052)	H24
ND-D 224200N 1201000E - 224400N 1201000E - 224054N 1201559E - 223854N 1201629E - 224200N 1201000E.	1000 FT AMSL / SFC Contact: 海軍海鋒第二大隊 Navy (886-7-5883052)	H24
NE-A 243700N 1215800E - 243634N 1215155E - 243625N 1215127E - 243604N 1215127E - 243500N 1215800E - 243700N 1215800E.	400 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NE-B 243700N 1220656E - 243700N 1215800E - 243500N 1215800E - 243500N 1220625E - 243700N 1220656E.	400 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24

名稱及水平範圍 Name & Lateral Limits	上限/下限 使用宣告方式 民航機須知 Upper/lower limits and system/means of activation announcement INFO for CIV FLT	備註 使用時間 攔截風險(ADIZ) Remarks Time of ACT Risk of interception (ADIZ)
1	2	3
NE-C 242200N 1220300E - 242500N 1221000E - 250000N 1222000E - 250000N 1221300E - 242200N 1220300E.	1500 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24
NE-D 242200N 1220300E - 241200N 1215945E - 241000N 1220600E - 242500N 1221000E - 242200N 1220300E.	1500 FT AMSL / SFC Contact: 海軍海鋒第三大隊 Navy (886-2-28052316轉軍線 684330)	H24

5.2.4.1 軍用無人駕駛航空器系統(UAS)訓練航線

1. 下列UAS訓練航線寬度為各點連線之左右各1NM。
2. UAS訓練航線在終端管制空域範圍內之部分，仍以民航機運作為優先。

5.2.4.1 MILITARY UAS TRAINING ROUTES

1. The width of UAS training routes are 1NM each side to the line connected by points.
2. Civil aircraft have priority over the UAS training routes which is within TMA.

報告點 Reporting Points	經緯度(WGS84) Coordinates (WGS84)	高度(FT) Upper/Lower Limits (FT)	報告點 Reporting Points	經緯度(WGS84) Coordinates (WGS84)	高度(FT) Upper/Lower Limits (FT)
屏北機場航線 PINGTUNG NORTH traffic circuit			志航機場航線 JHIHHANG traffic circuit		
SQNW	224222N 1202759E	2500/SFC	GSN/GSF	224851N 1211149E	2500/SFC
SQNE	224246N 1203002E		GSE	224820N 1211246E	
SQE	224215E 1203010E		GSS	224557N 1211057E	
SQW	224150N 1202806E		GSW	224628N 1211008E	
恆春機場航線 HENGCHUN traffic circuit			太麻里起降場航線 TAIMALI traffic circuit		
KW1	220252N 1204325E	2500/SFC	TMLN	223610N 1210019E	2500/SFC
KWA	220239N 1204307E		TMLE	223555N 1210120E	
KWB	220142N 1204359E		TMLS	223402N 1210047E	
KWC	220156N 1204418E		TMLW	223417N 1205946E	
屏東訓練航線 PINGTUNG NORTH training route			志航訓練航線 JHIHHANG training route		
SQ1	224215N 1203010E	4000/SFC	QS1	224724N 1211040E	2500/SFC
SQ2	224325N 1203740E		QS2	224851N 1211149E	
SQ3	223113N 1203758E	6000/SFC	QS3	224818N 1211653E	4000/SFC
SQ4	222035N 1203745E		QS4	224818N 1213200E	
SQ5	221140N 1204100E	4000/SFC	QS5	224818N 1214253E	8000/SFC
KW3	220422N 1204128E		CP1	224818N 1214503E	
			CP2	223100N 1213900E	
恆春訓練航線 HENGCHUN training route			臺東訓練航線 TAITUNG training route		
KW1	220252N 1204325E	4000/SFC	CP2	223100N 1213900E	8000/SFC
KW2	220339N 1204224E		CP3	222000N 1214000E	
KW3	220422N 1204128E		CP4	221600N 1214000E	

報告點 Reporting Points	經緯度(WGS84) Coordinates (WGS84)	高度(FT) Upper/Lower Limits (FT)	報告點 Reporting Points	經緯度(WGS84) Coordinates (WGS84)	高度(FT) Upper/Lower Limits (FT)
KW4	220028N 1204022E		CP5	214053N 1214028E	
KW5	214927N 1204022E		太麻里訓練航線 TAIMALI training route		
KW6	214700N 1204000E		TM1	223402N 1210047E	2500/SFC
CP9	214300N 1203900E	8000/SFC	TM2	223228N 1210500E	
鵝鑾鼻訓練航線 ELUANBI training route			TM3	223201N 1211317E	4000/SFC
CP5	214053N 1214028E	8000/SFC	TM4	223143N 1212120E	
CP6	213700N 1211000E		TM5	223123N 1212855E	
CP7	213700N 1205020E		TM6	223100N 1213722E	
CP8	213700N 1203830E		CP2	223100N 1213900E	8000/SFC
CP9	214300N 1203900E				

RCGI AD 2.5 PASSENGER FACILITIES	AD 2 RCGI - 2
RCGI AD 2.6 救援與消防設備	AD 2 RCGI - 2
RCGI AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCGI - 2
RCGI AD 2.7 可用季節-清除裝備	AD 2 RCGI - 3
RCGI AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCGI - 3
RCGI AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCGI - 3
RCGI AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCGI - 3
RCGI AD 2.9 地面活動導引、管制系統及標線	AD 2 RCGI - 3
RCGI AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS ...	AD 2 RCGI - 3
RCGI AD 2.10 機場障礙物	AD 2 RCGI - 4
RCGI AD 2.10 AERODROME OBSTACLES	AD 2 RCGI - 4
RCGI AD 2.11 氣象資訊之提供	AD 2 RCGI - 4
RCGI AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCGI - 4
RCGI AD 2.12 跑道場面特性	AD 2 RCGI - 5
RCGI AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCGI - 5
RCGI AD 2.13 公布距離	AD 2 RCGI - 6
RCGI AD 2.13 DECLARED DISTANCES	AD 2 RCGI - 6
RCGI AD 2.14 進場及跑道燈光設備	AD 2 RCGI - 6
RCGI AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCGI - 6
RCGI AD 2.15 其他燈光設備及備用電源	AD 2 RCGI - 7
RCGI AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCGI - 7
RCGI AD 2.16 直昇機降落區	AD 2 RCGI - 7
RCGI AD 2.16 HELICOPTER LANDING AREA	AD 2 RCGI - 7
RCGI AD 2.17 飛航服務空域	AD 2 RCGI - 8
RCGI AD 2.17 ATS AIRSPACE	AD 2 RCGI - 8
RCGI AD 2.18 飛航服務無線電通訊設施	AD 2 RCGI - 8
RCGI AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCGI - 8
RCGI AD 2.19 無線電助導航設施	AD 2 RCGI - 9
RCGI AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCGI - 9
RCGI AD 2.20 本場飛航規定	AD 2 RCGI - 9
RCGI AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCGI - 9
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCGI - 9
RCGI AD 2.21 降低噪音程序	AD 2 RCGI - 9
RCGI AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCGI - 9
RCGI AD 2.22 飛航程序	AD 2 RCGI - 9
RCGI AD 2.22 FLIGHT PROCEDURES	AD 2 RCGI - 9
RCGI AD 2.23 其他資訊	AD 2 RCGI - 9
RCGI AD 2.23 ADDITIONAL INFORMATION	AD 2 RCGI - 9
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCGI - 9
RCGI AD 2.24 本場航圖	AD 2 RCGI - 10
RCGI AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCGI - 10
RCGI AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCGI - 15
RCGI AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCGI - 15
AD 2 RCKH 高雄國際KAOHSIUNG INTL	AD 2 RCKH - 1
RCKH AD 2.1 機場航用地名及名稱	AD 2 RCKH - 1
RCKH AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCKH - 1
RCKH AD 2.2 機場地理與管理資料	AD 2 RCKH - 1
RCKH AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCKH - 1
RCKH AD 2.3 作業時間	AD 2 RCKH - 1
RCKH AD 2.3 OPERATIONAL HOURS	AD 2 RCKH - 1
RCKH AD 2.4 裝卸服務與設備	AD 2 RCKH - 2
RCKH AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCKH - 2
RCKH AD 2.5 商旅服務	AD 2 RCKH - 2
RCKH AD 2.5 PASSENGER FACILITIES	AD 2 RCKH - 2
RCKH AD 2.6 救援與消防設備	AD 2 RCKH - 3
RCKH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCKH - 3
RCKH AD 2.7 可用季節-清除裝備	AD 2 RCKH - 3
RCKH AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCKH - 3

RCKH AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCKH - 3
RCKH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCKH - 3
RCKH AD 2.9 地面活動導引、管制系統及標線	AD 2 RCKH - 6
RCKH AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCKH - 6
2.9.1 先進目視停靠導引系統(ADVANCED VISUAL DOCKING GUIDANCE SYSTEM, A-VDGS)之設置/ ADVANCED VISUAL DOCKING GUIDANCE SYSTEM (A-VDGS)	AD 2 RCKH - 7
作業指引/ Operating Instruction	AD 2 RCKH - 7
RCKH AD 2.10 機場障礙物	AD 2 RCKH - 9
RCKH AD 2.10 AERODROME OBSTACLES	AD 2 RCKH - 9
RCKH AD 2.11 氣象資訊之提供	AD 2 RCKH - 10
RCKH AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCKH - 10
RCKH AD 2.12 跑道場面特性	AD 2 RCKH - 11
RCKH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCKH - 11
RCKH AD 2.13 公布距離	AD 2 RCKH - 12
RCKH AD 2.13 DECLARED DISTANCES	AD 2 RCKH - 12
RCKH AD 2.14 進場及跑道燈光設備	AD 2 RCKH - 12
RCKH AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCKH - 12
RCKH AD 2.15 其他燈光設備及備用電源	AD 2 RCKH - 13
RCKH AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCKH - 13
RCKH AD 2.16 直昇機降落區	AD 2 RCKH - 13
RCKH AD 2.16 HELICOPTER LANDING AREA	AD 2 RCKH - 13
RCKH AD 2.17 飛航服務空域	AD 2 RCKH - 14
RCKH AD 2.17 ATS AIRSPACE	AD 2 RCKH - 14
RCKH AD 2.18 飛航服務無線電通訊設施	AD 2 RCKH - 14
RCKH AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCKH - 14
RCKH AD 2.19 無線電助導航設施	AD 2 RCKH - 15
RCKH AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCKH - 15
RCKH AD 2.20 本場飛航規定	AD 2 RCKH - 17
RCKH AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCKH - 17
2.20.1 機場管理單位指引/ AERODROME ADMINISTRATION GUIDELINES	AD 2 RCKH - 17
2.20.2 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCKH - 18
2.20.3 航管許可、開車後推及滑行作業/ ATC CLEARANCE, START-UP, PUSH BACK AND TAXIING	AD 2 RCKH - 19
RCKH AD 2.21 降低噪音程序	AD 2 RCKH - 20
RCKH AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCKH - 20
RCKH AD 2.22 飛航程序	AD 2 RCKH - 20
RCKH AD 2.22 FLIGHT PROCEDURES	AD 2 RCKH - 20
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCKH - 20
2.22.2 目視飛航直昇機於高雄機場離場時之起飛方向及飛航路徑/ DIRECTIONS AND ROUTES FOR VFR HELICOPTERS DEPARTING FROM KAOHSIUNG AD	AD 2 RCKH - 20
2.22.3 目視飛航直昇機於高雄機場離到場飛航時之等待點與報告點/ VISUAL HOLDING AND REPORTING POINTS FOR VFR HELICOPTERS OPERATING AT KAO- HSIUNG AD	AD 2 RCKH - 21
2.22.4 低能見度作業程序/ LOW VISIBILITY PROCEDURES	AD 2 RCKH - 21
RCKH AD 2.23 其他資訊	AD 2 RCKH - 22
RCKH AD 2.23 ADDITIONAL INFORMATION	AD 2 RCKH - 22
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCKH - 22
RCKH AD 2.24 本場航圖	AD 2 RCKH - 24
RCKH AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCKH - 24
RCKH AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCKH - 107
RCKH AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCKH - 107
AD 2 RCKU 嘉義CHIAYI	AD 2 RCKU - 1

RCMT AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCMT - 2
RCMT AD 2.5 商旅服務	AD 2 RCMT - 2
RCMT AD 2.5 PASSENGER FACILITIES	AD 2 RCMT - 2
RCMT AD 2.6 救援與消防設備	AD 2 RCMT - 2
RCMT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCMT - 2
RCMT AD 2.7 可用季節-清除裝備	AD 2 RCMT - 3
RCMT AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCMT - 3
RCMT AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCMT - 3
RCMT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCMT - 3
RCMT AD 2.9 地面活動導引、管制系統及標線	AD 2 RCMT - 4
RCMT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCMT - 4
RCMT AD 2.10 機場障礙物	AD 2 RCMT - 4
RCMT AD 2.10 AERODROME OBSTACLES	AD 2 RCMT - 4
RCMT AD 2.11 氣象資訊之提供	AD 2 RCMT - 5
RCMT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCMT - 5
RCMT AD 2.12 跑道場面特性	AD 2 RCMT - 6
RCMT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCMT - 6
RCMT AD 2.13 公布距離	AD 2 RCMT - 7
RCMT AD 2.13 DECLARED DISTANCES	AD 2 RCMT - 7
RCMT AD 2.14 進場及跑道燈光設備	AD 2 RCMT - 7
RCMT AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCMT - 7
RCMT AD 2.15 其他燈光設備及備用電源	AD 2 RCMT - 8
RCMT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCMT - 8
RCMT AD 2.16 直昇機降落區	AD 2 RCMT - 9
RCMT AD 2.16 HELICOPTER LANDING AREA	AD 2 RCMT - 9
RCMT AD 2.17 飛航服務空域	AD 2 RCMT - 9
RCMT AD 2.17 ATS AIRSPACE	AD 2 RCMT - 9
RCMT AD 2.18 飛航服務無線電通訊設施	AD 2 RCMT - 10
RCMT AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCMT - 10
RCMT AD 2.19 無線電助導航設施	AD 2 RCMT - 10
RCMT AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCMT - 10
RCMT AD 2.20 本場飛航規定	AD 2 RCMT - 12
RCMT AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCMT - 12
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCMT - 12
RCMT AD 2.21 降低噪音程序	AD 2 RCMT - 12
RCMT AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCMT - 12
RCMT AD 2.22 飛航程序	AD 2 RCMT - 13
RCMT AD 2.22 FLIGHT PROCEDURES	AD 2 RCMT - 13
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCMT - 13
2.22.2 雷達備用儀器飛航程序/ BACKUP INSTRUMENT FLIGHT PROCEDURE IN MATSU TMA	AD 2 RCMT - 13
2.22.3 無線電失效程序/ PROCEDURE FOR RADIO COMMUNICATION FAILURE	AD 2 RCMT - 13
RCMT AD 2.23 其他資訊	AD 2 RCMT - 14
RCMT AD 2.23 ADDITIONAL INFORMATION	AD 2 RCMT - 14
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCMT - 14
RCMT AD 2.24 本場航圖	AD 2 RCMT - 15
RCMT AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCMT - 15
RCMT AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCMT - 43
RCMT AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCMT - 43
AD 2 RCNN 臺南TAINAN	AD 2 RCNN - 1
RCNN AD 2.1 機場航用地名及名稱	AD 2 RCNN - 1
RCNN AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCNN - 1
RCNN AD 2.2 機場地理與管理資料	AD 2 RCNN - 1
RCNN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCNN - 1

RCNN AD 2.3 作業時間	AD 2 RCNN - 1
RCNN AD 2.3 OPERATIONAL HOURS	AD 2 RCNN - 1
RCNN AD 2.4 裝卸服務與設備	AD 2 RCNN - 2
RCNN AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCNN - 2
RCNN AD 2.5 商旅服務	AD 2 RCNN - 2
RCNN AD 2.5 PASSENGER FACILITIES	AD 2 RCNN - 2
RCNN AD 2.6 救援與消防設備	AD 2 RCNN - 2
RCNN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCNN - 2
RCNN AD 2.7 可用季節-清除裝備	AD 2 RCNN - 3
RCNN AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCNN - 3
RCNN AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCNN - 3
RCNN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCNN - 3
RCNN AD 2.9 地面活動導引、管制系統及標線	AD 2 RCNN - 4
RCNN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCNN - 4
RCNN AD 2.10 機場障礙物	AD 2 RCNN - 4
RCNN AD 2.10 AERODROME OBSTACLES	AD 2 RCNN - 4
RCNN AD 2.11 氣象資訊之提供	AD 2 RCNN - 5
RCNN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCNN - 5
RCNN AD 2.12 跑道場面特性	AD 2 RCNN - 6
RCNN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCNN - 6
RCNN AD 2.13 公布距離	AD 2 RCNN - 7
RCNN AD 2.13 DECLARED DISTANCES	AD 2 RCNN - 7
RCNN AD 2.14 進場及跑道燈光設備	AD 2 RCNN - 7
RCNN AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCNN - 7
RCNN AD 2.15 其他燈光設備及備用電源	AD 2 RCNN - 8
RCNN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCNN - 8
RCNN AD 2.16 直昇機降落區	AD 2 RCNN - 9
RCNN AD 2.16 HELICOPTER LANDING AREA	AD 2 RCNN - 9
RCNN AD 2.17 飛航服務空域	AD 2 RCNN - 10
RCNN AD 2.17 ATS AIRSPACE	AD 2 RCNN - 10
RCNN AD 2.18 飛航服務無線電通訊設施	AD 2 RCNN - 11
RCNN AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCNN - 11
RCNN AD 2.19 無線電助導航設施	AD 2 RCNN - 12
RCNN AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCNN - 12
RCNN AD 2.20 本場飛航規定	AD 2 RCNN - 13
RCNN AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCNN - 13
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCNN - 13
2.20.2 滑行作業/ TAXIING TO AND FROM STAND	AD 2 RCNN - 14
RCNN AD 2.21 降低噪音程序	AD 2 RCNN - 15
RCNN AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCNN - 15
RCNN AD 2.22 飛航程序	AD 2 RCNN - 16
RCNN AD 2.22 FLIGHT PROCEDURES	AD 2 RCNN - 16
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURE(S)(NON-RNAV PROCEDURES)	AD 2 RCNN - 16
RCNN AD 2.23 其他資訊	AD 2 RCNN - 17
RCNN AD 2.23 ADDITIONAL INFORMATION	AD 2 RCNN - 17
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCNN - 17
RCNN AD 2.24 本場航圖	AD 2 RCNN - 19
RCNN AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCNN - 19
RCNN AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCNN - 55
RCNN AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCNN - 55
AD 2 RCQC 澎湖 PENGHU	AD 2 RCQC - 1
RCQC AD 2.1 機場航用地名及名稱	AD 2 RCQC - 1
RCQC AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCQC - 1
RCQC AD 2.2 機場地理與管理資料	AD 2 RCQC - 1

RCBS AD 2.5 商旅服務
RCBS AD 2.5 PASSENGER FACILITIES

1	住宿設備 Hotels	Unlimited in Kinmen downtown.
2	膳食供應 Restaurants	Limited in the airport
3	聯外交通 Transportation	Taxies, buses.
4	醫療設備 Medical facilities	1 nursing station, Hospital in Kinmen downtown
5	銀行及郵局 Bank and Post Office	Post office and ATM
6	旅客服務中心 Tourist Office	Tourist information center
7	備註 Remarks	NIL

RCBS AD 2.6 救援與消防設備
RCBS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	機場消防等級 AD category for fire fighting	CAT 7
2	救援裝備 Rescue equipment	3000 gallon foam fire engine x3, equipped in accordance with CAT 7.
3	故障航空器之移離能力 Capability for removal of disabled aircraft	Aluminum matting, lifting sling, air bag, dolly and forklift.
4	備註 Remarks	無跑道鋪設泡沫之設施 No facilities for foaming of runways.

RCBS AD 2.7 可用季節-清除裝備
RCBS AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	清除裝備類型 Types of clearing equipment	NIL
2	清除優先順序 Clearance priorities	NIL
3	備註 Remarks	NIL

RCBS AD 2.8 停機坪，滑行道及核驗點位置
RCBS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	停機坪之鋪面與強度 Apron surface and strength	名稱 Designator	鋪面 Surface	強度 Strength
		APRON	CONC	PCR 400/R/C/W/T
2	滑行道之寬度，鋪面類型及強度 Taxiway width, surface and strength	名稱 Designator	寬度 Width	鋪面 Surface
		A	33 M	ASPH
		B	33 M	ASPH
				強度 Strength
				PCR 290/F/C/X/T
				PCR 320/F/C/X/T

		名稱 Designator	寬度 Width	鋪面 Surface	強度 Strength
		C	33 M	ASPH	PCR 350/F/C/X/T
		D	33 M	ASPH	PCR 310/F/C/X/T
		N	23 M	ASPH	PCR 350/F/C/X/T
3	高度表校正地點及標高 Altimeter checkpoint location and elevation	Location: at Apron Elevation: 27FT			
4	VOR 校對點 VOR checkpoints	VOR: NIL			
5	INS 校對點 INS checkpoints	停機位編號 Bay Number	經緯度 Coordinates		最大機型 MAX ACFT Type
		1	242608.87N 1182210.37E		B757
		2	242608.14N 1182209.05E		A320/A321
		3	242607.49N 1182207.55E		A320/A321
		4	242606.67N 1182206.20E		A320/A321
		5	242605.97N 1182205.01E		ATR72
		6	242605.41N 1182203.91E		ATR72
		7	242604.58N 1182202.94E		ATR72
		8	242602.42N 1182158.43E		A320/A321
		9	242601.85N 1182156.89E		A320/A321
		10	242601.01N 1182155.35E		B757
6	備註 Remarks	NIL			

RCBS AD 2.9 地面活動導引、管制系統及標線

RCBS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	停機位編號指示牌，滑行引導線，目視 停靠導引系統 Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs at all intersections of TWY and holding positions. Guide lines at apron.
---	---	---

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
24	243.40	3004 x 45	RWY: see ADC SWY: NIL	242602.40N 1182219.70E 242518.70N 1182044.40E GUND: NIL	THR: 18 FT TDZ: 28 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
06	-0.33%	NIL	NIL	3124 x 300	90 x 90
24	+0.33%	NIL	NIL	3124 x 300	90 x 90
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
06	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
24	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCBS AD 2.13 公布距離
RCBS AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
06	2524	2524	2524	2524	THR displaced by 480 M
24	3004	3004	3004	3004	NIL

交叉口起飛 INTERSECTION TAKE-OFF					
跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
06	D	1601	1601	1601	NIL
24	B	2577	2577	2577	NIL
	C	1865	1865	1865	NIL

RCBS AD 2.14 進場及跑道燈光設備

RCBS AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
06	SSALR 720 M LIH	Green WBAR	PAPI RIGHT/3° (63 FT)	NIL	NIL	3004M, 60M, RED/WHITE/ YELLOW LIH	Red, No WBAR	NIL
24	MALSF 420M LIM	Green No WBAR	NIL	NIL	NIL	3004M, 60M, WHITE/ YELLOW LIH	Red, No WBAR	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
06	1. 06跑道邊燈: 前480M紅色, 1924M白色, 最後600M黃色。 2. SSALR: 簡易式高亮度進場燈光系統, 配有跑道對正指示燈, 屬FAA規範。 1. RWY 06 Edge LGT: first 480M red, 1924M white, last 600M yellow. 2. SSALR: Simplified short approach light system with runway alignment indicator lights, FAA standard.							

跑道名稱 RWY Designator	備註 Remarks
1	10
24	1. 24跑道邊燈: 前2404M白色, 最後600M黃色。 2. MALSF: 中亮度進場燈光系統, 配有順序閃光燈, 屬FAA規範。 1. RWY 24 Edge LGT: first 2404M white; last 600M yellow. 2. MALSF: Medium intensity approach lighting system with sequenced flashers, FAA standard.

RCBS AD 2.15 其他燈光設備及備用電源

RCBS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置, 特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: On top of the tower. White/Green, every 5 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light: blue, RWY guard lights.
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Generator power supply/15sec.
5	備註 Remarks	NIL

RCBS AD 2.16 直昇機降落區

RCBS AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL

7	備註 Remarks	NIL
---	---------------	-----

RCBS AD 2.17 飛航服務空域
RCBS AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	金門機場 KINMEN AERODROME
2	空域上下限 Vertical limits	3000FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Kinmen Class D Airspace.
4	航管單位呼號 使用語言 ATS unit call sign Language(s)	KINMEN TOWER Chinese, English
5	轉換飛行高度 Transition altitude	11000FT
6	備註 Remarks	1. 高雄近場管制塔臺負責此空域內所有儀器飛航之管制。 2. 於目視天氣情況時，金門塔臺負責機場航線上航空器活動之管制。 3. 固定翼航空器不得實施特種目視飛航。 4. 金門機場使用東航線。 1. ATC service is provided to all IFR aircraft in this area by Kaohsiung Approach. 2. KINMEN TOWER provides services to aircraft within the aerodrome traffic pattern under VMC. 3. Special VFR operation is prohibited for fix-wing aircraft. 4. East traffic pattern is used for KINMEN AERODROME.

RCBS AD 2.18 飛航服務無線電通訊設施
RCBS AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
ATIS	KINMEN AIRPORT	127.20 MHZ	2300-1230 (UTC)	NIL
TWR	KINMEN TOWER	118.00 MHZ	2300-1230 (UTC)	NIL
		121.50 MHZ		NIL
		126.20 MHZ		NIL
		236.60 MHZ		NIL
		243.00 MHZ		NIL

10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL
----	--	-----

RCCM AD 2.12 跑道場面特性

RCCM AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
02	019.04	783 x 23	RWY: PCR 200/R/D/W/T CONC SWY: NIL	231235.10N 1192458.70E 231259.17N 1192507.67E GUND: 58 FT	THR: 53 FT TDZ: NIL
20	199.04	783 x 23	RWY: PCR 200/R/D/W/T CONC SWY: NIL	231259.17N 1192507.67E 231235.10N 1192458.70E GUND: 58 FT	THR: 49 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
02	NIL	NIL	30 x 40	843 x 60	NIL
20	NIL	NIL	30 x 40	843 x 60	NIL
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
02	NIL	NIL	NIL		
20	NIL	NIL	NIL		

RCCM AD 2.13 公布距離

RCCM AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
02	783	813	783	783	NIL

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
20	783	813	783	783	NIL

RCCM AD 2.14 進場及跑道燈光設備

RCCM AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
02	RTIL Uni-dir. Flash FREQ 120/MIN	Green No WBAR	APAPI LEFT/3° (40 FT)	NIL	NIL	783M, 60M, White, Yellow, LIH	Red No WBAR	NIL
20	RTIL Uni-dir. Flash FREQ 120/MIN	Green No WBAR	APAPI LEFT/3° (39 FT)	NIL	NIL	783M, 60M, White, Yellow, LIH	Red No WBAR	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
02	APAPI不具備光強度控制裝置，不符ANNEX14之規定。 The APAPI does not provide suitable intensity control as required by Annex 14.							
20	APAPI不具備光強度控制裝置，不符ANNEX14之規定。 The APAPI does not provide suitable intensity control as required by Annex 14.							

RCCM AD 2.15 其他燈光設備及備用電源

RCCM AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置，特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: on top of the terminal. White/Green every 5 sec. For rescue use at night only.
---	--	--

RCDC AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
09	088.00	2386 x 45	RWY: PCN 78/R/C/W/T CONC SWY: NIL	224019.84N 1202700.38E 224022.78N 1202823.95E GUND: NIL	THR: 76 FT TDZ: NIL
27	268.00	2386 x 45	RWY: PCN 78/R/C/W/T CONC SWY: NIL	224022.78N 1202823.95E 224019.84N 1202700.38E GUND: NIL	THR: 78 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
09	NIL	NIL	NIL	NIL	NIL
27	NIL	NIL	NIL	NIL	NIL
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
09	THR 2400 M MA_1A_HOOK_CA- BLE ELEV 81 FT	NIL	09跑道供降落使用。 RWY 09 is used for landing.		
27	NIL	NIL	27跑道供起飛使用。 RWY 27 is used for take-off.		

RCDC AD 2.13 公布距離

RCDC AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
09	NIL	NIL	NIL	NIL	NIL
27	NIL	NIL	NIL	NIL	NIL

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6

RCDC AD 2.14 進場及跑道燈光設備

RCDC AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
09	ALS	Green	NIL	NIL	NIL	White	Red	NIL
27	ALS	Green	NIL	NIL	NIL	White	Red	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
09	NIL							
27	NIL							

RCDC AD 2.15 其他燈光設備及備用電源

RCDC AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green, every 10 sec. HN or IMC.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: South of guard room
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	1. 所有滑行道轉彎處設有滑行道邊緣標記/滑行道邊燈。 2. 跑道之各出口滑行道：跑道警戒燈。 1. All taxiway curve area with taxiway edge marker/lights. 2. All taxiway exits associated with runway: RWY guard light.

RCFG AD 2.1 機場航用地名及名稱

RCFG AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RCFG - 馬祖/南竿 MATSU/NANGAN

RCFG AD 2.2 機場地理與管理資料

RCFG AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	機場之參考點 位置 ARP coordinates and site at AD	260935N 1195730E CENTER POINT of RWY 03/21
2	與城市之距離方向 Direction and distance from (city)	NIL
3	機場標高/參考溫度 Elevation/Reference temperature	232 FT / 31° C
4	機場標高位置之大地基準面起伏 Geoid undulation at AD ELEV PSN	45 FT
5	磁差/每年改變率 MAG VAR/Annual change	5° W (2026)/0.03° W
6	機場管理單位，郵寄地址，電話號碼， 傳真，電傳，航空固定通信服務地址代 字 AD Administration, address, tele- phone, telefax, telex, AFS	馬祖航空站 MATSU AIRPORT OFFICE 連江縣南竿鄉復興村220號 NO.220, FUSING VILLAGE, NANGAN TOWNSHIP, LIENCHIANG COUNTY 209, TAIWAN, R.O.C. Tel: 886-836-26501 Fax: 886-836-26504
7	許可飛航類別 (IFR/VFR) Types of traffic permitted (IFR/VFR)	VFR
8	備註 Remarks	Types of traffic permitted: IFR ON CONDITION

RCFG AD 2.3 作業時間

RCFG AD 2.3 OPERATIONAL HOURS

1	機場管理單位 AD Administration	2300-1100 (UTC)
2	海關及證照查驗 Customs and immigration	NIL
3	衛生及檢疫 Health and sanitation	NIL
4	飛航諮詢 AIS Briefing Office	NIL
5	飛航計畫服務 ATS Reporting Office (ARO)	NIL
6	氣象諮詢 MET Briefing Office	From MAR to JUN: 2030-1100 (UTC) From JUL to FEB: 2100-1100 (UTC)
7	飛航服務 ATS	2230-1030 (UTC)
8	航空燃油加油服務 Fuelling	NIL
9	機場勤務 Handling	2300-0930 (UTC)

10	安檢單位 Security	2300-1000 (UTC)
11	除冰服務 De-icing	NIL
12	備註 Remarks	氣象諮詢與飛航服務將視航情需要，彈性增加服務時間。 MET Briefing Office/ATS operational hours will be lengthened to meet operations.

RCFG AD 2.4 裝卸服務與設備

RCFG AD 2.4 HANDLING SERVICES AND FACILITIES

1	貨物裝卸設備 Cargo-handling facilities	NIL
2	燃油/滑油型式 Fuel/oil types	NIL
3	加油設備/能力 Fuelling facilities/capacity	NIL
4	除冰設備 De-icing facilities	NIL
5	來機可用之廠棚 Hangar space for visiting aircraft	NIL
6	來機之修護裝備 Repair facilities for visiting aircraft	NIL
7	備註 Remarks	NIL

RCFG AD 2.5 商旅服務

RCFG AD 2.5 PASSENGER FACILITIES

1	住宿設備 Hotels	Hotels near the airport.
2	膳食供應 Restaurants	Restaurants near the airport.
3	聯外交通 Transportation	Taxis, Buses
4	醫療設備 Medical facilities	Hospitals in downtown, Military hospital Nr.821
5	銀行及郵局 Bank and Post Office	ATM
6	旅客服務中心 Tourist Office	NIL
7	備註 Remarks	NIL

RCFG AD 2.6 救援與消防設備

RCFG AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	機場消防等級 AD category for fire fighting	CAT 5
2	救援裝備 Rescue equipment	3000 gallon foam fire engine x 1 and 1500 gallon foam fire engine x 1, equipped in accordance with CAT 5.

5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL, C (Charts, abbreviated plain language text) Chinese; English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx chart, SIGWX PROG CHART, Upper Level Wx chart
8	輔助裝備 Supplementary equipment available for providing information	1. 氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw) 2. 牛角嶺風向風速計請參閱RCFG AD 2.22 Wind sensors at Niujiaoling: refer to RCFG AD 2.22
9	收受氣象資料之飛航服務單位 ATS units provided with information	南竿機場管制臺, 臺北近場管制塔臺 Nangan TWR, Taipei APP
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCFG AD 2.12 跑道場面特性

RCFG AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
03	026.29	1579 x 30	RWY: PCR 240/R/B/W/T CONC Grooved SWY: NIL	260912.20N 1195717.89E 260958.20N 1195743.05E GUND: 45 FT	THR: 221 FT TDZ: NIL
21	206.30	1579 x 30	RWY: PCR 240/R/B/W/T CONC Grooved SWY: NIL	260958.20N 1195743.05E 260912.20N 1195717.89E GUND: 45 FT	THR: 218 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
03	NIL	NIL	NIL	1700 x 90	NIL
21	NIL	NIL	NIL	1700 x 90	NIL

跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks
1	12	13	14
03	NIL	NIL	NIL
21	NIL	NIL	NIL

RCFG AD 2.13 公布距離

RCFG AD 2.13 DECLARED DISTANCES


跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
03	1459	1639	1459	1459	囿於 RESA 所需土地無法取得，以公布 TORA/ASDA/LDA 距離方式將部分跑道視為跑道末端之 RESA。 In the absence of land, TORA/ASDA/LDA are declared to reclaim a portion of RWY for use as over-run RESA.
21	1459	1639	1459	1459	囿於 RESA 所需土地無法取得，以公布 TORA/ASDA/LDA 距離方式將部分跑道視為跑道末端之 RESA。 In the absence of land, TORA/ASDA/LDA are declared to reclaim a portion of RWY for use as over-run RESA.

機場圖
AERODROME CHART

ELEV 232FT ARP:260935N 1195730E

南竿機場
NANGAN AD

CHANGES: MAG VAR ANNUAL CHANGE; RTIL SYMBOL

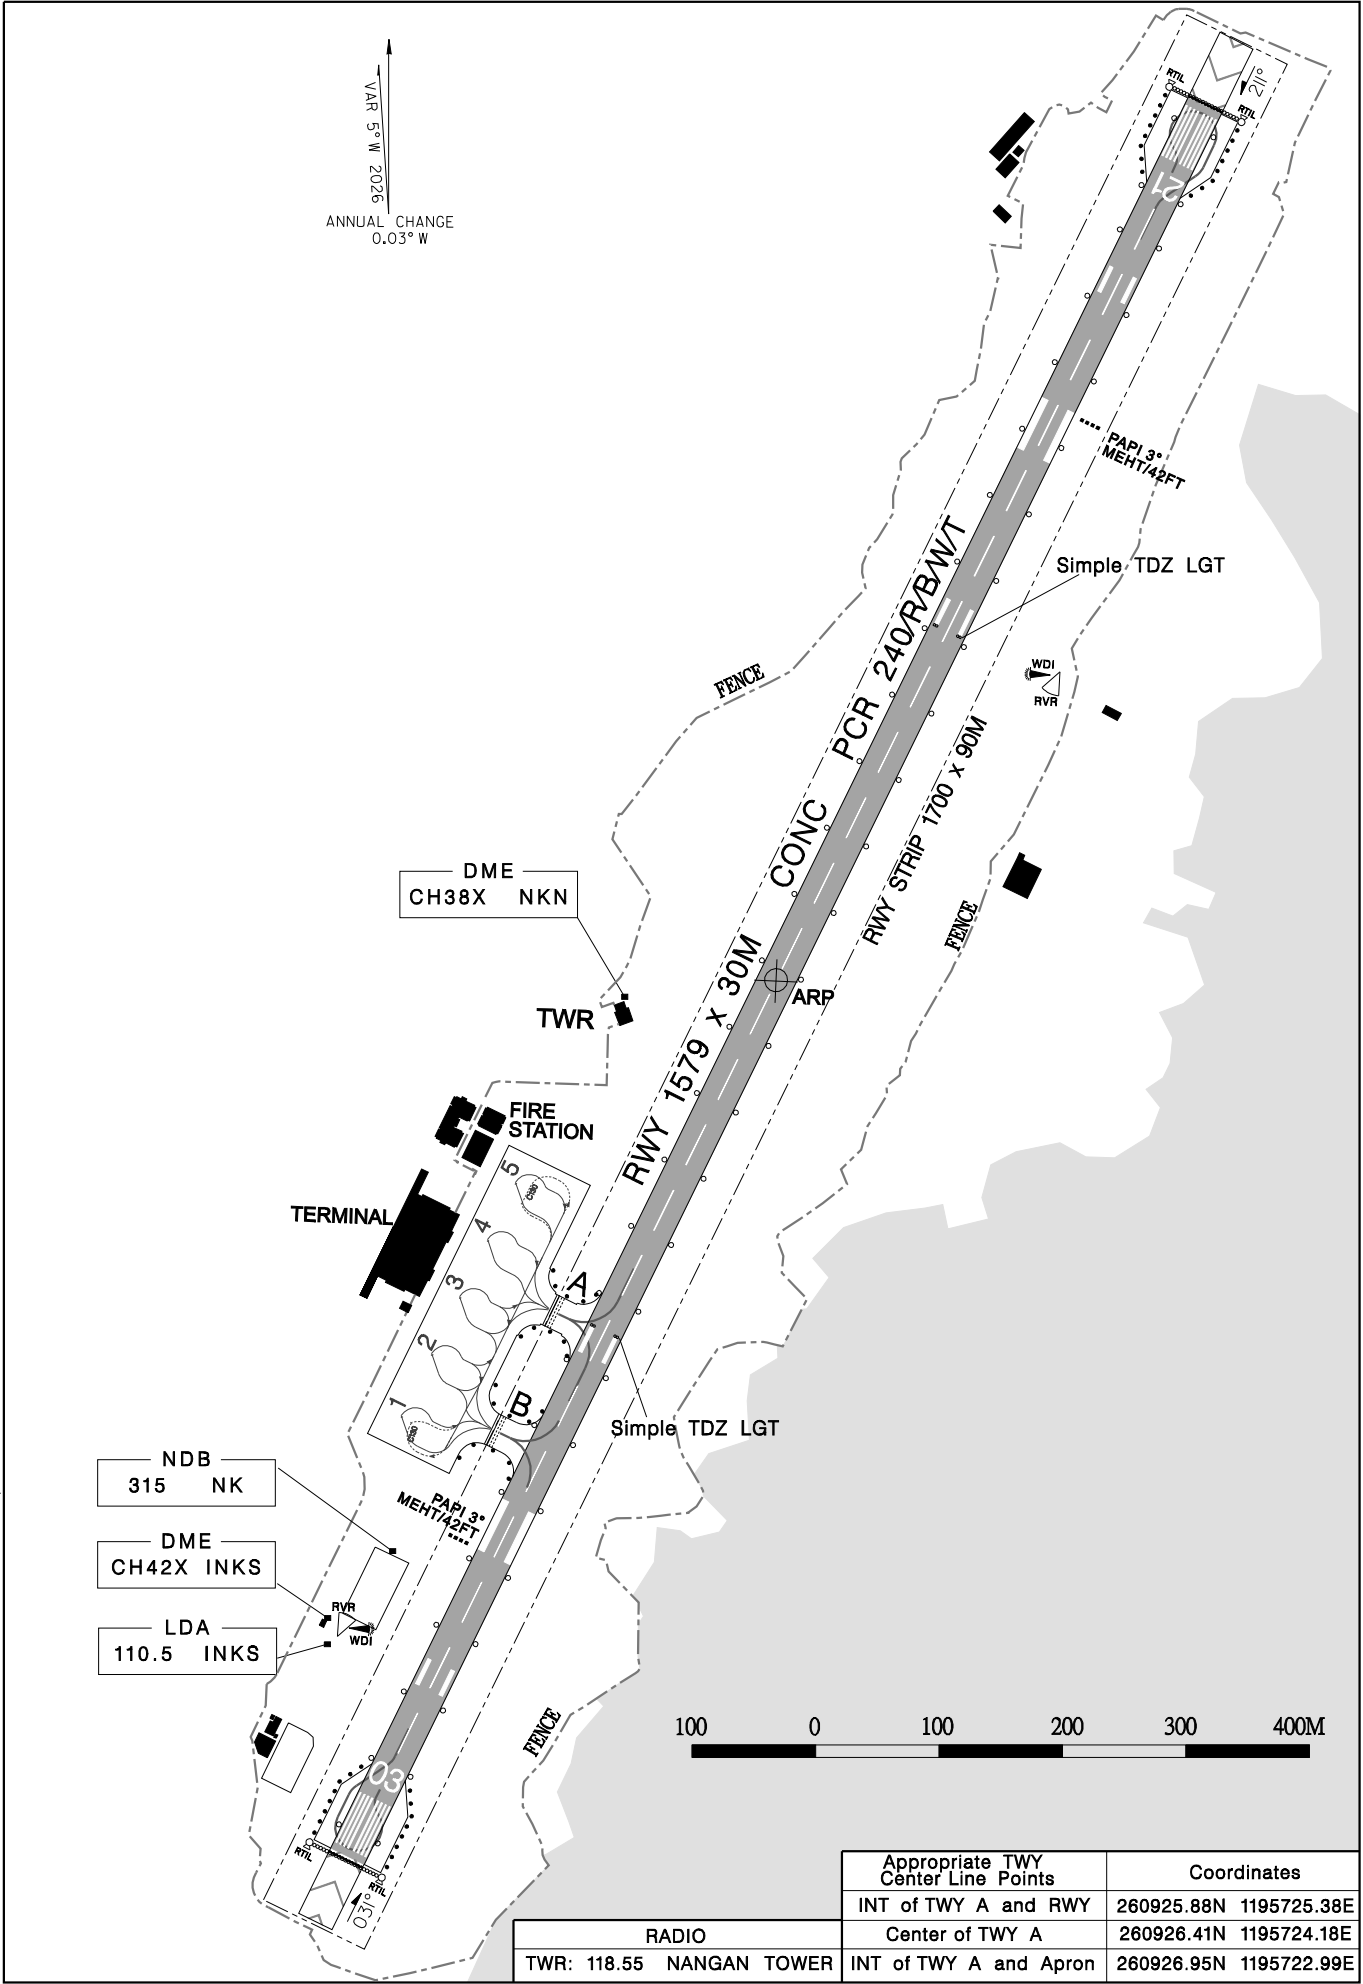

THIS PAGE
INTENTIONALLY
LEFT BLANK

RCFN AD 2.13 公布距離
RCFN AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
04	2438	2438	2438	2438	NIL
22	2438	2438	2438	2438	NIL

交叉口起飛
INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
04	B	1687	1687	1687	NIL
22	C	1650	1650	1650	NIL
	C2	1835	1835	1835	NIL

RCFN AD 2.14 進場及跑道燈光設備
RCFN AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Designator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有無翼排燈 THR LGT colour WBAR	目視進場滑降指示燈 (最低眼高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長度、間距、 顏色、強度 RWY Centre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末端燈顏色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
04	MALSR 720 M LIM	Green WBAR	PAPI LEFT/3° (54.6 FT)	NIL	NIL	2438M, 60M White/Yellow, LIH	Red No WBAR	NIL
22	RTIL ALS 210M	Green No WBAR	PAPI LEFT/3° (50.1 FT)	NIL	NIL	2438M, 60M White/Yellow, LIH	Red No WBAR	NIL
跑道名稱 RWY Designator	備註 Remarks							
1	10							
04	MALSR：中亮度進場燈光系統，配有跑道對正指示燈，屬FAA規範。 MALSR is FAA standard equipped with RAI.							
22	NIL							

RCFN AD 2.15 其他燈光設備及備用電源

RCFN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green, every 5 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: One each at the left side of RWY, 196M and 158M from RCL respectively. Lighted.
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light: Blue RWY guard lights
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Secondary power supply/15 sec.
5	備註 Remarks	NIL

RCFN AD 2.16 直昇機降落區

RCFN AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	NIL

RCFN AD 2.17 飛航服務空域

RCFN AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	臺東 / 豐年機場 TAITUNG/FONGNIAN AERODROME
2	空域上下限 Vertical limits	2500FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Taitung Class D Airspace

5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL, C (Charts, abbreviated plain language text) Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx Chart, SigWx Prog Chart and Upper Level Wx Chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	綠島機場管制臺, 高雄近場管制塔臺 Ludao TWR, Kaohsiung APP
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCGI AD 2.12 跑道場面特性

RCGI AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
17	164.18	917 x 23	RWY: PCR 30/F/B/ X/U - Composite CONC+ASPH SWY: NIL	224037.98N 1212753.97E 224009.27N 1212802.63E GUND: NIL	THR: 28 FT TDZ: NIL
35	344.18	917 x 23	RWY: PCR 30/F/B/ X/U - Composite CONC+ASPH SWY: NIL	224009.27N 1212802.63E 224037.98N 1212753.97E GUND: NIL	THR: 27 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
17	NIL	NIL	NIL	1037 x 40	NIL
35	NIL	NIL	NIL	1037 x 40	NIL

跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks
1	12	13	14
17	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.
35	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.

RCGI AD 2.13 公布距離
RCGI AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
17	917	917	917	917	NIL
35	917	917	917	917	NIL

RCGI AD 2.14 進場及跑道燈光設備
RCGI AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des- ignator	進場燈 型式、長 度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
17	RTIL Omni-di- rectional Flash FREQ 60/MIN	Green No WBAR	APAPI LEFT/3° (28 FT)	NIL	NIL	917M, 60M, White, Yellow, LIH	Red No WBAR	NIL

5	銀行及郵局 Bank and Post Office	Banks at international passenger terminal. ATM available at both domestic and international passenger terminals. Post office at international passenger terminal.
6	旅客服務中心 Tourist Office	Information counters at the arrival lobby of both domestic and international terminal on the 1st floor.
7	備註 Remarks	NIL

RCKH AD 2.6 救援與消防設備

RCKH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	機場消防等級 AD category for fire fighting	CAT 9
2	救援裝備 Rescue equipment	3000 gallon foam fire engines x 4, equipped in accordance with CAT 9.
3	故障航空器之移離能力 Capability for removal of disabled aircraft	Air bag x 1 set, hoisting belt x 1 set, metal plate x 290, timber x 194, steel, cable x 5. The largest type of aircraft the AD equipped to remove is B747.
4	備註 Remarks	無跑道鋪設泡沫之設施 No facilities for foaming of runways

RCKH AD 2.7 可用季節-清除設備

RCKH AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	清除設備類型 Types of clearing equipment	NIL
2	清除優先順序 Clearance priorities	NIL
3	備註 Remarks	NIL

RCKH AD 2.8 停機坪、滑行道及核驗點位置

RCKH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	停機坪之鋪面與強度 Apron surface and strength	名稱 Designator	鋪面 Surface	強度 Strength
		CARGO (Stand 33-36)	CONC	PCR 710/R/B/W/U
		MAINTENANCE (Stand D1-D3)	CONC	PCR 710/R/B/W/U
		Stand 3-8	CONC	PCR 960/R/C/W/T
		Stand 11-18	CONC	PCR 750/R/C/W/T
		Stand 21-23	CONC	PCR 1130/R/C/W/T
		Stand 24-29	CONC	PCR 780/R/C/W/T
		Stand 30-32	CONC	PCR 1130/R/C/W/T
		Stand 511-512	CONC	PCR 1280/R/B/W/T
		Stand 516	CONC	PCR 1280/R/B/W/T
		Stand 522-528	CONC	PCR 1230/R/B/W/T

2	滑行道之寬度、鋪面類型及強度 Taxiway width, surface and strength	名稱 Designator	寬度 Width	鋪面 Surface	強度 Strength
		A	30 M	CONC + ASPH	PCR 1220/R/C/W/T - COMPOSITE
		B	30 M	CONC	PCR 1090/R/B/W/T
		C	35 M	CONC + ASPH	PCR 650/R/C/W/T - COMPOSITE
		D	30 M	CONC	PCR 1180/R/B/W/T
		E	35 M	CONC + ASPH	PCR 750/R/C/W/T - COMPOSITE
		F	30 M	CONC	PCR 1180/R/B/W/T
		G	35 M	CONC + ASPH	PCR 1060/R/C/W/T - COMPOSITE
		H	30 M	CONC + ASPH	PCR 1041/R/C/W/U - COMPOSITE
		J	35 M	CONC + ASPH	PCR 1810/R/C/W/T - COMPOSITE
		L	30 M	CONC + ASPH	PCR 1220/R/C/W/T - COMPOSIT
		S	30 M	CONC + ASPH	PCR 890/F/C/X/T - COMPOSITE
		S3	30 M	CONC	PCR 1050/R/B/W/T
		S4	35 M	CONC	PCR 1041/R/C/W/U
		Taxilane K1	30 M	CONC	PCR 1130/R/C/W/T
		Taxilane K2	30 M	CONC	PCR 780/R/C/W/T
		Taxilane K3	30 M	CONC	PCR 1130/R/C/W/T
		Taxilane K4	30 M	CONC	PCR 1130/R/C/W/T
3	高度表校正地點及標高 Altimeter checkpoint location and elevation	Location: at Apron Elevation: 19FT			
4	VOR 校對點 VOR checkpoints	VOR: NIL			
5	INS 校對點 INS checkpoints	停機位編號 Bay Number	經緯度 Coordinates		最大機型 MAX ACFT Type
		D1	223423.61N 1202013.10E		B738
		D2	223423.66N 1202011.56E		B738
		D3	223423.71N 1202009.71E		B763
		3	223425.42N 1202049.64E		B752
		4	223423.84N 1202049.58E		A321
		5	223423.26N 1202043.58E		A321NEO
		6	223423.31N 1202041.77E		A321NEO

停機位編號 Bay Number	經緯度 Coordinates	最大機型 MAX ACFT Type
7	223423.37N 1202039.96E	A321NEO
8	223423.42N 1202038.15E	A321NEO
11	223417.05N 1202046.72E	E190
12	223416.84N 1202045.34E	A321
13	223416.89N 1202043.94E	A321
14	223416.94N 1202042.54E	A321
15	223416.99N 1202040.96E	A321
16	223417.04N 1202039.39E	B752
17	223417.08N 1202037.57E	B752
18	223417.14N 1202035.74E	B752
21	223423.69N 1202031.62E	A321
22	223421.52N 1202031.61E	B777-300ER
23	223419.14N 1202031.52E	B777-300ER
24	223423.58N 1202029.44E	B763
25	223421.67N 1202029.38E	B763
26	223419.78N 1202029.00E	B738
27	223423.79N 1202022.38E	A321
28	223421.89N 1202022.32E	A321
29	223419.99N 1202022.41E	B738
30	223424.03N 1202020.08E	B763
31	223421.88N 1202019.94E	B777-300ER
32	223419.51N 1202019.85E	B777-300ER
33	223426.03N 1202057.87E	B748

		停機位編號 Bay Number	經緯度 Coordinates	最大機型 MAX ACFT Type
		34	223426.12N 1202055.07E	B748
		35	223426.21N 1202052.27E	B748
		36	223427.83N 1202050.33E	A321
		511	223429.89N 1202042.52E	B777-300ER
		512	223429.78N 1202039.72E	B772
		516	223430.30N 1202031.48E	B777-300ER
		522	223430.39N 1202023.10E	B772
		523	223430.34N 1202021.12E	A321
		524	223430.38N 1202019.60E	A321
		525	223430.44N 1202017.67E	A321
		526	223430.49N 1202016.15E	A321
		527	223430.53N 1202014.63E	A321
		528	223430.89N 1202013.12E	B738
6	備註 Remarks	TXL K4: for ACFT wingspan up to 36M.		

RCKH AD 2.9 地面活動導引、管制系統及標線

RCKH AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	停機位編號指示牌，滑行引導線，目視 停靠導引系統 Use of aircraft stand ID signs, TWY guide lines and visual docking/park- ing guidance system of aircraft stands	Aircraft stand identification signs, guide lines at apron, taxiing guidance signs at all intersections of TWY/RWY and at all hold- ing positions.
2	跑道、滑行道標線及燈光 RWY and TWY markings and LGT	RWY: Designation, THR, TDZ, RWY distance remaining sign and center line, edge and RWY end as appropriate, marked and lighted. TWY: Holding positions at all TWY/RWY intersections, marked and lighted; center lines.
3	停止線燈 Stop bars	Stop bar: NIL RWY guard LGT: RWY-HLDG position.
4	備註 Remarks	NIL

RCKH AD 2.12 跑道場面特性
RCKH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
09	091.90	3150 x 60	RWY: PCR 1180/R/A/W/T CONC+ASPH SWY: ASPH	223438.97N 1202011.10E 223435.74N 1202155.76E GUND: NIL	THR: 21 FT TDZ: 25 FT
27	271.93	3150 x 60	RWY: PCR 1180/R/A/W/T CONC+ASPH SWY: NIL	223436.22N 1202140.18E 223439.14N 1202005.55E GUND: NIL	THR: 31 FT TDZ: 31 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
09	+0.1%	60 x 60	60 x 150	3330 x 252	160 x 150
27	-0.1%	NIL	60 x 150	3330 x 252	160 x 150
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
09	NIL	Available	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
27	NIL	Available	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCKH AD 2.13 公布距離

RCKH AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
09	3150	3210	3210	2990	THR displaced by 160 M
27	3150	3210	3150	2705	THR displaced by 445 M

交叉口起飛

INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
09	B	3056	3116	3116	NIL
	C	2495	2555	2555	NIL
	E	1690	1750	1750	NIL
27	E	1470	1530	1470	NIL
	F	2495	2555	2495	NIL
	H	3015	3075	3015	NIL

RCKH AD 2.14 進場及跑道燈光設備

RCKH AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
09	MALSR 720 M LIM	Green WBAR	PAPI LEFT/3° (59.9 FT)	White, 900M	3150M, 15M, White, White/ Red, Red, LIH	3150M, 60M, Red, White, Yellow, LIH.	Red No WBAR	60M Red
27	CAT1 720M LIH	Green WBAR	PAPI RIGHT/3° (62.3 FT)	NIL	3150M, 15M, White, White/ Red, Red, LIH	3150M, 60M, Red, White, Yellow, LIH	Red No WBAR	NIL

跑道名稱 RWY Designator	備註 Remarks
1	10
09	MALSR為中亮度進場燈光系統，配有跑道對正指示燈，屬FAA規範。 MALSR is FAA standard, equipped with RAI.
27	NIL

RCKH AD 2.15 其他燈光設備及備用電源

RCKH AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置，特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green every 5 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: Three set wind measuring systems: One at RWY 09 thresholds, 90M from runway center line. The other at the central part of runway, 90M from runway center line. The third at RWY 27 thresholds, 120M from runway center line.
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	Edge LGT: ALL TWY. Center line LGT: TWY A, B, C, D, E, F, G, H, J, L, S and S4
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Within 1 sec: REDL, RENL, RCLL, RTZL Within 15 sec: Other LGT
5	備註 Remarks	NIL

RCKH AD 2.16 直昇機降落區

RCKH AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	NIL

RCKH AD 2.17 飛航服務空域
RCKH AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	高雄國際機場 KAOHSIUNG INTERNATIONAL AERODROME
2	空域上下限 Vertical limits	2500FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Kaohsiung Class D Airspace.
4	航管單位呼號 使用語言 ATS unit call sign Language(s)	KAOHSIUNG TWR Chinese, English
5	轉換飛行高度 Transition altitude	11000FT
6	備註 Remarks	1. 高雄近場管制塔臺負責此空域內所有航空器之管制。 2. 於目視天氣情況時，高雄塔臺負責機場航線上航空器活動之管制。 3. 高雄機場使用南航線。 1. ATC services are provided to all aircraft by Kaohsiung Approach in this area. 2. Kaohsiung Tower provides services to aircraft within the aerodrome traffic pattern under VMC. 3. South traffic pattern is used for Kaohsiung Aerodrome.

RCKH AD 2.18 飛航服務無線電通訊設施
RCKH AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
APP	KAOHSIUNG APPROACH	121.10 MHZ	H24	NIL
		124.70 MHZ		NIL
		125.70 MHZ		備用頻率 alternate frequency
		228.40 MHZ		NIL
		232.20 MHZ		備用頻率 alternate frequency
		324.80 MHZ		NIL
		328.70 MHZ		備用頻率 alternate frequency
	KAOHSIUNG FLIGHT FOLLOW	119.50 MHZ		目視飛航通訊追蹤席 VFR Flight following
		135.80 MHZ		目視飛航通訊追蹤席 VFR Flight following
		329.50 MHZ		目視飛航通訊追蹤席 VFR Flight following

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
ATIS	KAOHSIUNG INTL AIRPORT	127.80 MHZ	2200-1600 (UTC)	Data-link D-ATIS AVBL.
EMERG	As appropriate	121.50 MHZ	H24	Emergency
		243.00 MHZ		Emergency
TWR	KAOHSIUNG TOWER	118.70 MHZ	2200-1600 (UTC)	NIL
		120.70 MHZ		備用頻率 alternate frequency
		236.60 MHZ		NIL
	KAOHSIUNG GROUND	121.80 MHZ		備用頻率 alternate frequency
		121.90 MHZ		NIL

RCKH AD 2.19 無線電助導航設施

RCKH AD 2.19 RADIO NAVIGATION AND LANDING AIDS

設施類別、磁 差、ILS/MLS類別 (VOR/ILS/ MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of op- eration	電臺發射 天線位置 Site of trans- mitting an- tenna co- ordinates	DME 天線標高 Elevation of DME transmit- ting antenna	備註 Remarks
1	2	3	4	5	6	7
LOC 09 ILS CAT I	IKHG	108.30 MHZ	H24	223435.4N 1202206.2E		前航道區角：3.7° 因受地形影響，航道中心 線左側26°以外，7NM以 外，2000FT以下，不可使 用。 Front course sector angle: 3.7° Due to terrain, beyond 26° left of course center- line, beyond 7NM, below 2000FT unusable.
GP 09 ILS CAT I		334.10 MHZ	H24	223441.8N 1202022.6E		滑降角3° Angle 3°, RDH 53FT

設施類別、磁差、ILS/MLS類別 (VOR/ILS/MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of operation	電臺發射 天線位置 Site of transmitting antenna coordinates	DME 天線標高 Elevation of DME transmitting antenna	備註 Remarks
1	2	3	4	5	6	7
DME 09 ILS CAT I	IKHG	(CH20X)	H24	223441.7N 1202022.6E	33 FT	與09跑道儀器降落系統滑降臺同址。 因受地形影響，航道中心線左側26°以外，7NM以外，2000FT以下，不可使用。 Co-located with RWY 09 ILS GP. Due to terrain, beyond 26° left of course centerline, beyond 7NM, below 2000FT unusable.
LOC 27 ILS CAT I	IKAS	109.70 MHZ	H24	223439.4N 1201957.4E		前航道區角：4.17° Front course sector angle: 4.17°
GP 27 ILS CAT I		333.20 MHZ	H24	223441.2N 1202128.6E		滑降角 3° Angle 3°, RDH 57FT
DME 27 ILS CAT I	IKAS	(CH34X)	H24	223441.1N 1202128.6E	43 FT	與27跑道儀器降落系統滑降臺同址。 Co-located with RWY 27 ILS GP.
VOR/DME (04° W)	HCN	113.70 MHZ (CH84X)	H24	215540.0N 1205036.9E	403 FT	VOR因地形關係，輻向322-342於40NM外，6000FT以下不能使用。 Due to terrain, VOR radial 322-342 beyond 40NM, below 6000FT unusable.
L	SK	330.00 KHZ	H24	223440.1N 1201934.9E		

RCKH AD 2.20 本場飛航規定 RCKH AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場管理單位指引

1. 航空器地面操作限制

- a. 航空器在停機坪(含連接停機坪之滑行道)因滑行錯誤，或已滑過指定之停機位，除經過機場管理單位允許外，禁止在原地180度迴轉，此時駕駛員應停車(或慢車)並告知塔臺須利用拖車，拖至所須之方向或指定之停放位置。
- b. 民用航空器(直昇機除外)在停機坪內，不得自行迴轉滑出停機坪至滑行道/滑行路徑。
- c. 航機滑行轉彎時應判斷採取過度轉向，以確保外側主輪軌跡與鋪面邊緣達到國際民航組織所建議之淨距。
- d. 由於機尾噴流可能影響相鄰機坪或棚廠，航空器於17號停機位後推時，機頭僅能朝西；12號停機位後推時機頭僅能朝東。
- e. A350-900、A350-1000、B787-10及B777-300ER在A或B滑行道可用時避開S4滑行道，以免損害其鋪面。

2. Boeing B747-800型機停機及滑程序

- a. 指定停機位33、34、35
 - i. 到場
09跑道-J滑行道-S滑行道-停機位
27跑道-A滑行道-S滑行道-停機位
 - ii. 離場
停機位-S滑行道-A滑行道-09跑道
停機位-S滑行道-J滑行道-27跑道
- b. 因S滑行道南側有障礙物，翼尖淨距減少至13.3M，故航機沿S滑行道滑行時，介於S4及A滑行道之間應減慢速度至10哩/小時，且鼻輪保持在滑行道中心線上。
- c. 航機沿著上述路徑滑行時，得視需要向塔臺請求引導車(FOLLOW ME)導引。

3. 因滑行道配置關係，有5個地點具潛在碰撞風險，請航空器注意，茲列出熱點(HOT SPOT)如下：

- a. 熱點1：在接近A、S3、L滑行道與K3滑行路徑交叉口時，駕駛員應保持警覺，避免發生衝突，以確保交通有序順暢。
- b. 熱點2：在接近L、S4滑行道與K4滑行路徑交叉口時，駕駛員請留意停機位511後推航機。

4. 航空器引擎交叉開車作業程序

- a. 禁止在停機位操作大油門輔助其他引擎開車。
- b. 需事先經航空站航務組許可。

2.20.1 AERODROME ADMINISTRATION GUIDELINES

1. Aircraft ground maneuvering restrictions

- a. Aircraft are not allowed to make a 180-degree turn without airport authority's approval when deviating or taxiing over the assigned parking bays. In this case, pilots should shut down or idle engines and inform tower for towing service.
- b. Civil aircraft (except helicopter) are not allowed to make turns with its own power when moving from apron to taxiway/taxilane.
- c. Aircraft shall perform judgmental oversteering while turning into (another) taxiway to meet ICAO minimum clearance distance requirement between the outer main wheel and the edge of the taxiway.
- d. Due to jet blast might affect adjacent apron or hangar, aircraft pushing back from Stand 17 shall face west and from Stand 12 shall face east.
- e. For A350-900, A350-1000, B787-10 and B777-300ER, if TWY A or B is available, aircraft should taxi via TWY A or B instead of TWY S4, to avoid damaging the pavement.

2. Parking and taxiing procedures for Boeing B747-800

- a. When Stand 33, 34, 35 are assigned:
 - i. Arrival
RWY 09 - TWY J - TWY S - Stand
RWY 27 - TWY A - TWY S - Stand
 - ii. Departure
Stand - TWY S - TWY A - RWY 09
Stand - TWY S - TWY J - RWY 27
- b. Aircraft taxiing along TWY S between TWY S4 and A shall reduce speed to 10 KT and maintain aircraft nose gear on taxiway centerline due to reduced wingtip clearance (13.3M) caused by obstacle on south side of TWY S.
- c. Aircraft taxiing along the above-mentioned path may request FOLLOW ME guidance from ATC if necessary.

3. Due to configurations of taxiways, there are 5 locations where potential risks of aircraft collision exist. These locations are listed below as Hot Spots, where heightened attentions by pilots is necessary.

- a. HOT SPOT 1: While approaching the intersection of TWY A, S3, L and TXL K3, pilots are to maintain a lookout to prevent conflicts and ensure an orderly traffic flow.

- c. 依塔臺指示，後推於下列滑行道/滑行路徑之中心線上操作：
- i. 11-18停機位：如表2-20-1所示。
 - ii. 其餘停機位：A滑行道、L滑行道或S滑行道

- b. HOT SPOT 2: While approaching the intersection of TWY L, S4 and TXL K4, pilots shall be aware of Stand 511 pushback operations.

4. Aircraft engine cross-bleed start-up procedure

- a. Using increased power to start other engines on stands is prohibited.
- b. Engine cross-bleed start-up approval must be obtained from Flight Operation Section of Airport Office in advance.
- c. Engine cross-bleed start-up can only be performed on the TWY/TXL centre-line according to ATC push-back instructions, details are as follows:
 - i. Stand 11-18: Refer to Table 2-20-1.
 - ii. Other stands: TWY A, TWY L or TWY S

表2-20-1

Table 2-20-1

停機位 Stand	機型 ACFT type
	A321
11-13	TXL K4 Face East
14	TWY A or L
15	TWY A or L
16-18	TXL K4 Face West

2.20.2 機場作業規定

2.20.2 AIRPORT REGULATIONS

1. 本場飛行限制

- a. 由高雄機場北邊目視進場至機場之航空器於加入09跑道5邊或27跑道3邊前，不得進入海岸線以內之空域。
- b. 當風速10KT以下時，得不使用與風向一致之跑道，航空器不能遵守此規定時，應告知航管單位。
- c. 高雄機場因地形障礙而為特殊機場。

1. Local flying restrictions

- a. Aircraft approaching from the north of airport shall not enter airspace east of coastline before joining the final of RWY 09 or the downwind of RWY 27 while executing a visual approach to Kaohsiung International Airport.
- b. The runway-in-use will not necessarily be aligned with the wind when wind velocity is 10 knots or less. Aircraft unable to comply with this restriction shall so advise ATC.
- c. Kaohsiung international airport is designated as a special airport due to terrain and obstacles.

2. 儀器飛航程序起飛天氣限度

2. IFR Take-off Weather Minimum

引擎數 ENG	RWY 09/27		
	REDL & RCLL & 2RVR	REDL & RCLL or REDL & RCL MARKING	NIL (DAY ONLY)
1	Visibility/RVR 350M	Visibility/RVR 500M	Visibility/RVR 1600M
2			Visibility/RVR 800M
3			

引擎數 ENG	RWY 09/27		
	REDL & RCLL & 2RVR	REDL & RCLL or REDL & RCL MARKING	NIL (DAY ONLY)
4			

2.20.3 航管許可、開車後推及滑行作業

高雄國際機場離場航機開車、後推及滑程序：
航空器自高雄國際機場離場航機必須遵守本開車、後推及滑程序。除非獲得航管許可，航機不得自行開車、後推或進行其他活動。

1. 航管許可

- 航機在開車前5分鐘，應呼叫 "高雄地面管制" 或經由資料鏈路，申請航管許可。
- 航機呼叫 "高雄地面管制" 申請許可時，必須說明自己之呼號，停機坪位置及申請之高度。
- 航管單位為安排適當之隔離，當離場航機申請之高度被過境班機佔用時，駕駛員必須選擇另一高度或延後起飛之時間。
- 除非航管許可已經有起飛時間之限制，航機在收到航管許可5分鐘內，必須準備好後推，否則航管許可可能將被取消。當航管許可被取消時，航管人員將告知駕駛員取消之原因。駕駛員在被取消航管許可後，必須按照前述開車程序，重新申請開車及航管許可。

2. 開車及後推

- 航機在收到航管許可後，向 "高雄地面管制" 申請開車及後推。
- 除非業經航管單位同意，航機在完成後推時應已準備好滑行，以減少整體作業之延誤。

3. 滑行

- 除非經航管單位同意，否則駕駛員不得自行利用跑道滑行。
- 當航管單位指定航空器起飛之跑道，並附加等待指示時，航管單位會先說明起飛跑道之號碼，於必要時頒發滑行指示，再說明等待指示。

2.20.3 ATC CLEARANCE, START-UP, PUSH BACK AND TAXIING

Start-up, push back, and taxiing procedures for aircraft departing from Kaohsiung International Airport:
Aircraft departing from Kaohsiung International Airport shall comply with the following start-up, push back, and taxiing procedures. Aircraft shall not commence start-up, push back or other movements unless they have been approved by ATC.

1. ATC Clearance

- Aircraft are to obtain ATC clearance via Datalink or by calling Kaohsiung Ground 5 minutes before start-up.
- Aircraft are to call Kaohsiung Ground, giving their call sign, parking bay number, and proposed flight level.
- An aircraft requesting an altitude occupied by an transit flight operating through the Taipei FIR may have to accept an alternate altitude or may have to delay its departure, in order for ATC to establish the prescribed separation.
- Unless a restriction on departure time has otherwise been specified, aircraft that is not ready to push back within 5 minutes of receiving an ATC clearance may have its clearance withdrawn. In such a situation, ATC will inform the aircraft of the clearance cancellation plus the reason. Following the cancellation of an ATC clearance, aircraft will follow the normal clearance request procedure as if it is the first time they were ready to depart.

2. Start-up and Push Back

- After receiving the ATC clearance, aircraft are to call Kaohsiung Ground for start-up and push back when ready.
- Unless otherwise approved by ATC, departing aircraft, at the end of push back, must have all engines started and be ready to taxi to reduce the overall delay of traffic.

3. Taxiing

- Unless otherwise approved by ATC, pilots shall not use runway for taxiing.
- When ATC assign aircraft a takeoff runway, with a hold short instruction. ATC shall specify the runway, issue taxi instructions if necessary, and then state the hold short instructions.

RCKH AD 2.21 降低噪音程序

RCKH AD 2.21 NOISE ABATEMENT PROCEDURES

為減少噪音來源與降低噪音衝擊:

- 宵禁時間：為防止噪音，除緊急情況外，每日16:01至22:30世界標準時間禁止起降。
- 訓練飛行
 - 外籍航空器不得於本場訓練飛行。
 - 本國籍航空器僅限於每日00:00-04:00及06:30-12:00世界標準時間實施訓練飛行，國定假日及例假日禁止實施。
- 由09跑道離場之航空器，起飛後未通過09跑道末端禁止右轉。
- 飛機停於貨運機坪應關閉APU，使用GPU電源。

To reduce noise at source and to lower impact to the neighborhood:

- Curfew period: Due to noise abatement, take-off or landing is prohibited during the period from 16:01 to 22:30UTC except emergency.
- Training flights
 - Foreign aircraft training is not allowed.
 - R.O.C aircraft training flights are only allowed to operate during 00:00-04:00 and 06:30-12:00UTC daily. Saturday, Sunday and holidays are excluded.
- Aircraft departing from RWY 09 shall not commence right turn until passing RWY end.
- Aircraft parking in cargo aprons shall turn off APU, use GPU instead.

RCKH AD 2.22 飛航程序

RCKH AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

等待點 Holding Fix	經緯度 Coordinates	等待點 Holding Fix	經緯度 Coordinates
FORKY	222553.84N 1202641.24E	OASIS	221652.19N 1201402.36E
KIZIN	223505.00N 1200533.00E	ORION	222309.77N 1200306.13E

註解: 其他資訊參照ENR 1.5.6及相關航圖。

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

Note: other information refer to ENR 1.5.6 and related charts.

2.22.2 目視飛航直昇機於高雄機場離場時之起飛方向及飛航路徑

- 起飛向西：沿跑道方向至海岸線後往目的地。
- 起飛向西轉北：由中山路轉國道1號。
- 起飛向西轉南：由2港口至海岸線往南。
- 起飛向東轉南：
 - 經鳳山水庫由鳳鼻頭往南。
 - 沿跑道方向至高屏溪往南。
- 起飛向東轉北：
 - 沿跑道方向至高屏溪往北。
 - 沿跑道方向爬高至1000FT，北向加入國道1號。

2.22.2 DIRECTIONS AND ROUTES FOR VFR HELICOPTERS DEPARTING FROM KAO-HSIUNG AD

- Westbound departing: After departure, fly along the runway direction till the coastline, then head for the destination.
- Westbound departing then turning northbound: After departure, fly along the Zhongshan Road, then join National Highway No. 1.
- Westbound departing then turning southbound: After departure, fly toward the Harbor No. 2 till the coastline, then turn southbound.
- Eastbound departing then turning southbound
 - After departure, fly toward the Fengshan Reservoir till the Fengbitou, then turn southbound.

b. After departure, fly along the runway direction till the Gaoping River, then turn southbound.

5. Eastbound departing then turning northbound

a. After departure, fly along the runway direction till the Gaoping River, then turn northbound.

b. After departure, fly along the runway direction and climb to 1000FT, then turn northbound to join National Highway No. 1.

2.22.3 目視飛航直昇機於高雄機場離到場飛航時之等待點與報告點

西子灣、衛武營、萬大橋、鳳山水庫、鳳鼻頭、雙園大橋。

2.22.4 低能見度作業程序

1. 第一階段低能見度作業 (RVR 低於750M)

a. 於 ATIS 廣播：「實施第一階段低能見度作業程序」(STAGE ONE LOW VISIBILITY PROCEDURES IN EFFECT)。

b. 航空器行經S滑行道位於A至S4滑行道間之各處交叉路口時，應主動向航管報告位置。

c. 航空器得視需要，請求引導車導引。

d. 當航空器飛航組員或車輛駕駛員報告迷失方向，且航管無法識別其所在位置時，所有航空器或車輛應原地等待，直至航空器或車輛位置可被航管識別為止。

e. 滑行路線(除航管另有指示外)：

i. 09跑道離場：依航管指示路線以全跑道起飛。

ii. 09跑道到場：於跑道末端脫離，並依航管指示路線至指定停機位。

iii. 27跑道離場：依航管指示路線以全跑道起飛。

2. 第二階段低能見度作業 (RVR 低於550M)，除第一階段作業外，另需：

a. 於 ATIS 廣播：「實施第二階段低能見度作業程序」(STAGE TWO LOW VISIBILITY PROCEDURES IN EFFECT)。

b. 為確保安全並避免跑道入侵，需對跑道和滑行道實施嚴格管制。

c. 以S4滑行道區隔東側及西側操作區，同一時間各只允許一架航空器活動。

2.22.3 VISUAL HOLDING AND REPORTING POINTS FOR VFR HELICOPTERS OPERATING AT KAOHSIUNG AD

XIZI BAY, WEIWUYING, WANDA BRIDGE, FENGSHAN RESERVOIR, FENGBITOU AND SHUANGYUAN BRIDGE.

2.22.4 LOW VISIBILITY PROCEDURES

1. Stage one Low Visibility Procedures (RVR is less than 750M)

a. ATIS broadcasts "STAGE ONE LOW VISIBILITY PROCEDURES IN EFFECT."

b. Aircraft shall proactively report their positions to ATC when passing each taxiway intersection on TWY S between TWY A and S4.

c. Aircraft may request follow-me vehicle guidance if necessary.

d. When the flight crew or vehicle driver become disoriented and ATC cannot identify the aircraft and vehicle's position either, all aircraft and vehicle shall hold position until their positions can be identified by ATC.

e. Taxi Routes (Unless otherwise instructed by ATC):

i. RWY 09 Departures: Departing aircraft shall follow ATC instructions for specific taxi route to use the full length of the runway for take-off.

ii. RWY 09 Arrivals: Arriving aircraft shall vacate at the runway end, then follow ATC instructions for specific taxi route to its assigned aircraft stand.

iii. RWY 27 Departures: Departing aircraft shall follow ATC instructions for specific taxi route to use the full length of the runway for take-off.

2. Stage two Low Visibility Procedures (RVR is less than 550M) In addition to Stage One procedures, the following shall apply:

a. ATIS broadcasts "STAGE TWO LOW VISIBILITY PROCEDURES IN EFFECT."

b. To prevent runway incursion and ensure safety, strict control is required in the maneuvering area.

c. At any given time, only one aircraft is permitted to operate in each maneuvering area separated by Taxiway S4.

RCKH AD 2.23 其他資訊

RCKH AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
麻雀 Eurasian Tree Sparrow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約22g，小型鳥種。 Around 22g weight, small sized species.
鴿子 Pigeon	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約315g，中型鳥種。 Around 315g weight, medium sized species.
紅鳩 Red Turtle Dove	全年 Whole year	09/27跑道北側草坪 North grass of RWY 09/27	GND-50FT	體重約106g，中型鳥種。 Around 106g weight, medium sized species.
斑頸鳩 Spotted Dove	全年 Whole year	09/27跑道北側草坪 North grass of RWY 09/27	GND-50FT	體重約154g，中型鳥種。 Around 154g weight, medium sized species.
白頭翁 Light-vented Bulbul	全年 Whole year	機場草坪 Grass area at the airport	GND-50FT	體重約39g，小型鳥種。 Around 39g weight, small sized species.
白尾八哥 Javan Myna	全年 Whole year	機場草坪 Grass area at the airport	GND-50FT	體重約86g，小型鳥種。 Around 86g weight, small sized species.
家燕 Barn Swallow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約15g，小型鳥種。 Around 15g weight, small sized species.
洋燕 Pacific Swallow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約16g，小型鳥種。 Around 16g weight, small sized species.
黃頭鷺 Cattle Egret	全年 Whole year	機場草坪 Grass area at the airport	GND-100FT	體重約368g，中型鳥種。 Around 368g weight, medium sized species
	每年8月至10月份，1300至夜間遷飛活動 From AUG to OCT, migration starts from 1300 to nighttime	27跑道東方約1.5KM處、27跑道東南方約4.6KM處 1.5KM east of RWY 27; 4.6KM south-east of RWY 27	GND-1200FT	

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
	每年2月至4月份 From FEB to APR	由機場27跑道東南方約4.6KM處(鳳山水庫)離開,沿09跑道西方高雄港外海北上飛行 Fly from Fengshan reservoir (4.6KM south-east of the airport) toward the outer sea of Kaohsiung Port	50FT-1200FT	
鸕鷀 Great Cormorant	每年11月至翌年4月份 From NOV to next APR	由09跑道西方高雄港外海飛行至機場東南方約4.6公里處(鳳山水庫) Fly from the outer sea of Kaohsiung Port toward Fengshan reservoir (south-east 4.6KM of the airport)	180FT-500FT	體重約2600至3700g, 大型鳥種。 Around 2600-3700g weight, large sized species.
	每年11月至翌年4月份 上午至黃昏 From NOV to next APR, Morning till sunset	27跑道東南方約4.6公里處(鳳山水庫)至水庫以東2公里處(高屏溪)、09跑道西方高雄港外海 Fly from Fengshan reservoir (4.6KM south-east of the airport), toward Gaoping River (2KM east of Fengshan reservoir) or toward the outer sea of Kaohsiung Port		
黑翅鳶 Black-shouldered Kite	全年,晨間、日間及黃昏 Whole year, in the dusk, daytime and dawn	跑道、滑行道、跑道北側草坪、機場草坪上空 RWYs, TWYs, north grass area of RWYs and grass area at the airport	GND-100FT	體重約180g-220g, 中型鳥種。 Around 180g-220g weight, medium sized species.
小白鷺 Little Egret	每年5月至10月份,日間 From MAY to OCT Daytime	機場草坪、割草作業處、積水處、機場北側排水溝 Grass area at the airport, grass cutting area, puddles, drains in north side of the airport	GND-1200FT	體重約180g-220g, 中型鳥種。 Around 180g-220g weight, medium sized species.

註解: 上表所列之時間係本地時間 (UTC+8), 另鳥類飛行高度, 係觀察鳥類活動所目測之概估值。

Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.


RCKH AD 2.24 本場航圖
RCKH AD 2.24 CHARTS RELATED TO AN AERODROME

CHANGES: NEW RAPIT EXIT TWY D, F INSTL; EXISTING TWY RE-DESIGNATED AS B, C, E, G, H, J; TWY CL LGT INSTL; HOT SPOT UPDATED; STANDS15 WITHDRAWN; NOTE DELETED.

機場圖
AERODROME CHART

AD ELEV 32FT ARP: 223437N 1202101E

高雄國際機場
KAOHSIUNG INTL AD

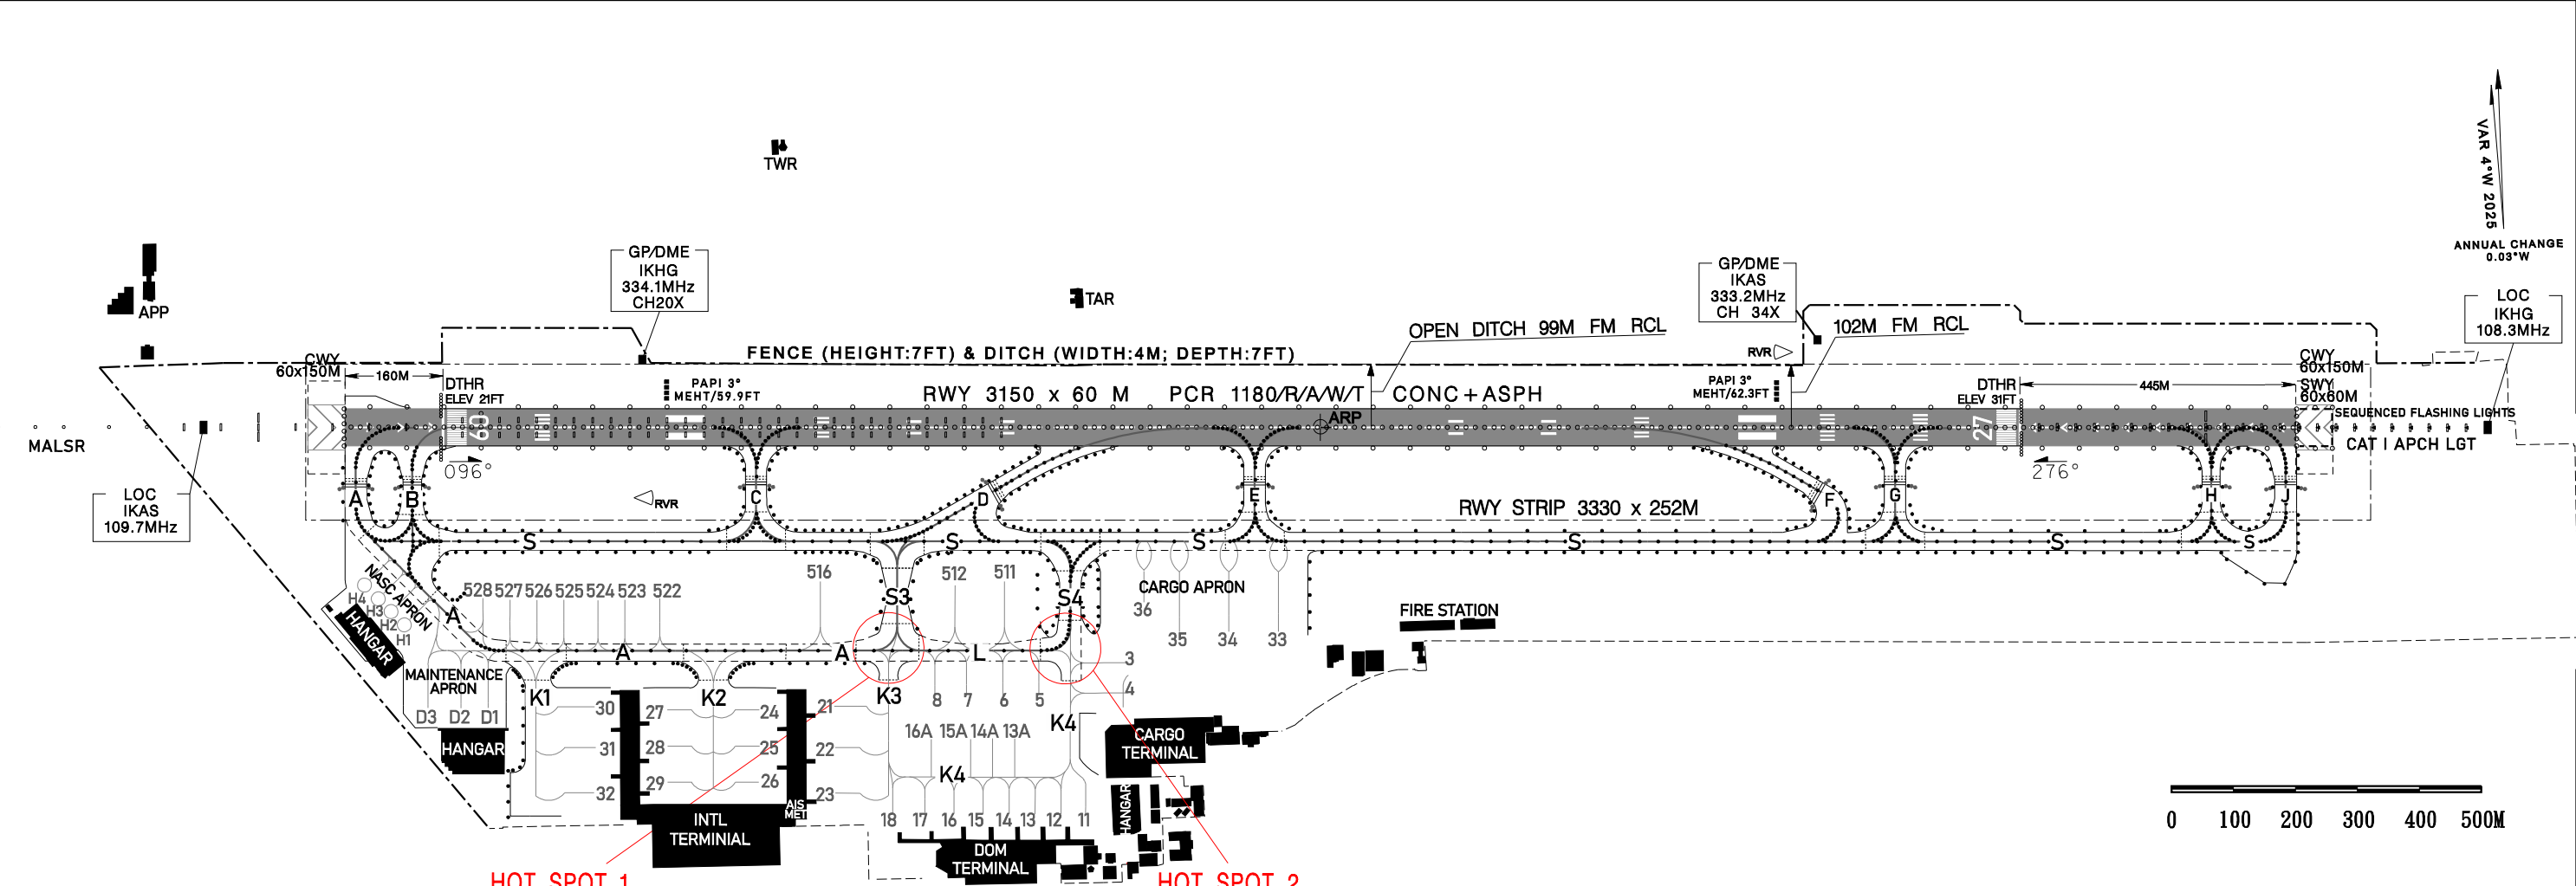

HOT SPOT 1

While approaching the intersection of TWY A, S3, L and TXL K3, pilots are to maintain a lookout to prevent conflicts and ensure an orderly traffic flow.

HOT SPOT 2

While approaching the intersection of TWY L, S4 and TXL K4, pilots shall be aware of Stand 511 pushback operations.

RWY	THR COORD	TDZ ELEV	RADIO	APRON	COORD of appropriate TWY center line points
09	223438.97N 1202011.10E	25FT	ATIS: 127.8 TWR: 118.7 121.5	Refer to AD 2.8 Table	Refer to table on verso of this chart
27	223436.22N 1202140.18E	31FT			

THIS PAGE
INTENTIONALLY
LEFT BLANK

Appropriate TWY Center Line Points	Coordinates
Intersection of TWY S and A	223433.15N 1202005.95E
Center of TWY S	223431.46N 1202100.44E
Intersection of TWY S3 and S	223432.19N 1202036.53E
Center of TWY S3	223429.32N 1202036.42E
Intersection of TWY S3 and A	223426.46N 1202036.32E
Intersection of TWY A and RWY	223439.12N 1202006.18E
Center of TWY A	223427.05N 1202016.93E
Intersection of TWY B and RWY	223437.92N 1202009.24E
Center of TWY B	223435.76N 1202009.24E
Intersection of TWY B and S	223433.60N 1202009.24E
Intersection of TWY C and RWY	223438.43N 1202028.78E
Center of TWY C	223432.09N 1202028.56E
Intersection of TWY C and A	223426.72N 1202028.37E
Intersection of TWY D and RWY	223436.85N 1202046.98E
Center of TWY D	223435.00N 1202043.00E
Intersection of TWY D and S	223432.48N 1202039.30E
Intersection of TWY E and RWY	223437.56N 1202056.95E
Center of TWY E	223434.09N 1202056.82E
Intersection of TWY E and S	223431.58N 1202056.73E
Intersection of TWY F and RWY	223435.43N 1202124.02E
Center of TWY F	223433.60N 1202126.30E
Intersection of TWY F and S	223431.37N 1202127.26E
Intersection of TWY G and RWY	223436.44N 1202133.11E
Center of TWY G	223432.97N 1202132.98E
Intersection of TWY G and S	223430.46N 1202132.89E
Intersection of TWY H and RWY	223435.89N 1202150.95E
Center of TWY H	223432.41N 1202150.83E
Intersection of TWY H and S	223429.90N 1202150.73E
Intersection of TWY J and RWY	223435.76N 1202155.14E
Center of TWY J	223432.28N 1202155.02E
Intersection of TWY J and S	223429.77N 1202154.93E
Intersection of TWY L and S3 and A	223426.46N 1202036.32E
Center of TWY L	223426.30N 1202041.22E
Intersection of TWY L and S4	223426.18N 1202046.12E
Intersection of TWY S4 and S	223431.90N 1202046.31E
Center of TWY S4	223429.07N 1202046.21E

THIS PAGE
INTENTIONALLY
LEFT BLANK

RCKU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	嘉義空軍基地 Chiayi Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	嘉義空軍基地 Chiayi Air Base H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Specific personnel briefing
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	Charts, abbreviated plain language text Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx Chart, Upper Level Wx Chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	嘉義塔臺 Chiayi TWR
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCKU AD 2.12 跑道場面特性

RCKU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
18	179.35	3050 x 45	RWY: PCR 520/R/C/W/T CONC SWY: NIL	232838.55N 1202325.38E 232659.33N 1202326.57E GUND: 68 FT	THR: 75 FT TDZ: 76 FT

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
36	359.35	3050 x 45	RWY: PCR 520/R/C/W/T CONC SWY: NIL	232659.33N 1202326.57E 232838.55N 1202325.38E GUND: 68 FT	THR: 85 FT TDZ: 85 FT
跑道名稱 Designations RWY	跑道及緩 衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
18	NIL	NIL	NIL	3170 x 300	240 x 90
36	NIL	NIL	NIL	3170 x 300	240 x 90
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
18	THR 3095 M 61QSII ELEV 98 FT THR 2589 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
36	THR 3088 M 61QSII ELEV 88 FT THR 2592 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCKU AD 2.13 公布距離

RCKU AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
18	3050	3050	3050	3050	NIL
36	3050	3050	3050	3050	NIL

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCKW AD 2.11 氣象資訊之提供

RCKW AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	恆春航空氣象臺 Hengchun Aeronautical Weather Station
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	0100-0900 (UTC) 恆春航空氣象臺 Hengchun Aeronautical Weather Station
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	臺北航空氣象中心 Taipei Aeronautical Meteorological Center 18HR
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND 2-hour validity / Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	MET codes, abbreviated plain language, charts Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface WX Chart, Upper Level WX Chart, SIGWX Prog Chart.
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	恆春管制塔臺 Hengchun TWR
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCKW AD 2.12 跑道場面特性

RCKW AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
14	138.70	1700 x 30	RWY: PCR 180/R/B/W/U CONC SWY: NIL	220248.01N 1204329.14E 220206.47N 1204408.26E GUND: 73 FT	THR: 30 FT TDZ: NIL
32	318.73	1700 x 30	RWY: PCR 180/R/B/W/U CONC SWY: NIL	220206.47N 1204408.26E 220248.01N 1204329.14E GUND: 73 FT	THR: 46 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩 衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
14	NIL	NIL	NIL	1820 x 150	90 x 60
32	NIL	NIL	NIL	1820 x 150	90 x 60
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
14	NIL	NIL	NIL		
32	NIL	NIL	NIL		

RCKW AD 2.13 公布距離

RCKW AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
14	1700	1700	1700	1700	NIL
32	1700	1700	1700	1700	NIL

RCKW AD 2.14 進場及跑道燈光設備

RCKW AD 2.14 APPROACH AND RUNWAY LIGHTING

RCKW AD 2.18 飛航服務無線電通訊設施
RCKW AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
TWR	HENGCHUN TOWER	118.25 MHZ	0100-0900 (UTC)	NIL
		121.50 MHZ		Emergency
		236.60 MHZ		NIL
		243.00 MHZ		Emergency

RCKW AD 2.19 無線電助導航設施
RCKW AD 2.19 RADIO NAVIGATION AND LANDING AIDS

設施類別、磁 差、ILS/MLS類別 (VOR/ILS/ MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of op- era- tion	電臺發射 天線位置 Site of trans- mitting an- tenna co- ordinates	DME 天線標高 Elevation of DME transmit- ting antenna	備註 Remarks
1	2	3	4	5	6	7
VOR/DME (04° W)	HCN	113.70 MHZ (CH84X)	H24	215540.0N 1205036.9E	403 FT	VOR因地形關係，輻 向322-342於40NM 外、6000FT以下不能使用。 Due to terrain, VOR radi- al 322-342 beyond 40NM, below 6000FT unusable.
L	KT	425.00 KHZ	H24	220237.5N 1204350.4E		
DME	KTG	(CH74X)	H24	220237.6N 1204350.1E	53 FT	TX: 1161MHZ RX: 1098MHZ

RCKW AD 2.20 本場飛航規定
RCKW AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場作業規定

1. 本機場開放使用之時段如下表 (表列時間為UTC - 國際標準時間)

Day	Time	Day	Time
Monday	0100-0600, 0800-0900	Friday	0300-0900
Tuesday	0300-0600, 0800-0900	Saturday	0100-0900
Wednesday	0300-0600, 0800-0900	Sunday	0100-0900

2.20.1 AIRPORT REGULATIONS

1. Airport is available only during UTC time tabulated below:

Day	Time	Day	Time
Thursday	0300-0600, 0800-0900	National Holidays	0100-0900

註解：機場作業時間如恆春機場AD 2.3欄位所載。

NOTE: Refer RCKW AD 2.3 for airport operational hours.

- 恆春機場因進場建築物障礙而為特殊機場。
- 因14/32跑道可能供其他活動使用，倘有臨時降落需求須於15分鐘前通知。
- 固定翼航空器不得實施特種目視飛航。

- Hengchun airport is designated as a special airport due to obstacles on approaching phrase.
- RWY 14/32 may be used for other activities. 15 minutes prior notice required for temporary landing request.
- Special VFR operation is prohibited for fixed-wing aircraft.

RCKW AD 2.21 降低噪音程序 RCKW AD 2.21 NOISE ABATEMENT PROCEDURES NIL

RCKW AD 2.22 飛航程序 RCKW AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

等待點 Holding Fix	經緯度 Coordinates
JINGO	215956.00N 1204223.00E

註解：其他資訊參照ENR 1.5.6及相關航圖。

Note: other information refer to ENR 1.5.6 and related charts.

RCKW AD 2.23 其他資訊 RCKW AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

鳥種 Type of Bird	活動季節與時間 Time of Activity	活動區域 Area of Activity	飛行高度 Flight Height	特性 Characteristics
白鷺、黃頭鷺 Egret, Cattle egret	3月至9月份 MAR to SEP	跑道、草坪 Runway, grass area	GND-100FT	重約370g，中型鳥種 Weighs around 370g, medium-sized species
小環頸雉、東方環頸雉、燕雉 Little ringed-neck plover, Kentish plover, Eastern collard pratincole	8月至翌年3月份 AUG to MAR	跑道、滑行道、停機坪 Runway, taxiway, apron	GND-80FT	重約30至80g，小型鳥種 Weighs around 30-80g, small-sized species
麻雀 Tree sparrow	全年 Whole year	機場內 At the airport	GND-60FT	重約22g，小型鳥種 Weighs around 22g, small-sized species
紅隼 Eurasian Kestrel	11月至翌年2月份 NOV to FEB	機場內 At the airport	GND-100FT	重約300g，中型鳥種 Weighs around 300g, medium-sized species

註解: 上表所列之時間係本地時間 (UTC+8) , 另鳥類飛行高度 , 係觀察鳥類活動所目測之概估值。

Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.

RCKW AD 2.24 本場航圖 RCKW AD 2.24 CHARTS RELATED TO AN AERODROME

THIS PAGE
INTENTIONALLY
LEFT BLANK

RCLY AD 2.11 氣象資訊之提供

RCLY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	蘭嶼航空氣象臺 Lanyu Aeronautical Weather Station
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	2230 - 1000 (UTC) 蘭嶼航空氣象臺(其他時段視需求提供) Lanyu Aeronautical Weather Station (other time on request)
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	臺北航空氣象中心 Taipei Aeronautical Meteorological Center 18HR
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	2-hour validity Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL(abbreviated plain language text), C(Charts) Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx chart, SigWx prog chart, and upper level Wx chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	蘭嶼機場管制臺, 高雄近場管制塔臺 Lanyu TWR, Kaohsiung APP
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCLY AD 2.12 跑道場面特性

RCLY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
13	129.96	1132 x 30	RWY: PCR 269/R/D/W/T CONC SWY: NIL	220154.86N 1213146.77E 220131.14N 1213216.93E GUND: NIL	THR: 42 FT TDZ: NIL
31	309.96	1132 x 30	RWY: PCR 269/R/D/W/T CONC SWY: NIL	220131.14N 1213216.93E 220154.86N 1213146.77E GUND: NIL	THR: 43 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩 衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
13	NIL	NIL	NIL	1248 x 40	NIL
31	NIL	NIL	NIL	1248 x 40	NIL
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
13	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
31	NIL	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCLY AD 2.13 公布距離

RCLY AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
13	1132	1132	1132	1132	NIL

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
31	1132	1132	1132	1132	NIL

RCLY AD 2.14 進場及跑道燈光設備

RCLY AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Designator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
13	RTIL White Uni-di- rectional Flash FREQ 60/MIN	Green No WBAR	APAPI LEFT/3.25° (31 FT)	NIL	NIL	1132M, 60M, White/Yellow, LIH	Red No WBAR	NIL
31	RTIL White Uni-di- rectional Flash FREQ 60/MIN	Green No WBAR	APAPI RIGHT/3° (28 FT)	NIL	NIL	1132M, 60M, White/Yellow, LIH	Red No WBAR	NIL
跑道名稱 RWY Designator	備註 Remarks							
1	10							
13	APAPI angular coverage restricted to 4.968° left side of runway center line in the approach direction.							
31	APAPI angular coverage restricted to 4.842° right side of runway center line in the approach direction.							

RCLY AD 2.15 其他燈光設備及備用電源


RCLY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/ Green every 5 sec.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	NIL
4	備用電源 / 切換時間 Secondary power supply/switch-over time	NIL
5	備註 Remarks	NIL

RCLY AD 2.16 直昇機降落區

RCLY AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	220138.95N 1213205.13E
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	43 FT
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	35 x 35 M CONC Allowable for ACFT up to 20000 lb. in weight Reflecting H Mark
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	Rotating beacon, flood light, perimeter light
7	備註 Remarks	氣象裝備：夜用風向袋一個。 進、離場方向：與固定翼相同。 用途：僅供夜間救難使用。 定翼機於跑道起降時段，直昇機不得於本起降場作業或停放。 Met equipment: lighted wind cone(1). APP/DEP direction: same as fixed-wing aircraft. Purpose: nighttime rescue use only. No helicopter movement or parking is permitted during hours of fixed-wing aircraft.

顯示訊息 Display Information			
閃爍的紅色箭頭表示需要調整的方向，而黃色航機圖示則表示航機偏離中心線的程度。 The flashing red arrow shows which direction to steer, while the yellow aircraft icon indicator gives an indication of how far the aircraft is off the centerline.		當航機距離停止位置30M，黃色中心線隨著航機前進而縮短，數字顯示停止位置前的距離。 When the aircraft is 30M from the stop-position, the yellow center line indicator reduced and the digital countdown will indicate the remaining distance toward the stop position.	
當到達正確的停止位置時，以紅框字體顯示STOP。 When the correct stop-position is reached, the STOP sign in red with red border will be displayed.		若航機停妥於正確位置，稍候顯示OK。 If the aircraft stops at the correct position, OK will be displayed after a few seconds.	
地面人員已放置輪檔。 The aircraft wheel chocks have been set by ground personnel.		若航機超過停止位置，顯示TOO FAR。 If the aircraft has overshot the stop position, TOO FAR will be displayed.	
航機必須在正確停止位置前15M完成識別，否則系統顯示WAIT、STOP及ID FAIL。 The aircraft must be identified at least 15m before the correct stop position. Otherwise, WAIT, STOP and ID FAIL will be displayed.			
航機應以最低速滑行進入停機位，若航機進入時超過允許速度，或遇濃霧/大雨造成系統視程降低，系統顯示SLOW。 Aircraft shall taxi into the stand at minimum speed. If the aircraft is approaching faster than the accepted speed, or the visibility of system is reduced due to heavy fog/rain, SLOW will be displayed.		任何在停靠程序中無法恢復的錯誤將導致SBU (Safety back-up) 狀態。系統停用，航機由引導員人工導引。 Any unrecoverable error during the docking procedure will generate an SBU (Safety back-up) condition. The system will be suspended, and the aircraft must be manually guided in by marshaller.	
若系統與進入航機之間視線受阻，例如雷射透鏡或雷射視窗有髒污，或最近之目視區有其他障礙物，停靠程序中止並顯示WAIT與VIEW BLOCK訊息。系統停用，航機由引導員人工導引。 If the view towards the approaching aircraft is hindered, for example, internally in the unit of the laser lens or on the laser window by dirt, or another obstacle in the closest view area, the docking procedure will be halted with a WAIT and VIEW BLOCK message. The system will be suspended, and the aircraft must be manually guided in by marshaller.		若發現有物體阻擋系統與航機預定停止位置的視線，停靠程序中止並顯示WAIT與GATE BLOCK訊息。系統停用，航機由引導員人工導引。 If an object is found blocking the approach to gate view from the system to the planned stop-position for the aircraft, the docking procedure will be halted with a WAIT and GATE BLOCK message. The system will be suspended, and the aircraft must be manually guided in by marshaller.	

RCMQ AD 2.10 機場障礙物 RCMQ AD 2.10 AERODROME OBSTACLES

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標高、標示、障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
18APCH/36TKOF	Tree 685FT	241709.69N 1203706.34E	
	Tree 674FT	241705.64N 1203711.49E	
	Tree 671FT	241658.93N 1203712.09E	
	Tree 665FT	241655.77N 1203712.43E	
	Tree 665FT	241656.19N 1203712.28E	

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCMQ AD 2.11 氣象資訊之提供 RCMQ AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	清泉崗空軍基地 Cingcyuangang Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	天氣中心 WX Center H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	Abbreviated plain language, charts Chinese
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	S12, U85, U7, U5, U3, U2 (Remark: S: Surface analysis chart, U: upper level analysis chart)
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	NIL

10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL
----	--	-----

RCMQ AD 2.12 跑道場面特性

RCMQ AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
18	176.69	3659 x 61	RWY: PCR 410/R/A/W/T CONC SWY: NIL	241653.58N 1203710.65E 241454.86N 1203718.52E GUND: 64 FT	THR: 653 FT TDZ: 657 FT
36	356.69	3659 x 61	RWY: PCR 410/R/A/W/T CONC SWY: NIL	241454.86N 1203718.52E 241653.58N 1203710.65E GUND: 64 FT	THR: 663 FT TDZ: 665 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
18	NIL	NIL	NIL	3779 x 300	240 x 150
36	NIL	NIL	NIL	3779 x 300	90 x 90
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
18	THR 3686 M 61QSII ELEV 678 FT THR 3263 M BAK_14_HOOK	NIL	NIL		
36	THR 3684 M 61QSII ELEV 688 FT THR 3278 M BAK_14_HOOK	NIL	跑道端安全區寬度不符 Annex 14 之規定。 The width of RESA does not meet criteria in Annex 14.		

RCMQ AD 2.13 公布距離
RCMQ AD 2.13 DECLARED DISTANCES


跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
18	3659	3659	3659	3659	NIL
36	3659	3659	3659	3659	NIL

交叉口起飛 INTERSECTION TAKE-OFF					
跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
18	W5	2350	2350	2350	NIL
	W6	2650	2650	2650	NIL
36	W3	2650	2650	2650	NIL
	W4	2350	2350	2350	NIL

RCMQ AD 2.14 進場及跑道燈光設備
RCMQ AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有無翼排燈 THR LGT colour WBAR	目視進場 滑降指示燈 (最低眼高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長度、間距、 顏色、強度 RWY Cen-tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末端燈顏色、 有無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
18	RAI 300M White, FLG LIH, Uni-dir	Green WBAR	PAPI LEFT/3° (57.32 FT)	NIL	NIL	3659M, 60M, White, Yellow, LIH	Red No WBAR	NIL
36	ALSF-1 900M LIH	Green WBAR	PAPI LEFT/3° (56.68 FT)	NIL	NIL	3659M, 60M, White, Yellow, LIH	Red No WBAR	NIL

臺中/清泉崗機場
Taichung/Cingcyuangang Aerodrome

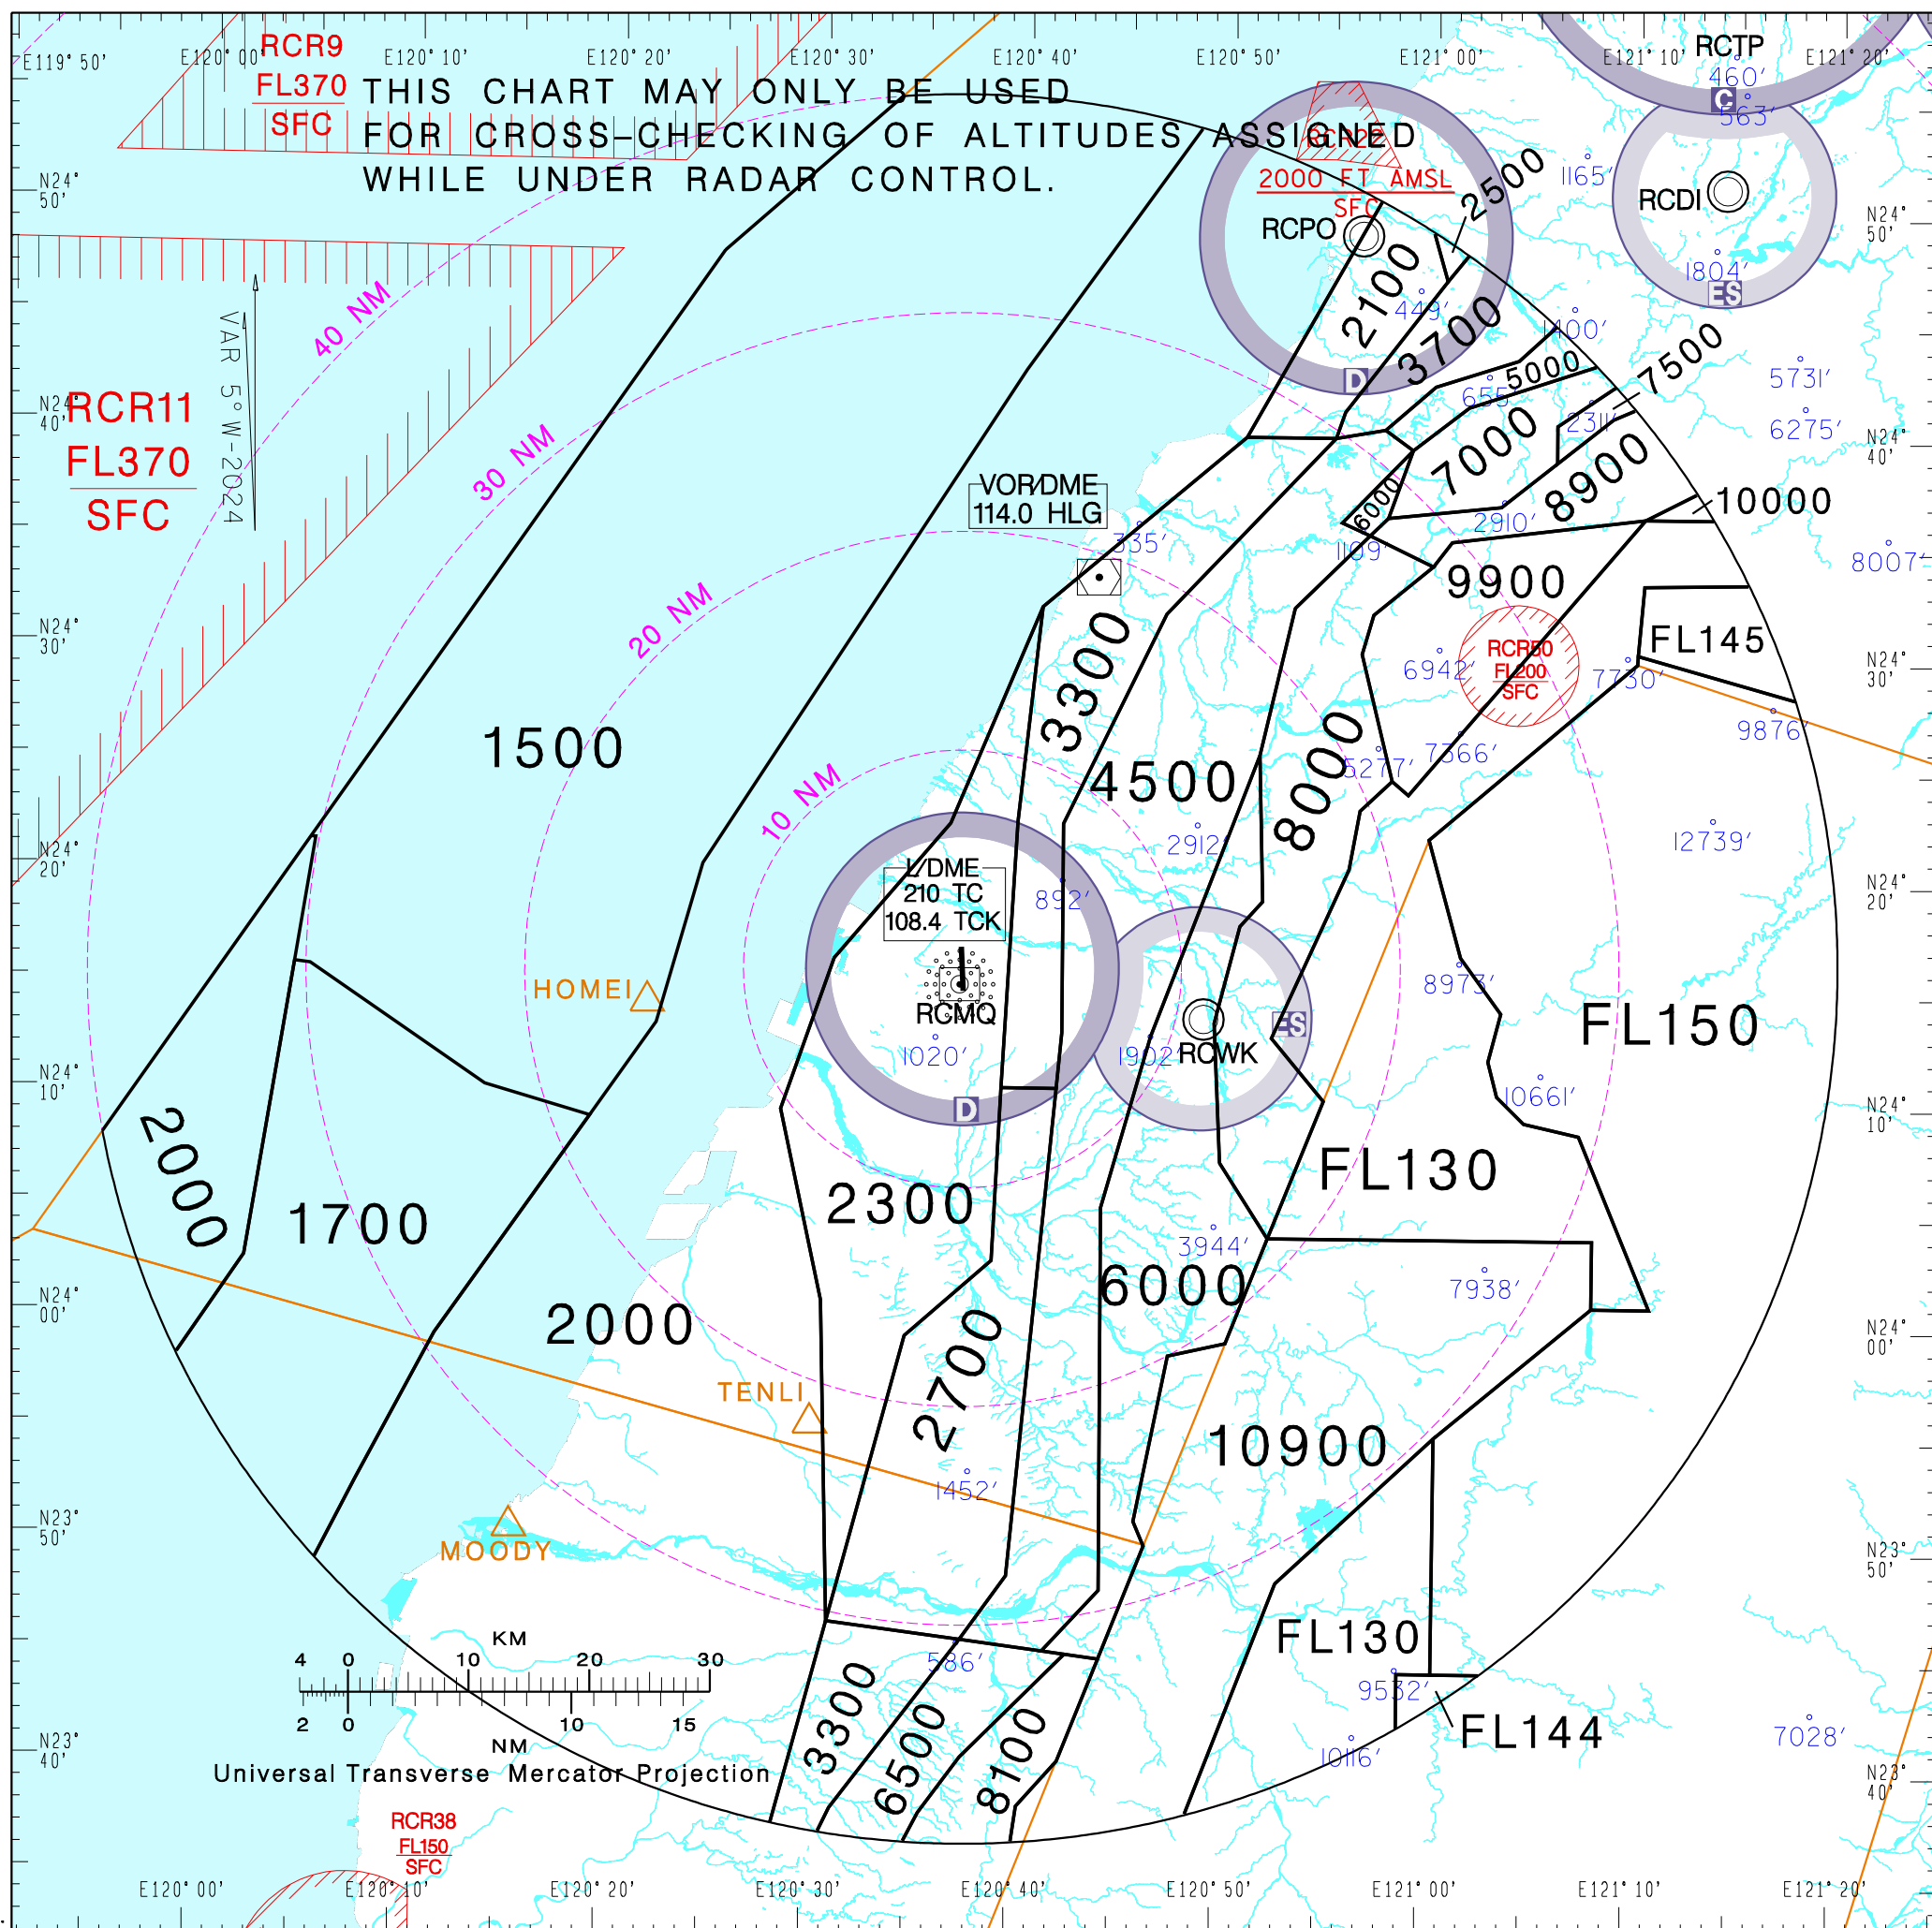

1. Distance circles are centred on RCMQ ARP (241554N 1203715E).
2. Minimum altitudes are calculated taking into account of minimum clearance above terrain/obstacles. Radar control service cannot be provided to aircraft below the applicable minimum. Aircraft at designated altitude in relevant sector is not assured of radar contact.
3. Altitudes, Levels and Heights are in feet.
4. Only significant spot heights are shown.
5. LOSS OF COMMUNICATION
 - a. SQUAWK 7600 immediately, and
 - b. follow AIP ENR 1.6.4 "Radio Communication Failure Procedures."

CHANGES: MVA SECTOR UPDATED.

THIS PAGE
INTENTIONALLY
LEFT BLANK

RCMT AD 2.1 機場航用地名及名稱

RCMT AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RCMT - 馬祖/北竿 MATSU/BEIGAN

RCMT AD 2.2 機場地理與管理資料

RCMT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	機場之參考點 位置 ARP coordinates and site at AD	261327N 1200010E CENTER POINT of RWY 03/21
2	與城市之距離方向 Direction and distance from (city)	NIL
3	機場標高/參考溫度 Elevation/Reference temperature	41 FT / 31° C
4	機場標高位置之大地基準面起伏 Geoid undulation at AD ELEV PSN	45 FT
5	磁差/每年改變率 MAG VAR/Annual change	5° W (2026)/0.03° W
6	機場管理單位，郵寄地址，電話號碼， 傳真，電傳，航空固定通信服務地址代 字 AD Administration, address, tele- phone, telefax, telex, AFS	馬祖航空站 MATSU AIRPORT OFFICE 連江縣北竿鄉塘岐村261之2號 NO.261-2, TAICHI VILLAGE, BEIGAN TOWNSHIP, LIENCHIANG COUNTY 209, TAIWAN, R.O.C. Tel: 886-836-56505 Fax: 886-836-56504 AFS: RCMTZTZX
7	許可飛航類別 (IFR/VFR) Types of traffic permitted (IFR/VFR)	IFR/VFR
8	備註 Remarks	NIL

RCMT AD 2.3 作業時間

RCMT AD 2.3 OPERATIONAL HOURS

1	機場管理單位 AD Administration	2300-1100 (UTC)
2	海關及證照查驗 Customs and immigration	NIL
3	衛生及檢疫 Health and sanitation	NIL
4	飛航諮詢 AIS Briefing Office	NIL
5	飛航計畫服務 ATS Reporting Office (ARO)	NIL
6	氣象諮詢 MET Briefing Office	2100-1130 (UTC)
7	飛航服務 ATS	2330-1130 (UTC)
8	航空燃油加油服務 Fuelling	NIL

9	機場勤務 Handling	2330-1130 (UTC)
10	安檢單位 Security	2330-1130 (UTC)
11	除冰服務 De-icing	NIL
12	備註 Remarks	氣象諮詢，飛航服務視航情需要，彈性增加服務時間。 Operational hours of MET briefing office and ATS will be lengthened to meet operations.

RCMT AD 2.4 裝卸服務與設備

RCMT AD 2.4 HANDLING SERVICES AND FACILITIES

1	貨物裝卸設備 Cargo-handling facilities	NIL
2	燃油/滑油型式 Fuel/oil types	NIL
3	加油設備/能力 Fuelling facilities/capacity	NIL
4	除冰設備 De-icing facilities	NIL
5	來機可用之廠棚 Hangar space for visiting aircraft	NIL
6	來機之修護裝備 Repair facilities for visiting aircraft	NIL
7	備註 Remarks	NIL

RCMT AD 2.5 商旅服務

RCMT AD 2.5 PASSENGER FACILITIES

1	住宿設備 Hotels	NIL
2	膳食供應 Restaurants	NIL
3	聯外交通 Transportation	NIL
4	醫療設備 Medical facilities	NIL
5	銀行及郵局 Bank and Post Office	NIL
6	旅客服務中心 Tourist Office	NIL
7	備註 Remarks	NIL

RCMT AD 2.6 救援與消防設備

RCMT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	機場消防等級 AD category for fire fighting	CAT 5
---	---	-------

RCMT AD 2.13 公布距離
RCMT AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
03	1150	1150	1150	1150	NIL
21	1150	1150	1150	1150	NIL

RCMT AD 2.14 進場及跑道燈光設備
RCMT AD 2.14 APPROACH AND RUNWAY LIGHTING


跑道名稱 RWY Des-ignator	進場燈 型式、長 度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
03	RTIL White Uni-dir. Flash FREQ 120/MIN	Green WBAR	APAPI LEFT/3° (41 FT)	NIL	NIL	1150M, 60M, white, yellow, LIH	Red No WBAR	NIL
21	RTIL White Omni-dir. Flash FREQ 60/MIN	Green WBAR	PAPI RIGHT/3.3° (47.5 FT)	NIL	NIL	1150M, 60M, white, yellow, LIH	Red No WBAR	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
03	跑道邊燈間距:最後1具間距10M。 RWY edge light spacing: The space of last 2 lights is 10M.							

跑道名稱 RWY Des-ignator	備註 Remarks
1	10
21	1. 跑道邊燈間距:第1具間距10M。 2. 受地形影響，PAPI 左側橫向角度涵蓋範圍7.822°外不可使用。 1. RWY edge light spacing: The space of first 2 lights is 10M. 2. Due to terrain, PAPI left side beyond the angular coverage 7.822° unusable.

RCMT AD 2.15 其他燈光設備及備用電源

RCMT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置，特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: On top of the tower. White/Green, every 5 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light : Blue
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Secondary power supply/5-10 sec.
5	備註 Remarks	NIL

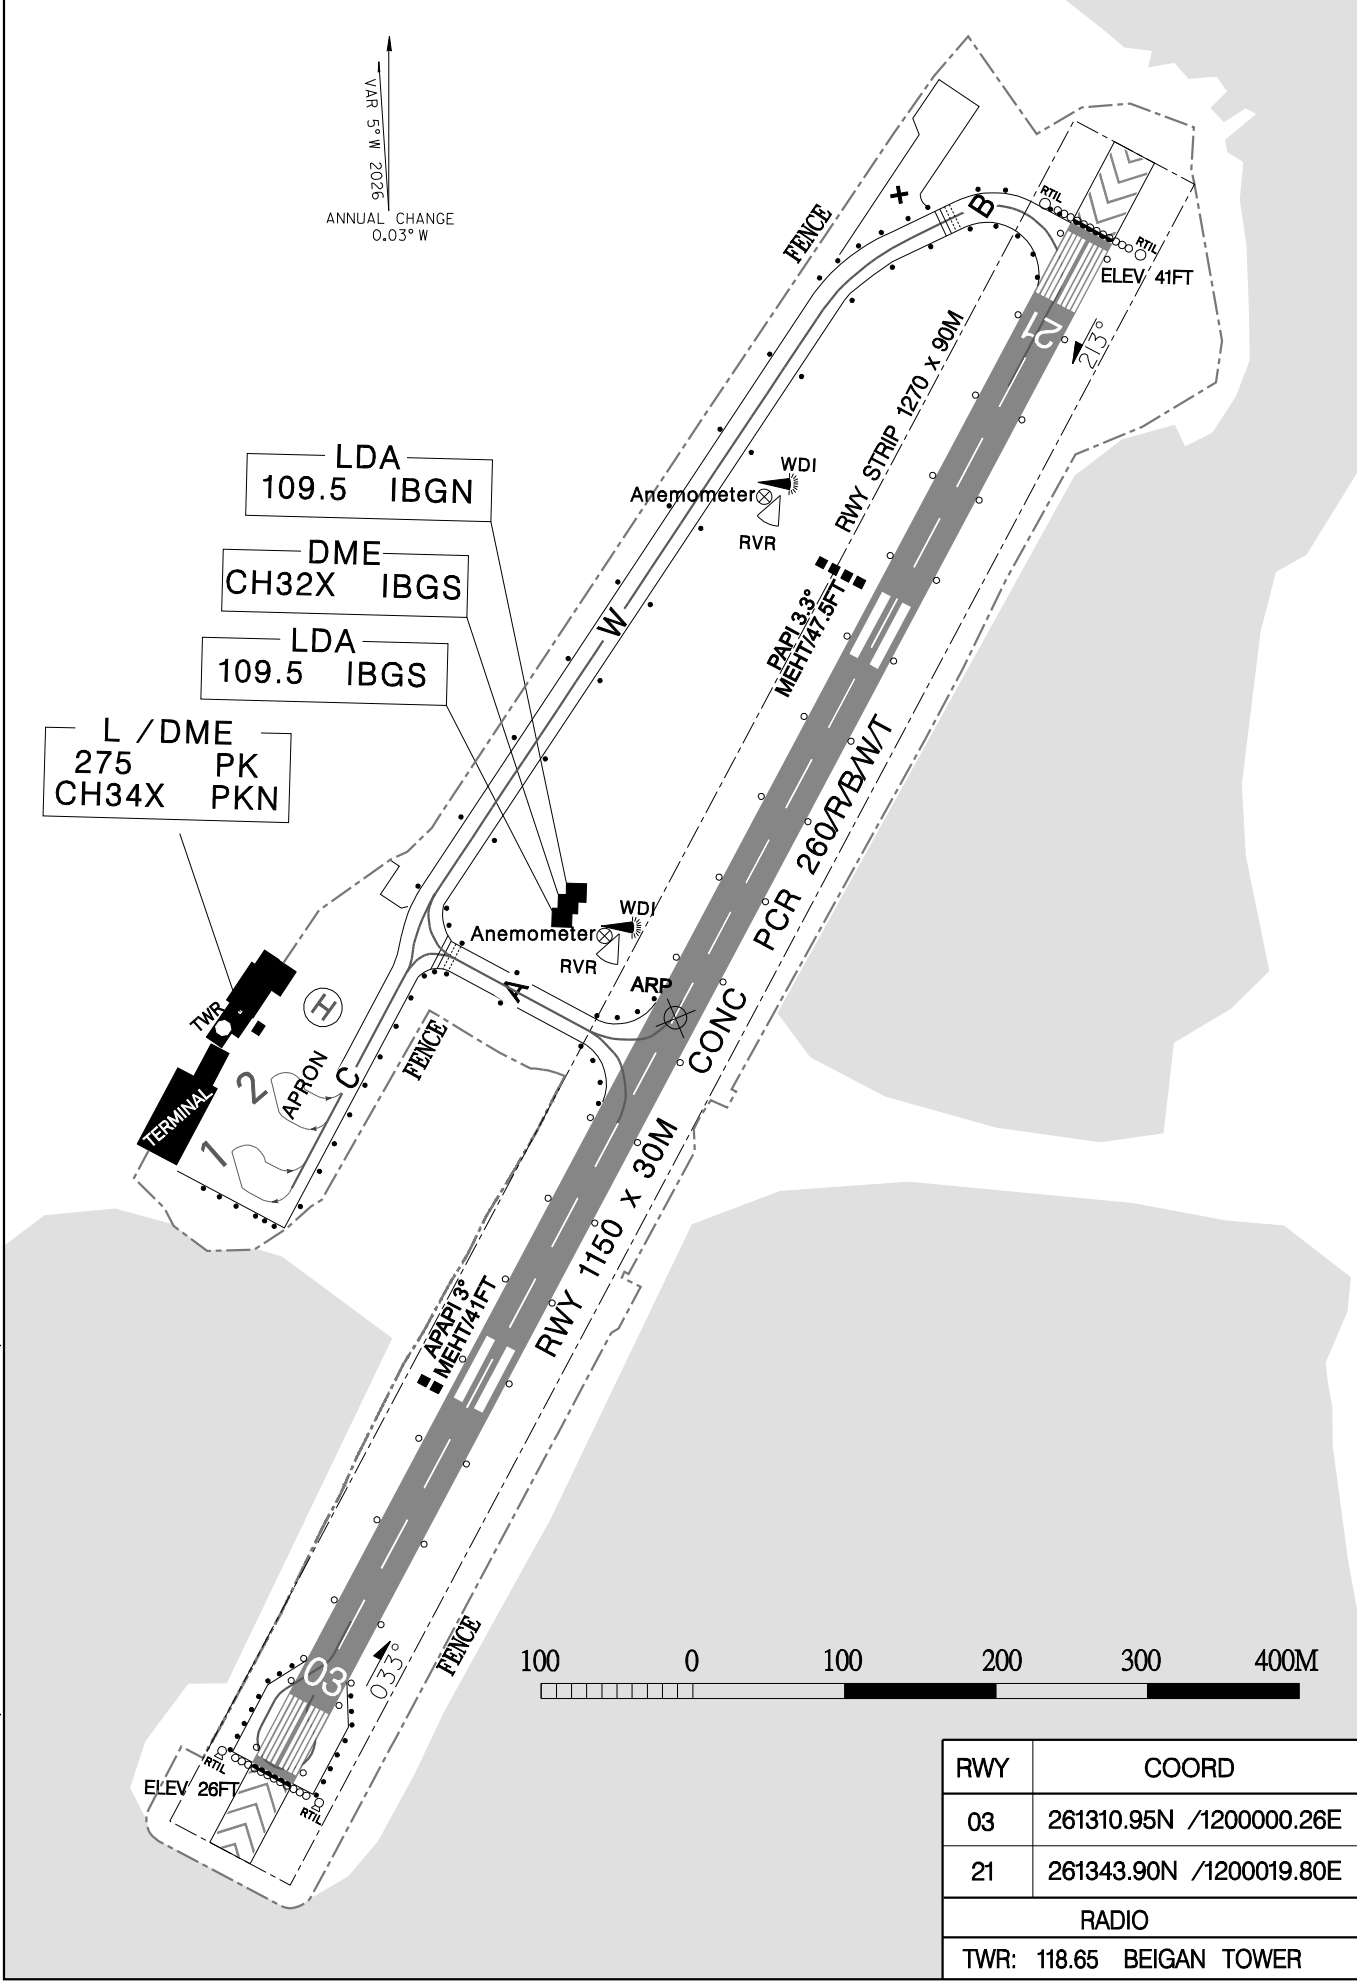


CHANGES: RE-CHART; MAG VAR ANNUAL CHANGE; RWY MAG BRG

THIS PAGE
INTENTIONALLY
LEFT BLANK

AERODROME OBSTACLE CHART-TYPE A (OPERATING LIMITATIONS)

馬祖/北竿機場
MATSU/BEIGAN AD

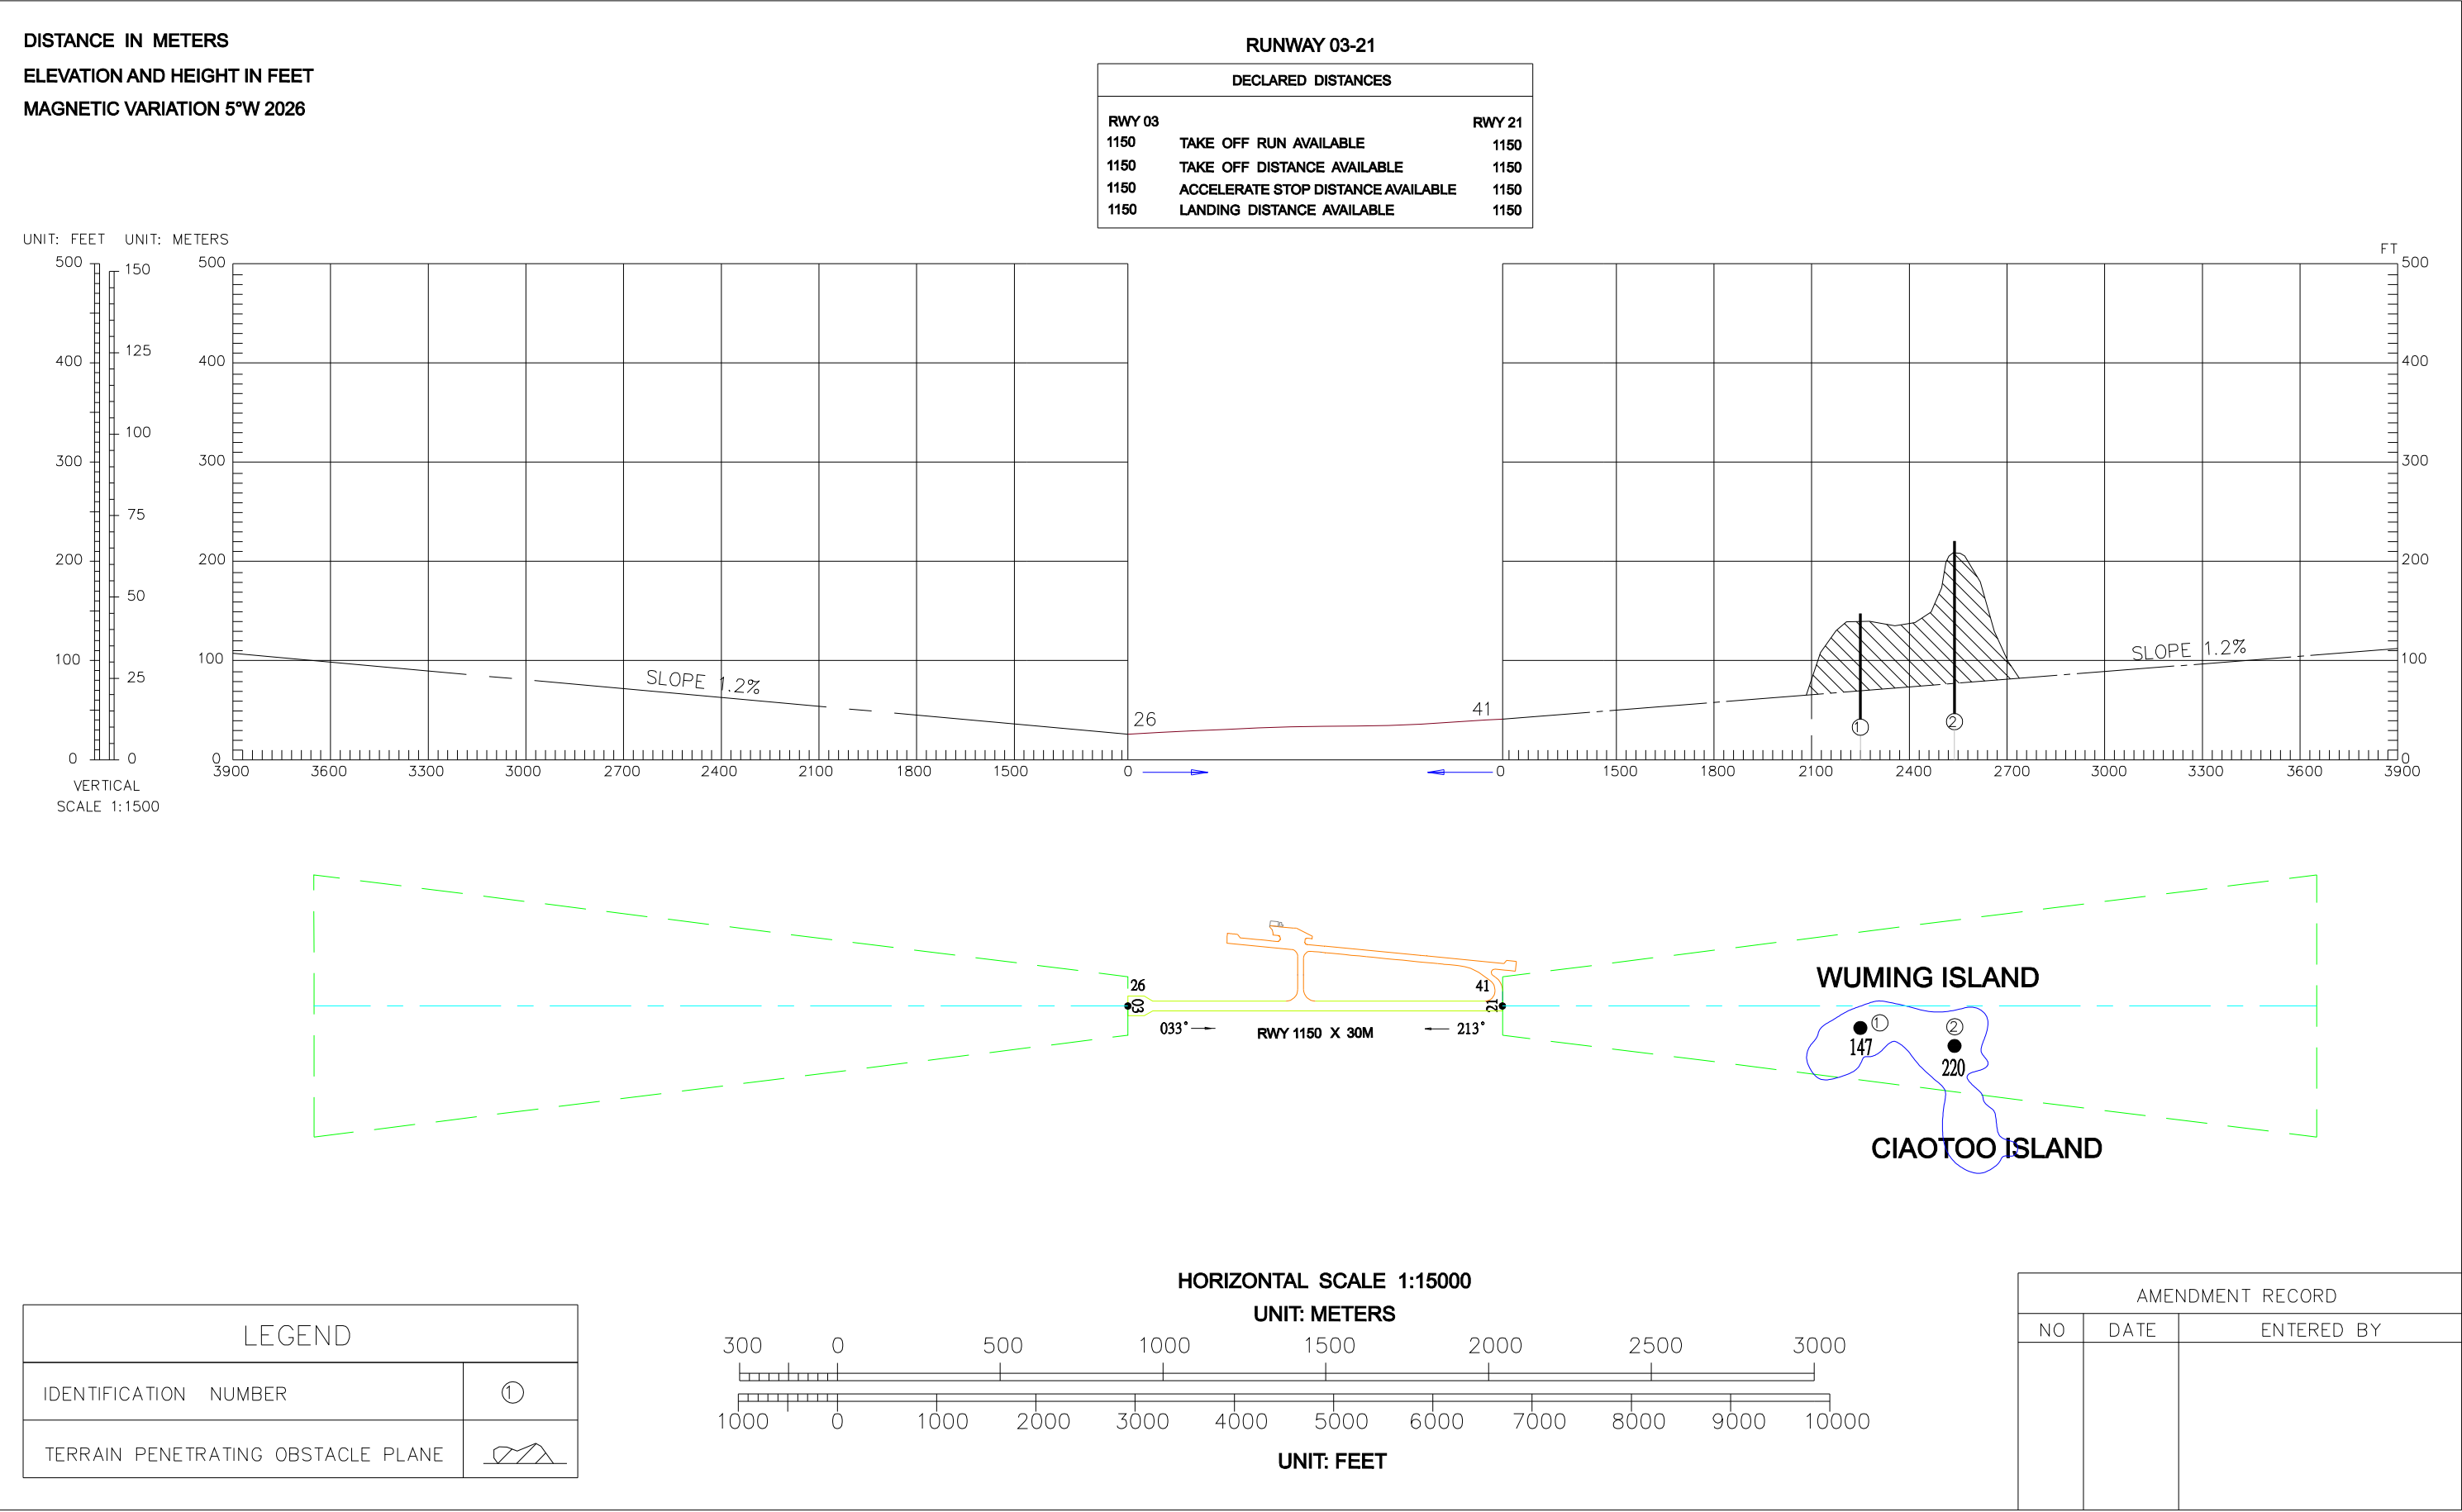

THIS PAGE
INTENTIONALLY
LEFT BLANK

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標高、標示/障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
	Tree 101FT	225803.47N 1201228.59E	
	Tree 142FT	225840.88N 1201230.49E	

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCNN AD 2.11 氣象資訊之提供

RCNN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	臺南空軍基地 Tainan Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	臺南空軍基地 Tainan Air Base H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND hourly
5	簡報/諮詢方式 Briefing/consultation provided	Personal briefing and consultation,
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL, C (Charts, abbreviated plain language text) Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx Chart, Upper Level Wx Chart, Upper Wind and Temperature Chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	NIL
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCNN AD 2.12 跑道場面特性

RCNN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
18L	178.72	3050 x 45	RWY: PCR see ADC CONC SWY: NIL	225751.09N 1201226.00E 225611.96N 1201228.40E GUND: 65.2 FT	THR: 63 FT TDZ: 63 FT
36R	358.72	3050 x 45	RWY: PCR see ADC CONC SWY: NIL	225611.96N 1201228.40E 225751.09N 1201226.00E GUND: 65.4 FT	THR: 32 FT TDZ: 44 FT
18R	178.86	3050 x 45	RWY: 18000KG ESWL CONC SWY: NIL	225750.83N 1201213.63E 225611.70N 1201216.04E GUND: 65.1 FT	THR: 56 FT TDZ: NIL
36L	358.86	3050 x 45	RWY: 18000KG ESWL CONC SWY: NIL	225611.70N 1201216.04E 225750.83N 1201213.63E GUND: 65.4 FT	THR: 25 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩 衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
18L	NIL	NIL	NIL	3170 x 280	180 x 90
36R	NIL	NIL	NIL	3170 x 280	200 x 90
18R	NIL	NIL	NIL	NIL	NIL
36L	NIL	NIL	NIL	NIL	NIL

跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks
1	12	13	14
18L	THR 3090 M 61QSII ELEV 57 FT THR 2600 M BAK_14_HOOK	NIL	NIL
36R	THR 3094 M 61QSII ELEV 88 FT THR 2590 M BAK_14_HOOK	NIL	NIL
18R	NIL	NIL	僅供中華民國空軍使用。 Used solely by ROCAF ACFT.
36L	NIL	NIL	僅供中華民國空軍使用。 Used solely by ROCAF ACFT.

RCNN AD 2.13 公布距離

RCNN AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
18L	3050	3050	3050	3050	NIL
36R	3050	3050	3050	3050	NIL
18R	Not Usable	Not Usable	Not Usable	Not Usable	NIL
36L	Not Usable	Not Usable	Not Usable	Not Usable	NIL

交叉口起飛 INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
18L	D	2031	2031	2031	NIL
36R	B	2278	2278	2278	NIL

RCNN AD 2.14 進場及跑道燈光設備

RCNN AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Designator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有無翼排燈 THR LGT colour WBAR	目視進場滑降指示燈 (最低眼高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長度、間距、 顏色、強度 RWY Centre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末端燈顏色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
18L	MALSF 420M LIM	Green WBAR	PAPI LEFT/3°	NIL	NIL	3050M, 60M, White, White/Yellow, LIH	Red No WBAR	NIL
36R	MALSR 720 M LIM	Green WBAR	PAPI LEFT/3°	NIL	NIL	3050M, 60M, White, White/Yellow, LIH	Red No WBAR	NIL
18R	NIL	Green	PAPI LEFT/3°	NIL	NIL	White	Red	NIL
36L	NIL	Green	PAPI LEFT/3°	NIL	NIL	White	Red	NIL
跑道名稱 RWY Designator	備註 Remarks							
1	10							
18L	- MALSF：加設順序閃光燈之中亮度進場燈系統，屬FAA規範。 - MALSF: Medium-intensity Approach Lighting System with sequenced Flashers, FAA standard.							
36R	- MALSR：加設跑道對正指示燈之中亮度進場燈系統，屬FAA規範。 - MALSR: Medium-intensity Approach Lighting System with Runway alignment indicator lights, FAA standard.							
18R	NIL							
36L	NIL							

RCNN AD 2.15 其他燈光設備及備用電源

RCNN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green every 5 sec. HN or IMC.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: On the left side of RWY 36R. Lighted.

3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	滑行道邊燈: blue 18L/36R跑道相關各滑行道: RWY Guard LGT TWY edge light: blue All TWY associated with RWY 18L/36R: RWY Guard LGT
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Generator power supply/0 sec.
5	備註 Remarks	為軍機夜間滑行安全所需，E滑行道與停機坪交接區段設有嵌入式滑行道邊燈。 For the safety of military aircraft taxiing at night, inset Taxiway Edge Lights are installed between TWY E and adjoining Apron.

RCNN AD 2.16 直昇機降落區

RCNN AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	NIL

RCNN AD 2.17 飛航服務空域
RCNN AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	臺南機場 TAINAN AERODROME
2	空域上下限 Vertical limits	2500FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Tainan D Airspace.
4	航管單位呼號 使用語言 ATS unit call sign Language(s)	TAINAN TOWER Chinese , English
5	轉換飛行高度 Transition altitude	11000FT
6	備註 Remarks	1. 高雄近場管制塔臺負責此空域內所有儀器飛航航空器之管制。 2. 於目視天氣情況時，臺南塔臺負責機場航線上航空器活動之管制。 3. 臺南機場一律使用西航線。 1. ATC service is provided to all IFR aircraft by Kaohsiung Approach in this area. 2. Tainan tower provides service to aircraft within the aerodrome traffic pattern under VMC. 3. West traffic pattern is used for Tainan Aerodrome.

RCNN AD 2.18 飛航服務無線電通訊設施
RCNN AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
TWR	TAINAN TOWER	118.40 MHZ	2300-1400 (UTC)	民用航空器主波道 Civil acft primary
		121.50 MHZ		NIL
		121.60 MHZ		航空器滑行，起飛前 許可頒發 及車輛管制 頻道。 ACFT taxiing and pre-takeoff clear- ance delivery; vehi- cle movement con- trol.
		126.18 MHZ		NIL
		236.60 MHZ		NIL
		243.00 MHZ		NIL
		275.80 MHZ		NIL

註解：臺南塔臺由中華民國空軍管理。

NOTE: TAINAN TWR operated by ROCAF.

RCNN AD 2.19 無線電助導航設施
RCNN AD 2.19 RADIO NAVIGATION AND LANDING AIDS

設施類別、磁差、ILS/MLS類別 (VOR/ILS/MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of operation	電臺發射 天線位置 Site of transmitting antenna coordinates	DME 天線標高 Elevation of DME transmitting antenna	備註 Remarks
1	2	3	4	5	6	7
LOC 18L ILS CAT I	ITNA	111.10 MHZ	H24	225603.7N 1201228.6E		前航道區角：3.7°， 因受地形影響，仰角1.69°以下信號不能使用。 Front course sector angle: 3.7°, Unusable below 1.69° due to terrain.
GP 18L ILS CAT I		331.70 MHZ	H24	225740.7N 1201221.0E		滑降角3° Angle 3°, RDH 50FT
DME 18L ILS CAT I	ITNA	(CH48X)	H24	225740.6N 1201220.9E	75 FT	與18L跑道儀器降落系統滑降臺同址。 Co-located with RWY 18L ILS GP.
LOC 36R ILS CAT I	ITNN	110.10 MHZ	H24	225800.7N 1201225.8E		前航道區角：3.66° Front course sector angle: 3.66°
GP 36R ILS CAT I		334.40 MHZ	H24	225623.0N 1201222.9E		滑降角3° Angle 3°, RDH 54FT
DME 36R ILS CAT I	ITNN	(CH38X)	H24	225623.1N 1201222.7E	44 FT	與36R跑道儀器降落系統滑降臺同址。 Co-located with RWY 36R ILS GP.
VOR/DME (04° W)	TNN	113.30 MHZ (CH80X)	H24	230807.1N 1201222.3E	46 FT	

RCNN AD 2.20 本場飛航規定 RCNN AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場作業規定

1. 航空器地面操作限制

- 航空器在停機坪（含連接停機坪之滑行道）因滑行錯誤，或已滑過指定之停機位置，禁止自行於原地實施180度迴轉，此時駕駛員應向塔臺申請，獲同意後始可實施180度迴轉，如無法180度迴轉應立即告知塔臺並申請停車（或慢車）並告知需利用拖車，拖至所需之方向或指定之停放位置。
- 航空器在停機坪須靠已啟動之引擎使用大油門輔助其他引擎啟動時，禁止在停機坪實施。如作業上確切需要，經航空站航務組同意後轉告塔臺，通知駕駛員可將航空器利用拖車拖至滑行道上並平行後始可實施。在作業時，地面工作人員仍需隨時注意，以免危害後面其他航空器之活動。
- 因跑道配置關係，有二個地點常有航空器或車輛穿越跑道之情形，屬發生跑道入侵事件之潛在風險區，航空器及車輛請注意，茲列出熱點(HOT SPOT)如下：
 - D滑行道穿越18L/36R跑道進出之地點。
 - A及H滑行道穿越18L/36R、18R/36L跑道進出之地點。

2. 本場飛行規定

- 降落航空器，因突發情況，必須重飛時，應立即通知塔臺。
- 18R/36L跑道每日2130-2300 UTC
18L/36R跑道每日2130-2300UTC
實施外物預防作業。
註解：塔臺可視情況暫停上述活動。
- 由於塔臺視界障礙，航空器、車輛及人員在A及E滑行道間操作時，應特別小心。

3. 儀器飛航程序起飛天氣限度

2.20.1 AIRPORT REGULATIONS

1. Aircraft ground maneuvering restrictions

- Aircraft are not allowed to make a 180-degree turn when they deviate or taxi over the assigned stand (including the apron adjacent to taxiway) unless pilots' requests to tower are approved. If there is difficulty in making 180-degree turn, pilots should shut down or idle engines and inform ATC for towing service.
- Using high power on a running engine to start other engines is not permitted on the apron. However, if necessary, it will be permitted after the aircraft is towed to a position parallel to the assigned taxiway, the approval has been received from Flight Operation Section of the airport, and the pilot is directed by tower. The above must be conducted in such a manner that other aircraft movements are not affected.
- Because of the configuration of the runways and taxiways, there are 2 locations where aircraft and vehicles will have to frequently cross the runway. These locations with potential risk of runway incursion are listed below as Hot Spots, and heightened attention by pilot/drivers is necessary.

i. Taxiway D crossing Runway 18L/36R

ii. Taxiway A and H crossing runway 18L/36R and 18R/36L

2. Local flight restrictions

- When landing aircraft is to go-around, the pilot must notify the control tower immediately.
- For examine work, runway is closed daily as follows:
Runway 18R/36L 2130-2300UTC daily.
Runway 18L/36R 2130-2300UTC daily.
Remarks: tower may suspend the above examine work whenever situation requires.
- Due to view problem from tower, pilots, vehicle drivers and working personnel are caution advised while operating in the area of Taxiway A and E.

3. IFR Take-off Weather Minimum

引擎數 ENG	RWY36R/18L	
	REDL & RCL MARKING	NIL (DAY ONLY)
1	Visibility/ RVR 550M	Visibility 1600M
2		
3		
4		Visibility/RVR 800M

2.20.2 滑行作業

1. 本機場為軍民合用機場，民用航空器於正常運作情形下不得於18R/36L 跑道及下列滑行道滑行：A (18L/36R 跑道以西段)、C、D (18L/36R 跑道以西段)、E (D 至F 之間)、F (僅供180度迴轉使用，不得滑行)、G、H 及I。

2.20.2 TAXIING TO AND FROM STAND

1. This is a joint civil and military aerodrome. Under normal circumstance, civil aircraft shall not taxi on RWY 18R/36L and following TWY: A (west of RWY 18L/36R), C, D (west of RWY 18L/36R), E (between D and F), F (only for 180-degree turn, taxiing is not allowed) G, H and I.

RCNN AD 2.21 降低噪音程序
RCNN AD 2.21 NOISE ABATEMENT PROCEDURES
NIL

RCNN AD 2.22 飛航程序

RCNN AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

等待點 Holding Fix	經緯度 Coordinates
MITOR	224524.52N 1200757.91E

註解: 其他資訊參照ENR 1.5.6及相關航圖。

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

等待點 Holding Fix	經緯度 Coordinates
TNN VOR/DME	230807.10N 1201222.30E

Note: other information refer to ENR 1.5.6 and related charts.

RCNN AD 2.23 其他資訊 RCNN AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
麻雀、小雲雀、大卷尾、喜鵲、黑翅鳶 Eurasian Tree Sparrow, Oriental Skylark, Black Drongo, Eurasian Magpie, Black-winged kite	全年，每日0700至0900及1600至1700活動頻繁 Whole year, highly active at 0700-0900 and 1600-1700	18L/36R跑道兩側草坪、機場外西側農地 Grass beside RWY 18L/36R, west farmlands of the airport	GND-50FT	體重約22至240g，小型及中型鳥種。 Around 22-240g weight, small to medium sized species
紅隼 Eurasian Kestrel	每年11月至翌年2月份，每日0700至0900及1600至1700活動頻繁 From NOV to next FEB, highly active at 0700-0900 and 1600-1700	18L/36R跑道兩側草坪 Grass beside RWY 18L/36R	GND-50FT	體重約198g，中型鳥種。 Around 198g weight, medium sized species
短耳鴞、長耳鴞 Short-eared Owl, Long-eared Owl	每年11月至翌年2月份，每日1900至翌日0500活動頻繁 From NOV to next FEB, highly active at 1900-0500	18L/36R跑道兩側草坪 Grass beside RWY 18L/36R	GND-50FT	體重約200至500g，中型鳥種。 Around 200-500g weight, medium sized species
東方環頸鴉 Kentish Plover	每年11月至翌年2月份，每日0600至0800活動頻繁 From NOV to next FEB, highly active at 0600-0800	18L/36R跑道中段處東側草坪及停機坪 East side grass of middle RWY 18L/36R, apron	GND-50FT	體重約44g，小型鳥種。 Around 44g weight, small sized species
珠頸斑鳩、紅鳩 Spotted Dove, Red Turtle Dove	全年，每日0700至0900及1600至1800活動頻繁 Whole year, highly active at 0700-0900 and 1600-1800	機場外西側、西南側樹林及農地 West and south-west woods and farmland outside of the airport	GND-50FT	體重約106至154g，中型鳥種。 Around 106-154g weight, medium sized species
燕鴉、小環頸鴉 Oriental Pratincole, Little Ringed Plover	每年3月至6月份，每日0700至0900及1600至1800活動頻繁 From MAR to JUN, highly active at 0700-0900 and 1600-1800	18L/36R跑道中段處東側草坪及停機坪 East side grass of middle RWY 18L/36R, apron	GND-50FT	體重約35至80g，小型鳥種。 Around 35-80g weight, small sized species
鴿子 Pigeon	每年3月至6月份，7月至10月份每日0800至1100活動頻繁 From MAR to JUN and From JUL to OCT, highly active at 0800-1100	跑道、滑行道、機場各處草坪 RWY, TWYs and grass at the airport	100FT	體重約315g，中型鳥種。 Around 315g weight, medium sized species

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
黃頭鷺、小白鷺、中白鷺 Cattle Egret, Little Egret, Intermediate Egret	每年7月至10月份，每日0700至1000及1600至1800活動頻繁 From JUL to OCT, highly active at 0700-1000 and 1600-1800	18L/36R跑道中段處東側草坪及樹林、機場外西南側樹林、農地及魚塭 Grass and woods of east side of middle RWY 18L/36R; woods, farmlands and fish farms of south-western side of the airport	GND-100FT	體重約322至 600g，中型及大型鳥種。 Around 322-600g weight, medium to large sized species
家燕、洋燕、小雨燕 Barn Swallow, Pacific Swallow, House Swift	每年7月至10月份，每日0700至1000及1600至1800活動頻繁 From JUL to OCT, highly active at 0700-1000 and 1600-1800	18L/36R跑道兩側草坪 Grass beside RWY 18L/36R	GND-100FT	體重約15至 21g，小型鳥種。 Around 15-21g weight, small sized species

註解: 上表所列之時間係本地時間 (UTC+8)，另鳥類飛行高度，係觀察鳥類活動所目測之概估值。

Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.


RCNN AD 2.24 本場航圖
RCNN AD 2.24 CHARTS RELATED TO AN AERODROME

THIS PAGE
INTENTIONALLY
LEFT BLANK

機場圖
AERODROME CHART


AD ELEV 64FT ARP 225657N 1201240E

臺南機場
TAINAN AD

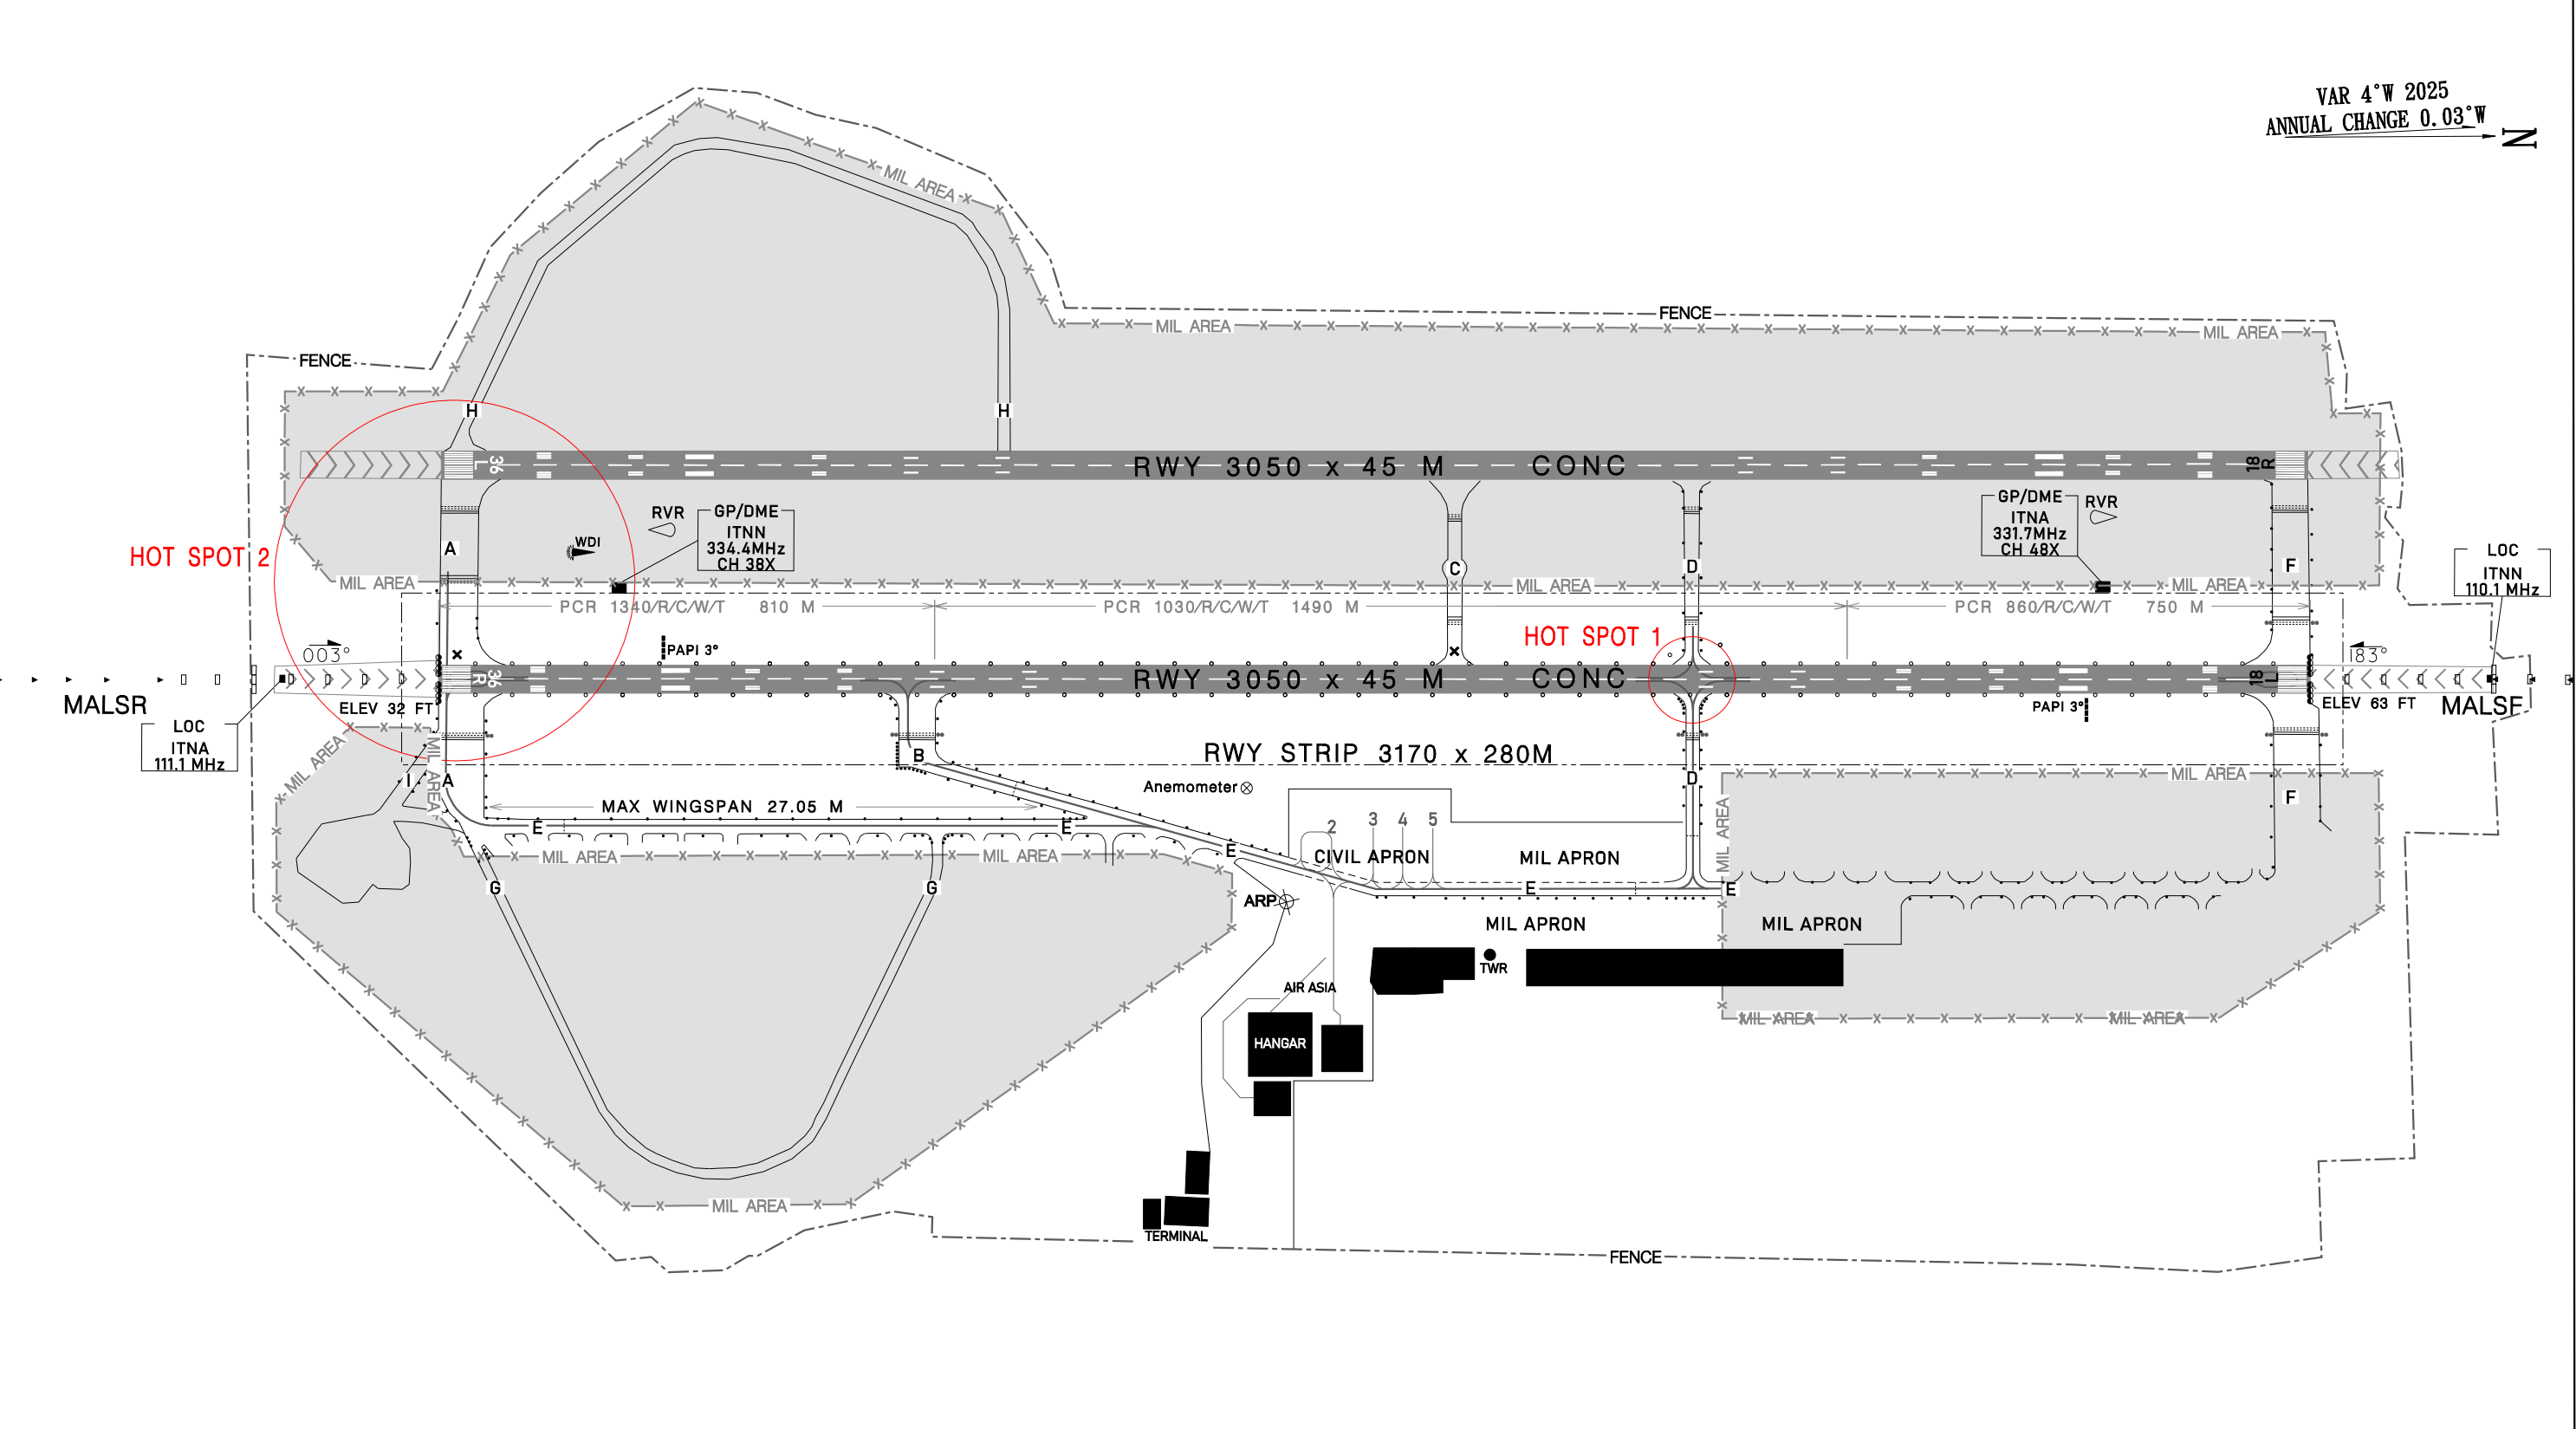

CHANGES: RE-CHART

RADIO	RWY	THR COORD
118.4 TAINAN TOWER	18L	225751.09N 1201226.00E
	36R	225611.96N 1201228.40E
121.6 TAINAN GROUND	18R	225750.83N 1201213.63E
	36L	225611.70N 1201216.04E



THIS PAGE
INTENTIONALLY
LEFT BLANK

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCQC AD 2.11 氣象資訊之提供

RCQC AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	馬公空軍基地 Magong Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	馬公空軍基地 Magong Air Base H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	NIL
5	簡報/諮詢方式 Briefing/consultation provided	Personal briefing and consultation, (closed circuit television)
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL, C (Charts, abbreviated plain language text). Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx chart and Upper level Wx chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	馬公機場管制臺 Magong TWR
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCQC AD 2.12 跑道場面特性

RCQC AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
02	018.22	3000 x 45	RWY: see ADC CONC SWY: NIL	233320.73N 1193725.12E 233453.36N 1193758.20E GUND: 59 FT	THR: 103 FT TDZ: 103 FT
20	198.22	3000 x 45	RWY: see ADC CONC SWY: NIL	233453.36N 1193758.20E 233320.73N 1193725.12E GUND: 59 FT	THR: 46 FT TDZ: 70 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
02	-0.59%	NIL	NIL	3120 x 192	240 x 100
20	+0.59%	NIL	NIL	3120 x 192	205 x 100
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
02	THR 3047 M 61QSII ELEV 68 FT THR 2635 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
20	THR 3047 M 61QSII ELEV 127 FT THR 2637 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCQC AD 2.13 公布距離
RCQC AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
02	3000	3000	3000	3000	NIL
20	3000	3000	3000	3000	NIL

交叉口起飛
INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
02	K2	2089	2089	2089	NIL
	K3	1000	1000	1000	NIL
20	K2	911	911	911	NIL
	K3	2000	2000	2000	NIL

RCQC AD 2.14 進場及跑道燈光設備
RCQC AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Designator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
02	MALSR 720 M LIM	Green WBAR	PAPI LEFT/3° (56 FT)	NIL	NIL	3000M, 60M, White, Yellow LIH	Red No WBAR	NIL
20	CAT1 720 M LIM	Green WBAR	PAPI LEFT/3° (60 FT)	NIL	NIL	3000M, 60M, White, Yellow LIH	Red No WBAR	NIL

跑道名稱 RWY Designator	備註 Remarks
1	10
02	1. MALSR為中亮度進場燈光系統，配有跑道對正指示燈，屬FAA規範。 2. 02 PAPI距02跑道頭400M。 1. MALSR is FAA standard, equipped with RAI. 2. 02 PAPI: 400M from THR 02.
20	20 PAPI距20跑道頭321M。 20 PAPI: 321M from THR 20.

RCQC AD 2.15 其他燈光設備及備用電源

RCQC AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置，特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: On top of the tower: White/ Green every 5 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	Taxiway edge light: Blue RWY guard lights
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Secondary power supply/15 sec.
5	備註 Remarks	NIL

航管監視最低高度圖
ATC Surveillance
Minimum Altitude Chart


AD ELEV. RCQC 103FT
Trans Level:FL130
Trans Alt:11,000'
RCWA 114FT

KAOSIUNG APP
128.1
129.9
234.8
299.6

MAGONG TOWER
118.3
236.6
ATIS 127.05

WANG-AN TOWER
118.9
121.5

澎湖機場 Penghu Aerodrome
望安機場 Wang-An Aerodrome

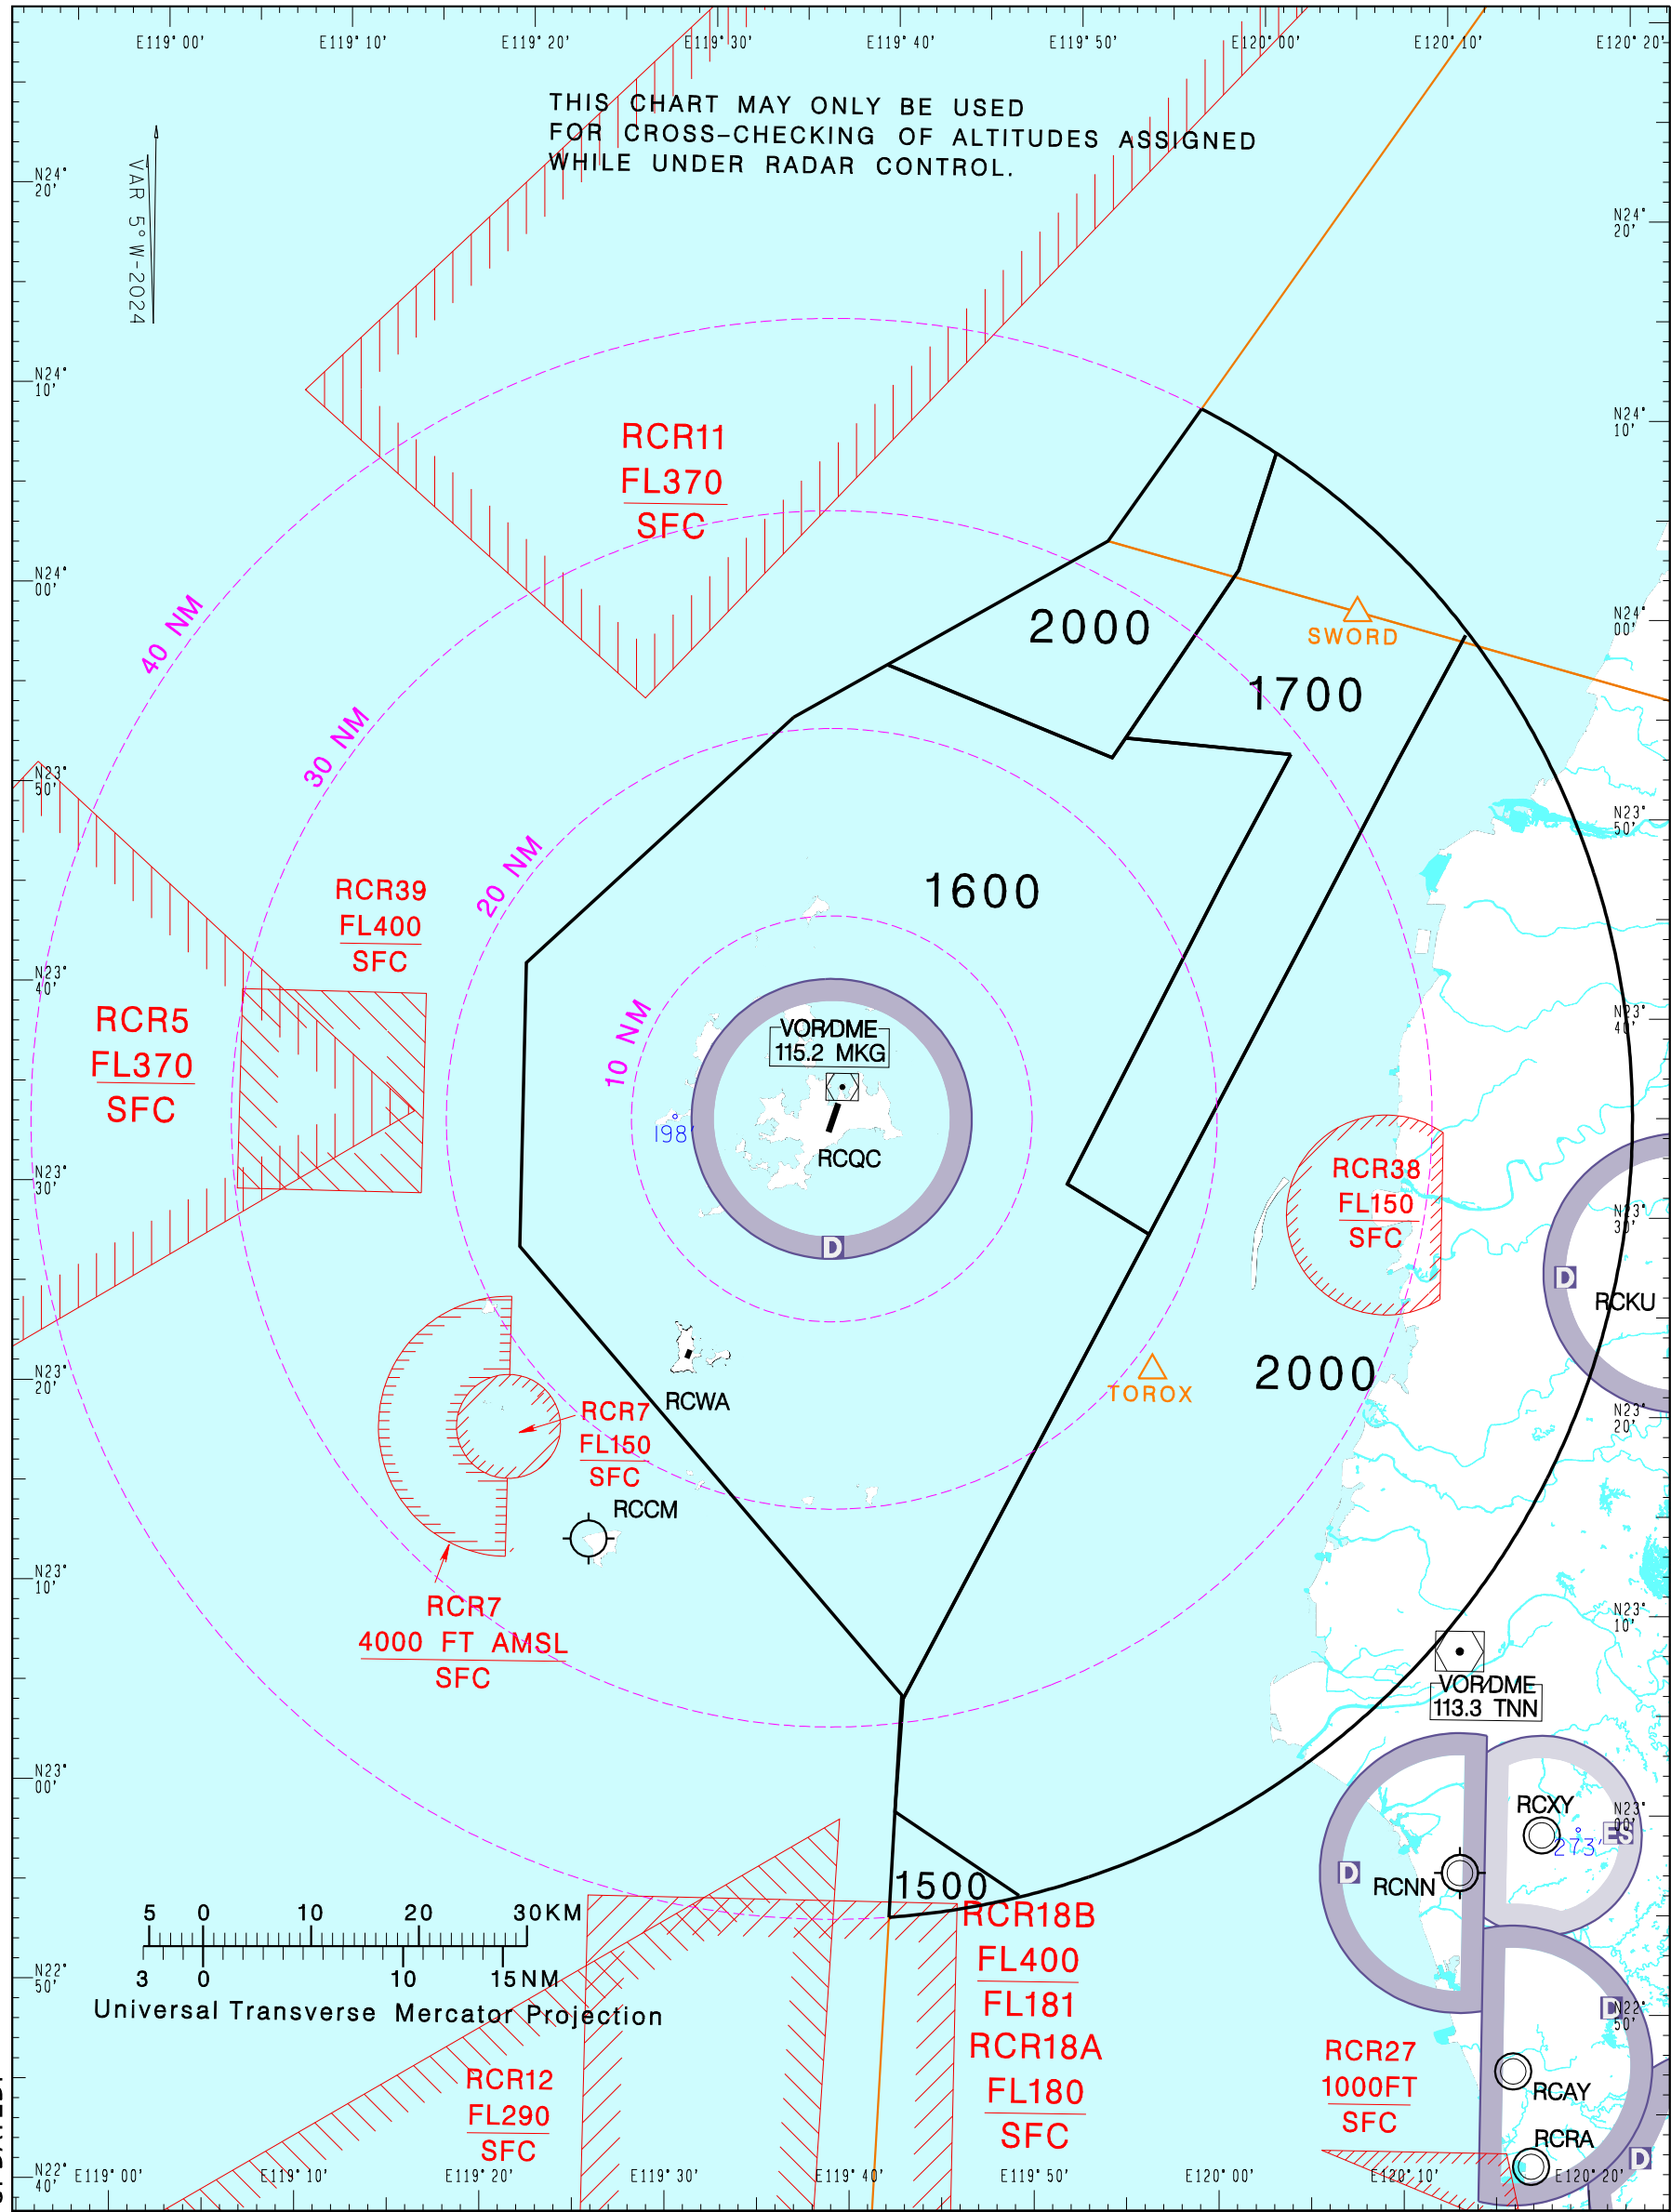

NOTE

- Distance circles are centred on the RCQC ARP (233407N 1193742E).
- Minimum altitudes are calculated taking into account of minimum clearance above terrain/obstacles.
Radar control service cannot be provided to aircraft below the applicable minimum.
Aircraft at designated altitude in relevant sector is not assured of radar contact.
- Altitudes, Levels and Heights are in feet.
- Only significant spot heights are shown.
- LOSS OF COMMUNICATION
 - SQUAWK 7600 immediately, and
 - follow AIP ENR 1.6.4 "Radio Communication Failure Procedures."

THIS PAGE
INTENTIONALLY
LEFT BLANK

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
07	073.94	1200 x 30	RWY: 650 PSI CONC SWY: NIL	102232.42N 1142138.26E 102243.30N 1142216.15E GUND: NIL	THR: 9 FT TDZ: NIL
25	253.94	1200 x 30	RWY: 650 PSI CONC SWY: NIL	102243.30N 1142216.15E 102232.42N 1142138.26E GUND: NIL	THR: 9 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
07	NIL	NIL	NIL	NIL	NIL
25	NIL	NIL	NIL	NIL	NIL
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
07	NIL	NIL	NIL		
25	NIL	NIL	NIL		

RCSP AD 2.13 公布距離

RCSP AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
07	1200	1200	1200	1200	NIL
25	1200	1200	1200	1200	NIL

RCSP AD 2.14 進場及跑道燈光設備

RCSP AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
07	NIL	NIL	NIL	NIL	NIL	NIL	NIL	NIL
25	NIL	NIL	NIL	NIL	NIL	NIL	NIL	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
07	NIL							
25	NIL							

RCSP AD 2.15 其他燈光設備及備用電源

RCSP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	NIL
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	NIL
4	備用電源 / 切換時間 Secondary power supply/switch-over time	NIL
5	備註 Remarks	NIL

RCSP AD 2.16 直昇機降落區

RCSP AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL

跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
10	+0.3%	51 x 60	NIL	2776 x 283	122 x 150
28	NIL	NIL	NIL	2776 x 283	51 x 150
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de-scription of ar-resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
10	THR 2716 M EMAS 122.2 M x 69.1 M	Available	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
28	NIL	NIL	跑道地帶寬度及 RESA 長度不符 Annex 14 之規定。 The width of strip and the length of RESA does not meet criteria in Annex 14.		

RCSS AD 2.13 公布距離

RCSS AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
10	2605	2605	2656	2605	NIL
28	2605	2605	2605	2605	NIL

交叉口起飛 INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
10	WH	1630	1630	1681	NIL
28	E1	1850	1850	1850	NIL
	EH	1400	1400	1400	NIL

RCSS AD 2.14 進場及跑道燈光設備

RCSS AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Designator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有無翼排燈 THR LGT colour WBAR	目視進場滑降指示燈 (最低眼高) PAPI VASIS (MEHT) PAPI	著陸區燈長度 TDZ, LGT LEN	跑道中心線燈總長度、間距、顏色、強度 RWY Centre Line LGT Length, spacing, colour, INTST	跑道邊燈總長度、間距、顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末端燈顏色、有無翼排燈 RWY End LGT colour WBAR	緩衝區燈長度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
10	SSALR 720 M LIH	Green WBAR	PAPI LEFT/3° (65.15 FT)	NIL	2605M, 30M, White, White/Red, Red LIH	2605M, 60M, White, Yellow, LIH	Red No WBAR	51M Red Uni-dir
28	RTIL White Uni-dir.	Green WBAR	PAPI LEFT/3° (64.5 FT)	NIL	2605M, 30M, White, White/Red, Red LIH	2605M, 60M, White, Yellow, LIH	Red No WBAR	NIL
跑道名稱 RWY Designator	備註 Remarks							
1	10							
10	NIL							
28	NIL							

RCSS AD 2.15 其他燈光設備及備用電源

RCSS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green, every 4 sec. HN or IMC when air traffic control services are provided.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: On each runway end. LGTD.
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light: Blue TWY centerline lights: TWY E, E1, EH, WH, W, N1 and CC RWY guard lights
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Within 1 sec: REDL, RENL, RTHL Within 15 sec: Other LGT
5	備註 Remarks	NIL

RCSS AD 2.16 直昇機降落區

8	輔助裝備 Supplementary equipment available for providing information	1. 氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw) 2. 都卜勒氣象雷達 Doppler Weather Radar
9	收受氣象資料之飛航服務單位 ATS units provided with information	臺北機場管制臺, 臺北近場管制塔臺, 桃園飛航諮詢臺 Taipei TWR, Taipei APP, Taoyuan FIS
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	因無適當儀器測量垂直風切及斜向能見度，故此等資料暫不測報。 Pending the availability of suitable equipment, vertical wind shear and slant visual range observations are not made.

RCTP AD 2.12 跑道場面特性

RCTP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
05L	049.08	3660 x 60	RWY: PCR 1040/F/C/X/T ASPH SWY: NIL	250422.42N 1211257.55E 250540.19N 1211436.39E GUND: 63 FT	THR: 74 FT TDZ: 74 FT
23R	229.08	3660 x 60	RWY: PCR 1040/F/C/X/T ASPH SWY: NIL	250540.19N 1211436.39E 250422.42N 1211257.55E GUND: 63 FT	THR: 63 FT TDZ: 63 FT
05R	049.07	3800 x 60	RWY: PCR 1360/F/C/X/U CONC+ASPH SWY: NIL	250341.15N 1211327.29E 250459.76N 1211507.18E GUND: 63 FT	THR: 107 FT TDZ: 107 FT
23L	229.07	3800 x 60	RWY: PCR 1360/F/C/X/U CONC+ASPH SWY: NIL	250452.33N 1211457.73E 250339.02N 1211324.59E GUND: 63 FT	THR: 96 FT TDZ: 97 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
05R	-0.09%	NIL	NIL	3920 x 300	240 x 150
23L	+0.09%	NIL	NIL	3920 x 300	240 x 150

跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
05L	-0.09%	NIL	NIL	3780 x 300	240 x 150
23R	+0.09%	NIL	NIL	3780 x 300	240 x 150
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
05R	NIL	Available	NIL		
23L	NIL	Available	NIL		
05L	NIL	Available	NIL		
23R	NIL	Available	NIL		

RCTP AD 2.13 公布距離

RCTP AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
05L	3660	3660	3660	3660	NIL
23R	3660	3660	3660	3660	NIL
05R	3800	3800	3800	3700	THR displaced by 100 M
23L	3800	3800	3800	3450	THR displaced by 350 M

交叉口起飛

INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
05L	N2	3474	3474	3474	NIL
23R	N10	3473	3473	3473	NIL
05R	S2	3700	3700	3700	NIL
	S3	3554	3554	3554	NIL
23L	S8	3028	3028	3028	NIL
	S9	3450	3450	3450	NIL

4	趨勢預報 發布間隔 Trend forecast Interval of issuance	NIL
5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	NIL
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	NIL
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	高雄機場管制臺, 高雄近場管制塔臺, 高雄飛航諮詢臺 Kaohsiung TWR, Kaohsiung APP, Kaohsiung FIS
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCWA AD 2.12 跑道場面特性

RCWA AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
02	021.02	822 x 23	RWY: PCR 290/R/D/W/T CONC SWY: NIL	232156.64N 1193007.74E 232221.58N 1193018.12E GUND: 57 FT	THR: 101 FT TDZ: NIL
20	201.02	822 x 23	RWY: PCR 290/R/D/W/T CONC SWY: NIL	232221.58N 1193018.12E 232156.64N 1193007.74E GUND: 57 FT	THR: 100 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
02	NIL	NIL	54 x 40	930 x 80	NIL
20	NIL	NIL	54 x 40	930 x 80	NIL

跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks
1	12	13	14
02	NIL	NIL	NIL
20	NIL	NIL	NIL

RCWA AD 2.13 公布距離

RCWA AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
02	822	876	822	822	NIL
20	822	876	822	822	NIL

RCWA AD 2.14 進場及跑道燈光設備

RCWA AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des- ignator	進場燈 型式、長 度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
02	RTIL Uni-dir. Flash FREQ 120/MIN	Green No WBAR	APAPI RIGHT/3° (36 FT)	NIL	NIL	822M, 60M, White, Yellow, LIH	Red No WBAR	NIL
20	RTIL Uni-dir. Flash FREQ 120/MIN	Green No WBAR	APAPI LEFT/3° (32 FT)	NIL	NIL	822M, 60M, White, Yellow, LIH	Red No WBAR	NIL

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標高、標示/障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
	Building 135FT	240002.34N 1213607.06E	
	Antenna 259FT	235824.07N 1213506.01E	
	Lightning rod 105FT	240005.71N 1213623.73E	
	Lightning rod 115FT	240006.56N 1213618.63E	
	Lightning rod 137FT	235944.38N 1213613.56E	
	Lightning rod 140FT	235941.89N 1213616.93E	
	Lightning rod 141FT	235942.36N 1213615.37E	
	Lightning rod 165FT	235935.12N 1213613.67E	
	Lightning rod 247FT	235817.23N 1213530.99E	
	Signboard 64FT	240042.02N 1213633.91E	

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCYU AD 2.11 氣象資訊之提供

RCYU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	花蓮空軍基地 Hualien Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	花蓮空軍基地 Hualien Air Base H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	NIL
5	簡報/諮詢方式 Briefing/consultation provided	Personal briefing and consultation, (closed circuit television)
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	PL, C (Charts, abbreviated plain language text) Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx chart, Upper level Wx chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)

9	收受氣象資料之飛航服務單位 ATS units provided with information	NIL
10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL

RCYU AD 2.12 跑道場面特性

RCYU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
03	026.32	2751 x 45	RWY: PCR 1040/R/D/W/T CONC SWY: NIL	240045.26N 1213639.38E 240205.41N 1213722.53E GUND: 69 FT	THR: 44 FT TDZ: 44 FT
21	206.29	2751 x 45	RWY: PCR 1040/R/D/W/T CONC SWY: NIL	240205.41N 1213722.53E 240045.26N 1213639.38E GUND: 69 FT	THR: 51 FT TDZ: NIL
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
03	-0.12%	NIL	NIL	2871 x 280	90 x 90
21	+0.12%	NIL	NIL	2871 x 280	90 x 90
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
03	THR 2779 M 61QSII ELEV 70 FT THR 2296 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks
1	12	13	14
21	THR 2802 M 61QSII ELEV 63 FT THR 2295 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.

RCYU AD 2.13 公布距離
RCYU AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
03	2751	2751	2751	2751	NIL
21	2751	2751	2751	2751	NIL

RCYU AD 2.14 進場及跑道燈光設備
RCYU AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des- ignator	進場燈 型式、長 度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
03	RTIL ALS 360M	Green No WBAR	PAPI LEFT/3° (57 FT)	NIL	NIL	2750M, 60M, White,Yellow	Red No WBAR	NIL
21	MALSF 420M LIM	Green No WBAR	PAPI 2.98° (57 FT)	NIL	NIL	2750M, 60M, White,Yellow	Red No WBAR	NIL
跑道名稱 RWY Des- ignator	備註 Remarks							
1	10							
03	NIL							

跑道名稱 RWY Designator	備註 Remarks
1	10
21	MALSF為中亮度進場燈光系統，配有順序閃光燈，屬FAA規範。 MALSF is FAA standard, equipped with sequenced flashing light.

RCYU AD 2.15 其他燈光設備及備用電源

RCYU AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置，特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green every 5 sec. HN or IMC.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: NIL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light: Blue RWY guard lights.
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Secondary power supply/15 sec.
5	備註 Remarks	NIL

RCYU AD 2.16 直昇機降落區

RCYU AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	NIL

RCYU AD 2.17 飛航服務空域

RCYU AD 2.17 ATS AIRSPACE