

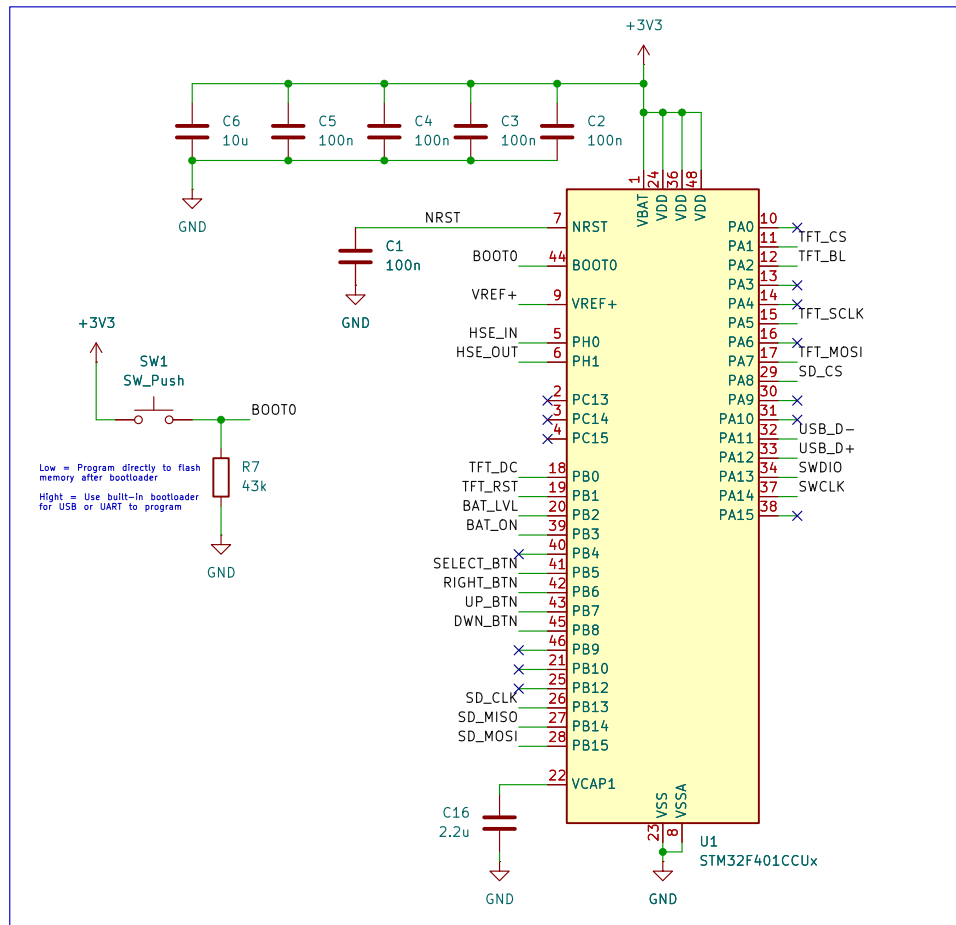



VDDA is connected internally to VREF+. See Fig 43 on datasheet.

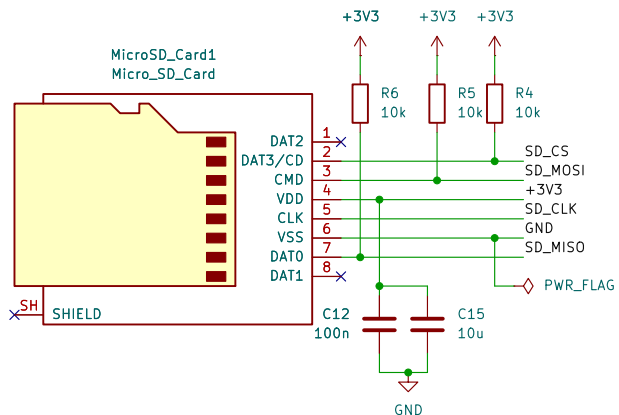

Using a 3225 SMD package.
Going bigger might be a better choice if soldering by iron!

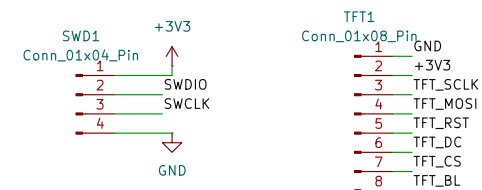

Slow SPI speed so no impedance matching
Or timing constraints are considered

Sheet: /
File: RVSP_Pocket.kicad_sch

Title:




Size: A4

Date:


KiCad E.D.A. 10.0.1

Rev:


Id: 1/2

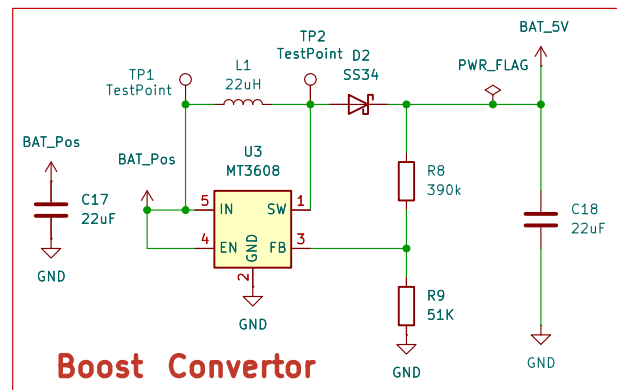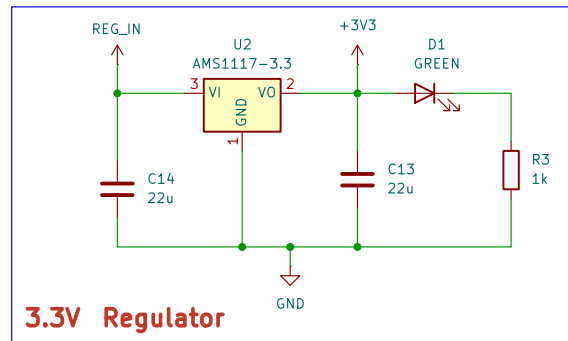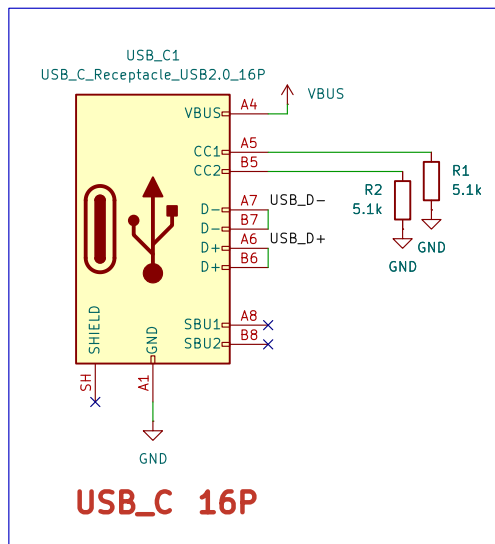

Note: The input voltage of REG_IN must be $\geq 1.2V$ than input
Otherwise the regulator cannot reliably produce 3.3V output
See regulator drop-out voltage

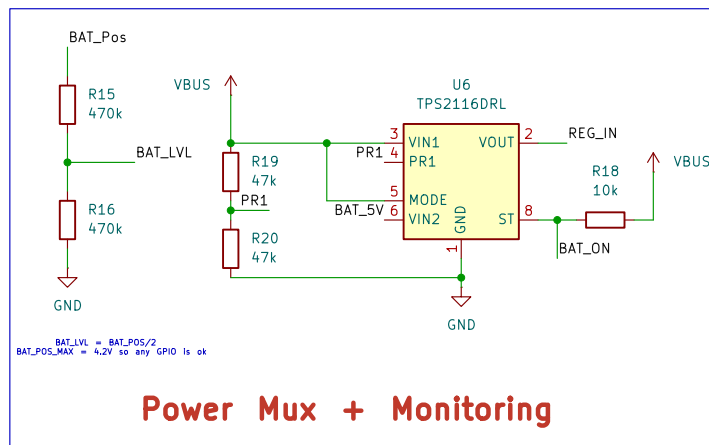


$BAT_LVL = BAT_POS/2$
 $BAT_POS_MAX = 4.2V$ so any GPIO is ok

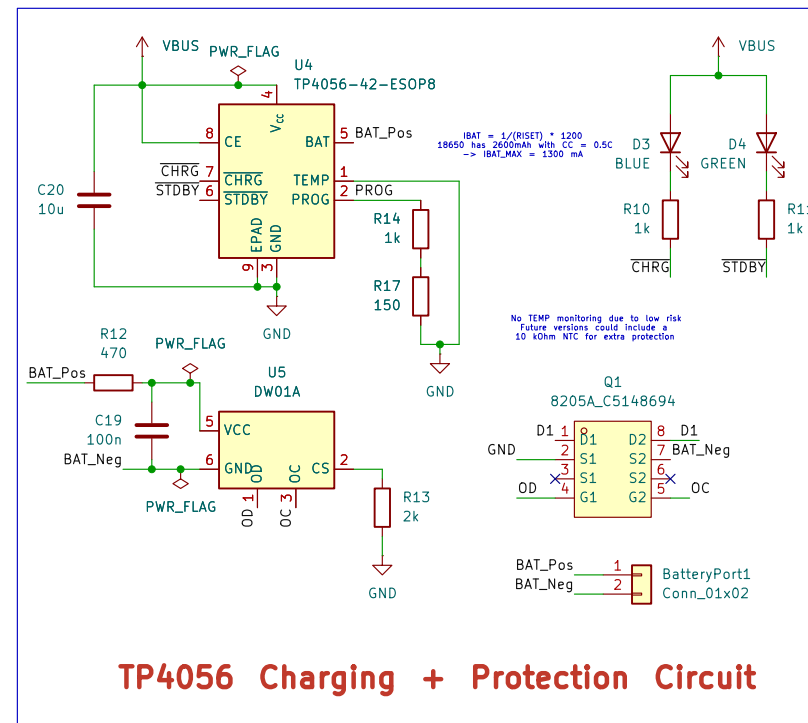

$$I_{BAT} = \frac{1}{(R_{ISET})} \times \frac{1200}{18650} \text{ has } 2600mAh \text{ with } CC = 0.5C$$

$$\rightarrow I_{BAT_MAX} = 1300 \text{ mA}$$

No TEMP monitoring due to low risk
Future versions could include a
10 kOhm NTC for extra protection

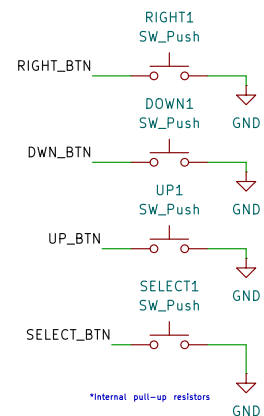

- H1 MountingHole
H2 MountingHole
H3 MountingHole
H4 MountingHole

Sheet: /
File: power.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 2/2