FIELD / 4

Nominal assembled envelope and wheel spacing

DIMENSIONED DESIGN VIEWS

REV B / TWO-PIECE BODY / MILLIMETRES

01 TOP VIEW

Orthographic nominal envelope / scale 1:2 on A3

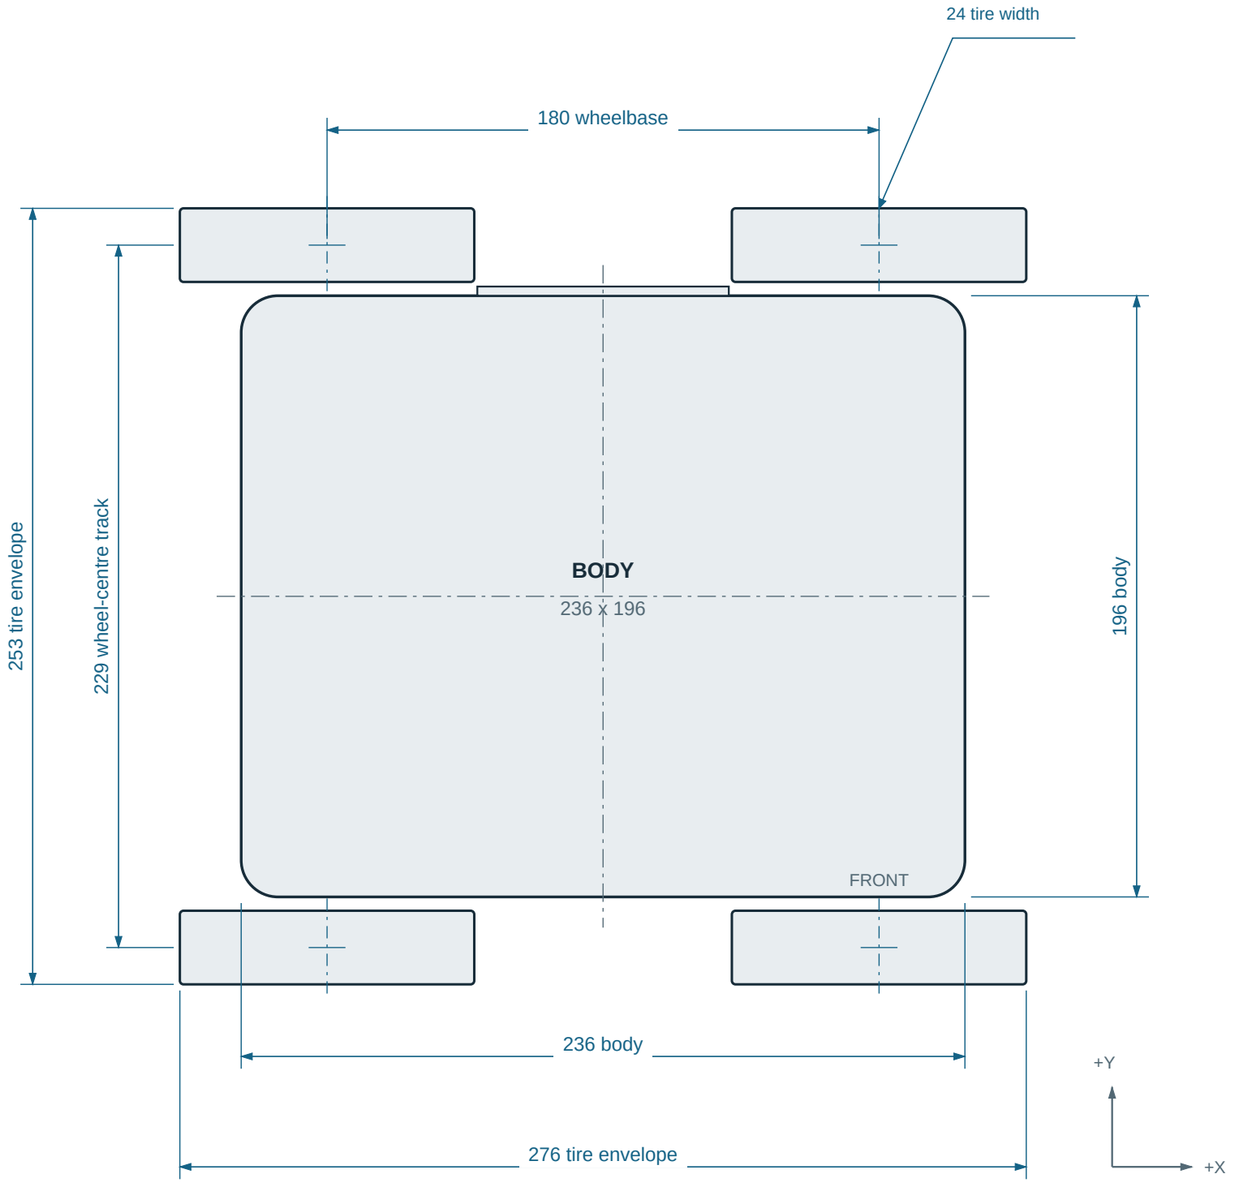

02 SIDE VIEW

Looking toward -Y / scale 1:2 on A3

NOMINAL ASSEMBLED SIZE

276 L x 253 W x 154.9 H

Height includes modeled lid screw heads; roof is 153.

No optional sensor or external cables included.

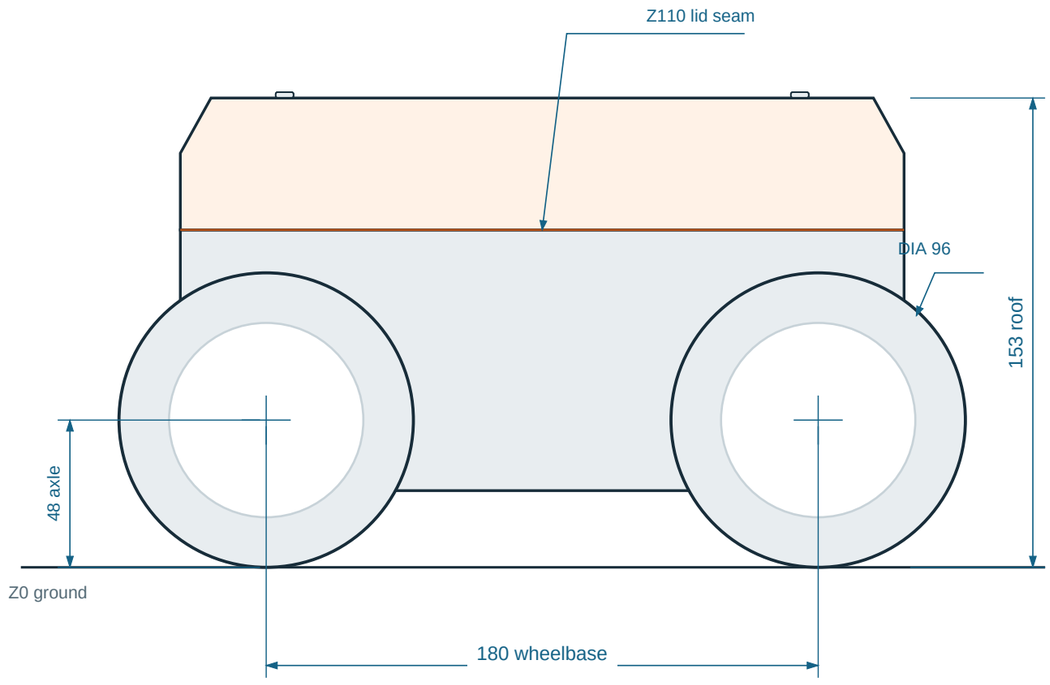

Body floor underside: Z25 | nominal clearance 25

Lowest fastener clearance: approximately 17.5

Lower shell + lid max XY: 236 x 196

P1S print XY, rotated 90 deg: 196 x 236; 6 mm brim: 208 x 248

+Y side panel projects 3 beyond the body; within tire envelope.

DESIGN STATUS

Purchased wheels and screw heads are nominal references. Tread shape, load compression and real hardware can change the assembled envelope.

These are assembly-layout drawings, not fabrication tolerances. Check the actual P1S profile, stock exclusion zone, and fit coupons before full prints.

FIELD / 4

Battery reserve and Raspberry Pi 4 mounting interface

DIMENSIONED DESIGN VIEWS

REV B / TWO-PIECE BODY / MILLIMETRES

03 BATTERY POCKET / RESERVE

Unverified pack allowance; measure the actual battery

TOP VIEW / scale 1:1 on A3

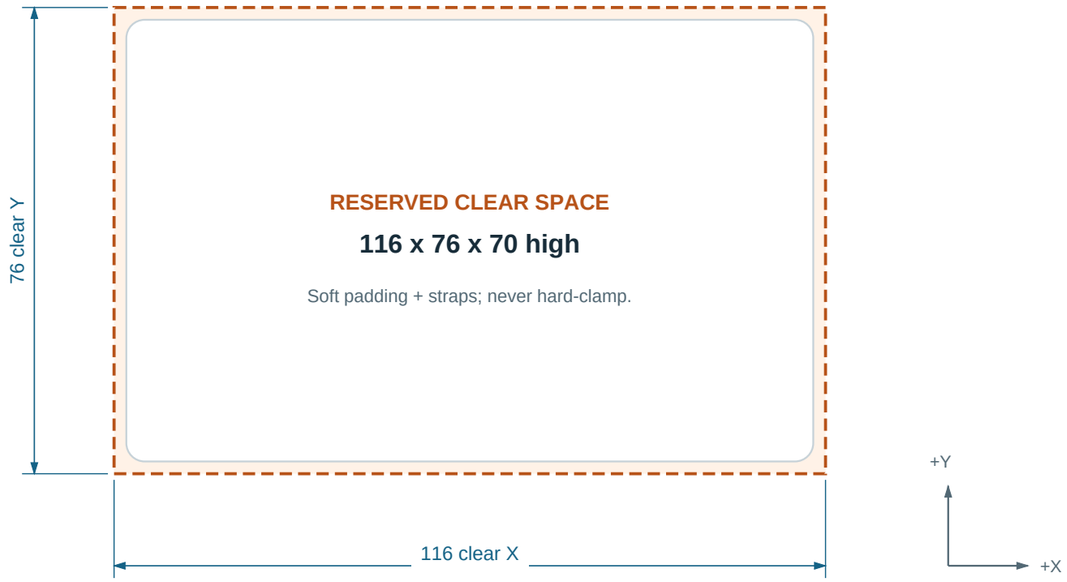

HEIGHT SECTION

Scale 1:2 on A3; no cable/connector fit implied

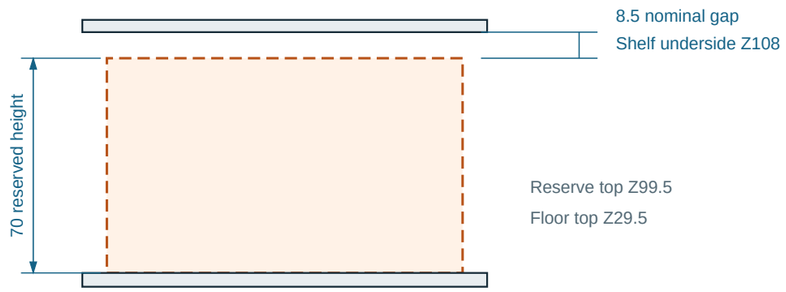

Connector exits, padding and strap thickness must be checked on the real pack.

Reserve is centered at world X0, Y0. Light outline is an illustrative battery only.

04 RASPBERRY PI 4 INTERFACE

Top view / scale 1:1 on A3 / all coordinates are world XY

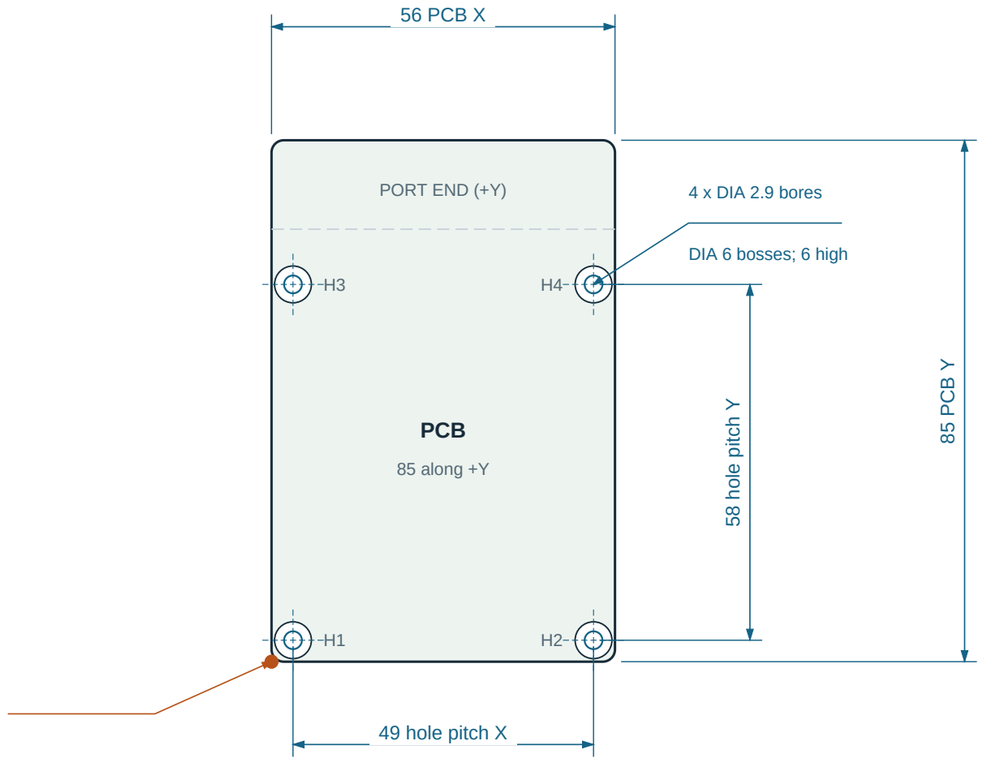

PCB origin (7, -15)

MOUNTING-HOLE CENTRES

Hole	World X	World Y	PCB-edge offsets (X, Y)
H1	10.5	-11.5	3.5, 3.5
H2	59.5	-11.5	52.5, 3.5
H3	10.5	46.5	3.5, 61.5
H4	59.5	46.5	52.5, 61.5

Seat top Z118; PCB thickness 1.6. Four M2.5 fasteners.

Pitch is 58 along Y x 49 along X. Boss bores are printed clearances.

Verify the actual board revision, screw length, plugs and cooler before assembly.

Axes: +X forward, +Y left, +Z up. Board origin is its lower-X/lower-Y corner.