

000224 Deep Red Opalescent

Family: Opalescent · Reference thickness: 2.0 mm

STRIKER Contains: **Selenium** **Sulfur**


May react with: **Copper** **Lead** **Silver**

Reflected Light



	R	G	B
RGB	67	14	14
HSB	0	79	26
η	26.3%	5.5%	5.5%

Transmitted Light

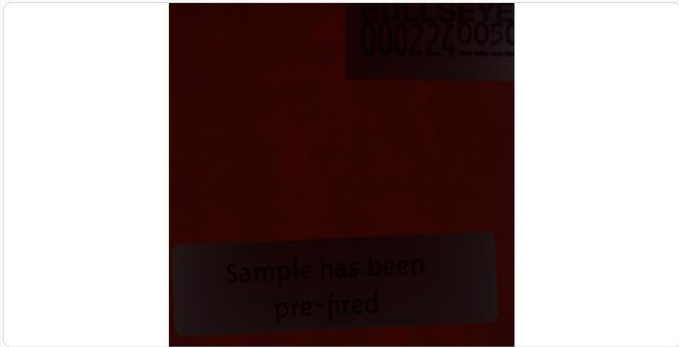


	R	G	B
RGB	47	5	0
HSB	6	100	18
η	18.4%	2.0%	0.0%


Optical Response Curves

Beer-Lambert extrapolation from reference measurement at 2.0 mm · range: 0 – 8.0 mm


Reflected Color Shift

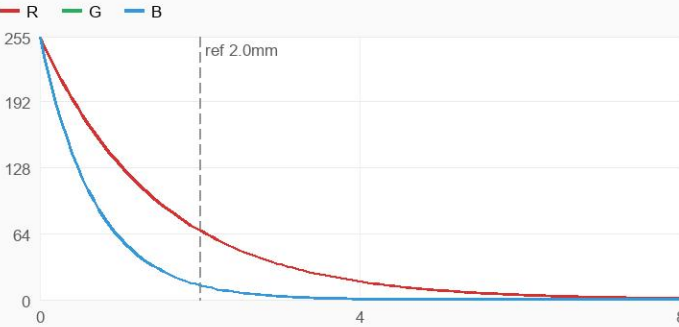


Reflected Brightness & Saturation

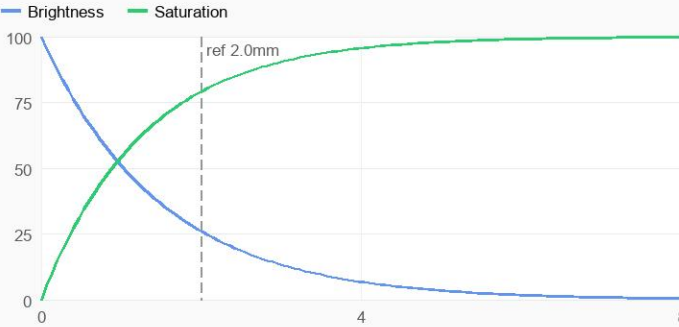

Transmitted Color Shift

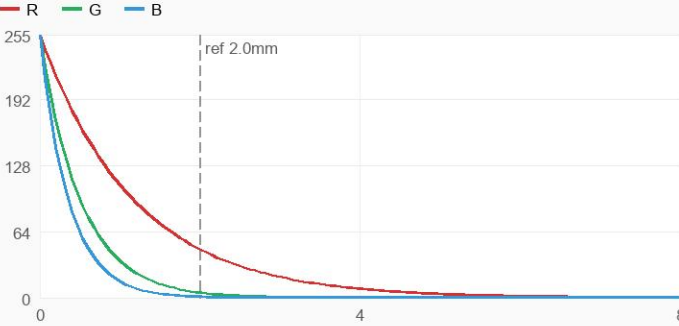

Transmitted Brightness & Saturation

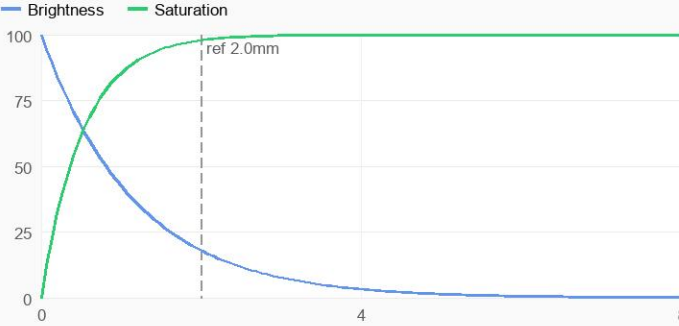

Cold Characteristics

Color may appear partly transparent and contain variation in color density.

Working Notes

Color may contain streaky variation.

This style is not suitable for kilncasting because it can become incompatible when held at high temperatures for an extended period. It may also become incompatible in instances where processes exceed the parameters of the test for compatibility. Testing recommended when heatwork exceeds these parameters.


000224 Deep Red Opalescent

Glass depth side view | Family: Opalescent | Reference thickness: 2.0 mm

Black point is calculated where all RGB channels attenuate to 1 or lower on the 0-255 scale using Beer-Lambert extrapolation from the reference measurement.

Reflected Light


Black point: 8.3 mm | threshold: RGB <= 1

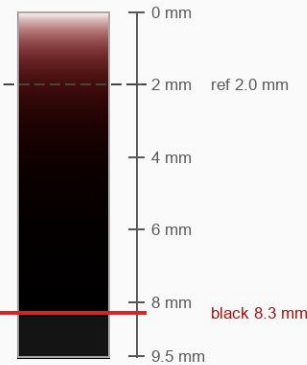

Depth	R	G	B	Color
0.0 mm	255	255	255	
2.0 mm	67	14	14	
8.3 mm	1	0	0	

Transmitted Light

Black point: 6.6 mm | threshold: RGB <= 1

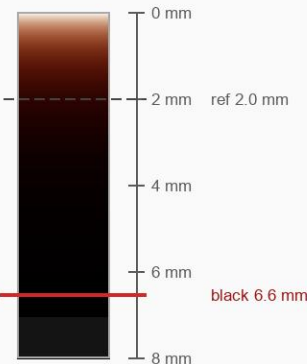

Depth	R	G	B	Color
0.0 mm	255	254	254	
2.0 mm	47	5	1	
6.6 mm	1	0	0	