Technical Data Sheet
ARYAPEEL –AG413

ARYAFILM

ARYAPEEL AG413 - One side Heat sealable Peelable with Antifog property other side Chemically Coated Polyester film suitable for lidding applications. Heat sealable layer designed to give Seal & Peel with PP, APET, CPET, PETG, PVC, HDPE & PS. It is recommended for Non oily food items.

Sr.No.	Properties			Unit	Test Method	Typical Values			
General									
1	Thickness			Micron (Gauge)	JBF Method	14 (56)	21 (84)	25 (100)	38 (144)
2	Yield			M^2/Kg	JBF Method	51.02	34.01	28.5	18.79
Mechanical									
1	Tensile Strength at break		MD	Kg/cm^2 (Kpsi)	ASTM D 882	2100 (29.8)	2000 (28.4)	2000 (28.4)	2000 (28.4)
			TD			2200 (31.2)	2100 (29.8)	2100 (29.8)	2100 (29.8)
2	Elongation at break		MD	%	ASTM D 882	130	130	130	130
			TD			120	120	120	120
3	Co-efficient of friction		Static	--	ASTM D 1894	0.90	0.90	0.90	0.90
			Dynamic			0.80	0.80	0.80	0.80
4	Heat Seal Strength	180^0C, 1 S & 420 N	APET	gm/25mm	JBF Method	800	800	800	800
			PVC			800	800	800	800
			PS			800	800	800	800
			PP			800	800	800	800
			HDPE			800	800	800	800
			Seal to Seal			450	450	450	450
Optical									
1	Haze			%	ASTM D 1003	12	12	12	12
Thermal									
1	Shrinkage @150^0 C/30'		MD	%	ASTM D 1204	2.2	2.0	2.0	2.0
			TD			0.4	0.4	0.4	0.4
2	Anti fog Test (Hot & Cold)				JBF Method	Pass	Pass	Pass	Pass

Heat Seal Strength Profile

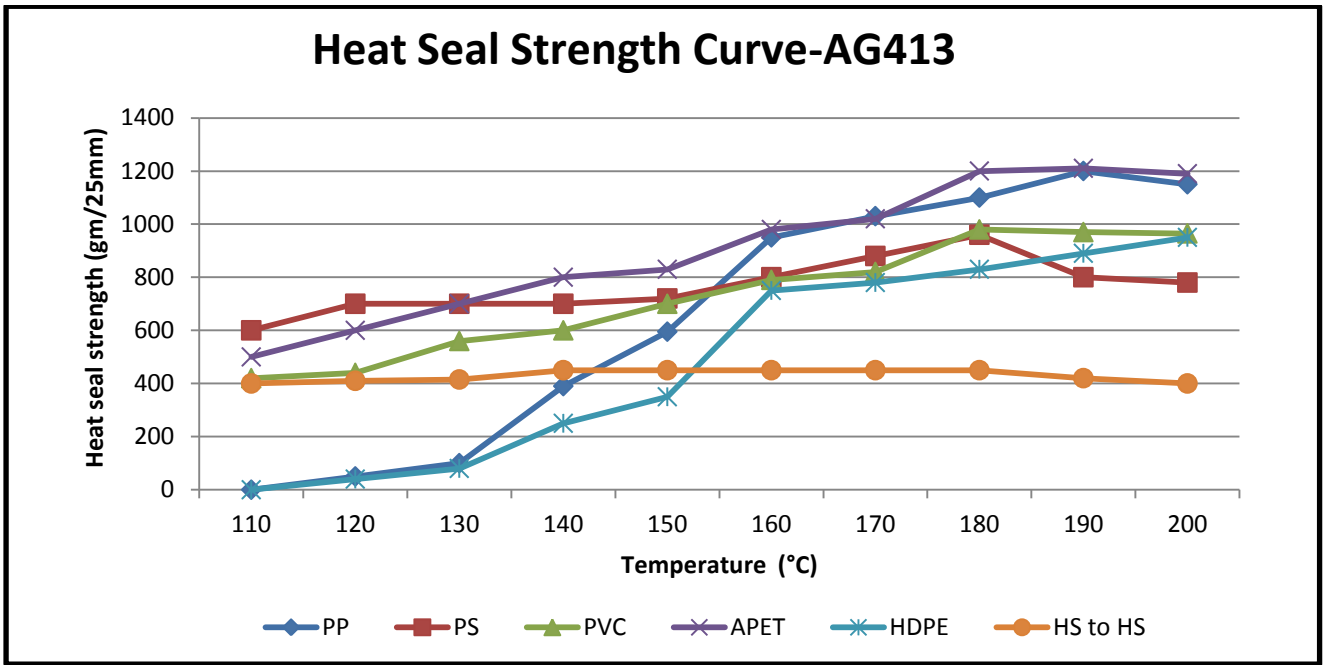

Sealing condition: Sealed at 420 N, 1 second.

MD = Machine Direction, TD = Transverse Direction

Storage & Handling: ARYAFILM need to be stocked in a closed warehouse & should not be exposed to direct sun light or light sources. Avoid extreme of humidity and heat. It is recommended to store below 40°C in dry places in original packing.
Food Contact: ARYAFILM complies with EC (EU 202/2014 & EU 10/2011) and FDA (21 CFR § 175.105 & 21 CFR § 175.300) regulations on packaging for direct contact with foodstuffs. Specific document and MSDS are available on request.
Disclaimer: The information given above is to the best of our knowledge and experience. Some of the properties can be changed as a result of suppliers' efforts to improve upon the quality or production efficiency of the subject. The information is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. **JBF** makes no warranty, express or implied, as to the fitness of the product for any specific use or purpose. The above data is purely for readers' consideration, investigation and verification and should be read in conjunction with the conditions for sale or contract