CTOS

CPP transparent film, one side heat sealable, other side treated

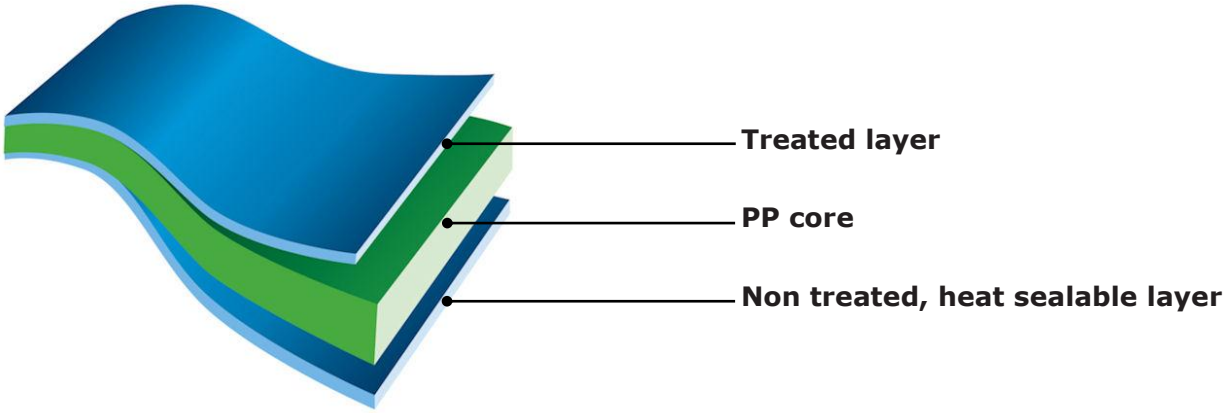

PROPERTIES

- Good clarity and gloss
- Treated surface is receptive to inks and adhesives
- Excellent machinability on packaging line

TYPICAL APPLICATIONS

- Lamination and single ply applications
- Direct food packaging (e.g. bread and bakery products, etc.)
- Jumbo packs (e.g. snack food, diapers, etc.)
- Textile wrapping; Flower wrapping
- Board lamination (lamination of stationery items, documents and playing cards)

ROLL SIZE AVAILABILITY*

Film	Standard Length (m)	4x (m)	6x (m)
CTOS 25	2,550	10,200	15,300
CTOS 30	2,100	8,400	12,600
CTOS 35	1,800	7,200	10,800
CTOS 40	1,600	6,400	9,600
CTOS 45	1,400	5,600	8,400
CTOS 50	1,300	5,200	7,800
CTOS 60	1,050	4,200	6,300

Outside diameter – core 76 mm	305 mm	588 mm	716 mm
Outside diameter - core 152 mm	337 mm	605 mm	730 mm

*Regional availability of roll sizes (multiples of standard length)-please refer to the corresponding Sales Representative

CTOS

Properties	Method	Unit	Ref.	Typical values						
Nominal thickness	Internal method	µm		25	30	35	40	45	50	60
Unit weight		g/m^2		22.8	27.3	31.9	36.4	41.1	45.5	54.6
Yield		m^2/kg		44.0	36.6	31.4	27.5	24.3	22.0	18.3
Tensile strength	ASTM D882	N/mm^2	MD TD	55 30						
Elongation at break		%	MD TD	520 725						
Haze	ASTM D1003	%		3.5		4.0				
Gloss (45°)	ASTM D2457	Gloss Unit		82		80				
Dynamic cof	ASTM D1894		NT/NT	0.30						
Thermal shrinkage	Internal method (130°C , 5 mins)	%	MD TD	1.0 2.0						
Heat seal range	Internal method	°C	NT/NT	122 - 140						
Seal strength	Internal method 130°C ;0.5 s	g/cm	NT/NT	500						
Treatment level	ASTM D2578	mN/m		38						
Water vapour permeability	ASTM F1249 (38°C - 90% RH)	$g/m^2/d$		9.0			8.5			

Tolerance		
Weight	≤ 1.000 kg	± 20%
	1.001-10.000 kg	± 10%
	> 10.000 kg	± 5%

STORAGE, HANDLING AND APPLICATION

CTOS film does not require special storage conditions. A storage temperature between 20°C to 30°C is recommended in order to minimise the deterioration of the level of surface treatment. In line refreshment of corona treatment is strongly recommended before processing of the material. It is advisable the inventory turnover according to the delivery dates. The film should be conditioned at room temperature for at least 24 hours before use. In line refreshment of corona treatment is recommended before processing the film. CTOS is suitable for use up to 3 months from date of production.

INDICATION OF SURFACE TREATMENT

CTOS film is normally supplied on outside surface (TO).

CTOS film can also be supplied with treatment on inside surface (TI). This must be agreed with our sales representative before processing the order.

FOOD CONTACT

The film complies with EU and FDA regulations. Specific document and MSDS are available upon request.

The property values represented in the table do not constitute product specifications, but represent the average or typical values. Use of this information is limited to the specific recipient. While the information is accurate to the best of our knowledge as of the date compiled, it is limited to the information as specified. No representation or warranty, expressed or implied, is made regarding the information, or its completeness or fitness to a particular use. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information. Ti does not guarantee the typical (or other) values.