HF101

Heat Sealable High Slip Film

Gulf Pack
TRANSPARENT BOPP FILM

DESCRIPTION:
Gulf Pack HF101 is a heat sealable film, specially designed with high slip and low antistatic properties to offer superior machinability.

PRODUCT FEATURES:
Good slip and low antistatic property
Superior machinability
Good optical and mechanical properties
Good resistance to oils, fats & chemicals
Good barrier to moisture, odors & gases

APPLICATIONS:
Rotogravure and flexographic (non-UV and Non-water base) printing
Lamination
Single web structure
HFFS & VFFS packaging

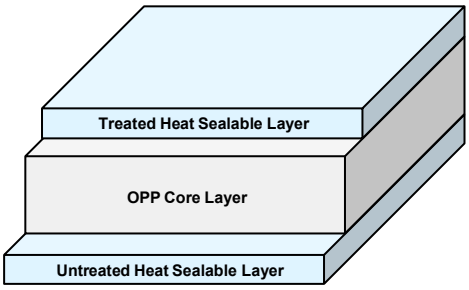

PROPERTIES			UNIT	TYPICAL VALUES									TEST METHOD.
PHYSICAL	Thickness		Microns	15	17	20	23	25	30	35	40	50	ASTM D 374
			Gauge	*60*	*68*	*80*	*92*	*100*	*120*	*140*	*160*	*200*	
	Grammage		g/m²	13.65	15.47	18.20	20.93	22.75	27.30	31.85	36.40	45.50	*GPIM
			lbs/ream	*8.39*	*9.50*	*11.18*	*12.86*	*13.98*	*16.77*	*19.57*	*22.36*	*27.96*	
	Yield		m²/kg	73.26	64.64	54.95	47.78	43.96	36.63	31.40	27.47	21.98	
			in²/lb	*51,507*	*45,447*	*38,630*	*33,591*	*30,904*	*25,753*	*22,074*	*19,315*	*15,452*	
	Coefficient of Friction (Film/Film)			0.25									ASTM D 1894
	Surface Tension (Treated Side)		dynes/cm	38									ASTM D 2578
OPTICAL	Haze		%	2.5									ASTM D 1003
	Gloss (45°)			85									ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	kg/mm²	15									ASTM D 882
		*TD		28									
		MD	*psi*	21,330									
		TD		39,816									
	Elongation at Break	MD	%	170									ASTM D 882
		TD		50									
	Modulus of Elasticity	MD	kg/mm²	194									ASTM D 882
		TD		360									
		MD	*psi*	275,868									
		TD		511,920									
THERMAL	Thermal Shrinkage	MD	%	< 4.0									GPIM (120oC (248oF), 5 min, air)
		TD		< 2.0									
	Heat Seal Range		°C *(°F)*	105 – 140 (221 – 284)									GPIM
	Heat Seal Strength (Film/Film)		g/15mm	275									GPIM (130oC, 1bar, 1sec)
			lb/0.59in	0.60									GPIM (266oF, 14.5psi, 1 sec)
BARRIER	Water Vapor Permeability (W.V.T.R.)		g/m²/24h	7.8	7.5	7	6	5.5	4.5	4	3	2.9	ASTM F 1249 (38°C / 90% RH)
			g/100in²/24h	*0.49*	*0.48*	*0.45*	*0.4*	*0.36*	*0.29*	*0.26*	*0.19*	0.18	
	Oxygen Transmission Rate (O.T.R.)		cc/m²/24h	2580	2510	2140	2000	1468	1290	1155	962	955	ASTM D 3985 (23°C / 0% RH)
			cc/in²/24h	*175*	*160*	*140*	*115*	*95*	*80*	*75*	*60*	55	

* GPIM – Gulf Pack Internal Method *MD – Machine Direction *TD – Transverse Direction

Gulf Pack HF101 films comply with EU Regulation 10/2011/EC and USA FDA Code of Federal Regulations CFR21 section 177.1520 (c) 1.1 and are suitable for use in packaging, carrying and transporting foodstuffs.

The information contained in this technical leaflet illustrates typical values only and are to the best of our knowledge. Since the conditions under which our films may be used are beyond our control, such values are declared without warranty or guarantee.

Bi-axially oriented polypropylene films age with time and will exhibit deterioration of some properties if not stored in a suitable environment at a temperature 30°C or below. We strongly advise our customers to use recommended storage conditions and consume products before 6 months from date of production in our plant.

Gulf Pack HF101 standard surface treatment location is on the outer side (**O**); other treatment preference can be arranged upon agreement with the sales representative before order processing.

Detailed advice regarding other specific applications of **Gulf Pack HF101** and other films in the Gulf Pack range is available upon request.