GulfPack

Technical Data Sheet

HF101

BOPP Transparent film, both sides Heat Sealable, one side treated

Film Structure

Treated Heat Sealable Layer

OPP Core Layer

Untreated Heat Sealable Layer
(SIT 105°C)

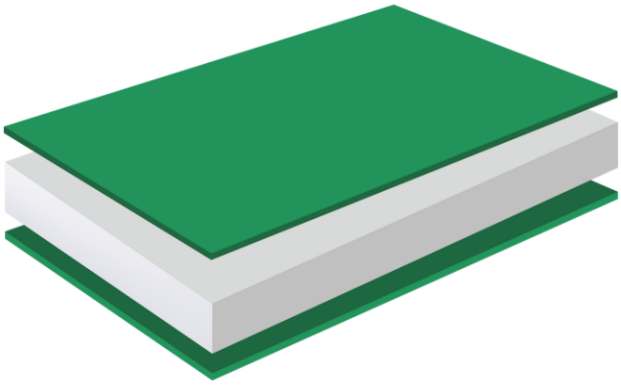

Key Features

- Good slip and low antistatic propertices
- Good optical and mechanical properties
- Both side heat sealable

Applications

- Rotogravure and Flexographic printing
- Lamination
- Single web structure
- HFFS & VFFS packaging
- General wrapping

Why choose GulfPack?

Good Printing
High-quality image in printing

Good bond
Good adhesion with inks & adhesives

Good Machinability
Good runnability in high-performance operations

Good sealing
Good performance in Fin and Lap seal application

Food Contact

HF101 film complies with applicable EC and FDA food contact regulations and is suitable for use in the packaging, handling, and transportation of foodstuffs. Regulatory compliance documents and the Safety Information Sheet (MSDS) are available upon request.

Treatment Indication

HF101 film is usually supplied with treatment on the outside surface **(O)**; other treatment preference can be arranged upon agreement with a sales representative prior to order processing.

GulfPack

Technical Data Sheet

HF101

PROPERTIES			UNIT	TYPICAL VALUES									TEST METHOD
PHYSICAL	Thickness		Micron	15	18	20	25	30	35	40	45	50	ASTM F 2251
			Gauge	60	72	80	100	120	140	160	180	200	
	Grammage		g/m^2	13.7	16.4	18.2	22.8	27.3	31.9	36.4	41.0	45.5	*GPIM
			lb/ream	8.4	10.1	11.2	14.0	16.8	19.6	22.4	25.2	28.0	
	Yield		m^2/kg	73.3	61.1	55.0	44.0	36.6	31.4	27.5	24.4	22.0	
			in^2/lb	51,507	42,922	38,630	30,904	25,753	22,074	19,315	17,169	15,452	
	Coefficient of Friction (*UT/UT)			0.25									ASTM D 1894
	Treatment level (Treated side)		dynes/cm	38									ASTM D 2578
OPTICAL	Haze		%	2.5									ASTM D 1003
	Gloss (45°)			85									ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	kg/mm^2	15									ASTM D 882
		*TD		28									
		MD	psi	21,330									
		TD		39,816									
	Elongation at Break	MD	%	170									ASTM D 882
		TD		50									
	Modulus of Elasticity	MD	N/mm^2	1940									ASTM D 882
		TD		3600									
		MD	psi	275,868									
		TD		511,920									
THERMAL	Thermal Shrinkage	MD	%	4									GPIM 120°C/ 248°F, 5 min, air
		TD		2									
	Heat Seal Range (UT/UT)		°C	105 – 140									GPIM 1bar, 1sec
			(°F)	221 – 284									
	Heat Seal Strength (UT/UT)		g/25mm	400									GPIM 130°C, 1bar,1sec
			lb/in	0.90									GPIM 266°F,14.5psi,1sec
BARRIER	Water Vapor Transmission Rate		$g/m^2/24h$	7.8	7.5	7.0	6.0	5.5	4.5	4.0	3.0	2.9	ASTM F 1249 38°C/ 90% RH
			$g/100in^2/24h$	0.50	0.48	0.45	0.40	0.36	0.29	0.26	0.19	0.18	
	Oxygen Transmission Rate		$cc/m^2/24h$	2580	2510	2140	2000	1468	1290	1155	962	955	ASTM D 3985 23°C/ 0% RH
			$cc/in^2/24h$	175	160	140	115	95	80	75	60	55	

*GPIM – GulfPack Internal Method *MD – Machine Direction *TD – Transverse Direction *UT – Untreated side

Storage & Handling

Bi-axially oriented polypropylene (BOPP) films may age over time and can exhibit deterioration in certain properties if not stored under appropriate conditions. We strongly recommend storing the film in its original packaging at temperatures below 30°C.The film should be conditioned to the operating environment for at least 24 hours prior to processing.

Customers are advised to follow the recommended storage conditions and use the products on a First-In, First-Out (FIFO) basis within 6 months from the date of production.

Disclaimer

The values in this leaflet are typical and provided to the best of our knowledge, without warranty or guarantee. As application conditions are beyond our control, it is the customer's responsibility to ensure safe, lawful, and suitable use. Users must conduct their own testing to confirm product compatibility and performance.