Technical Data Sheet

HF504

BOPP Metallized film, Heat Sealable

Film Structure

Metallized Surface

Metal Receptive Layer

OPP Core Layer

Untreated Heat Sealable Layer
(SIT 105°C)

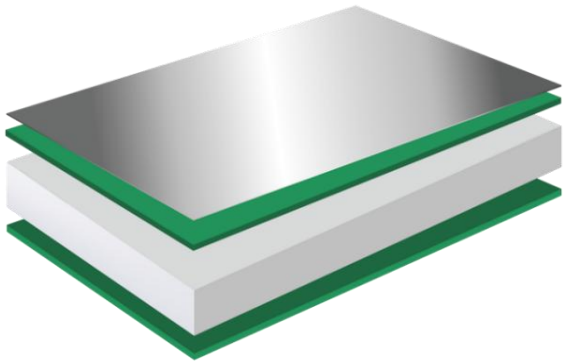

Key Features

- Good metal adhesion
- Good barrier to Moisture, Gas & Light
- Good seal strength on non-metallized side
- Good mechanical properties

Applications

- Rotogravure and Flexographic printing
- Adhesive lamination as an inner layer
- Single web application
- HFFS and VFFS packaging

Why choose GulfPack?

Good Barrier
Good Protection from Moisture Gas & Light

Good Metal Adhesion
Good Bond Strength after lamination

Good sealing
Performs well in fin seal & in lap seal after lamination

Good Appearance
Glossy Metal appearance

Food Contact

HF504 film complies with applicable EC and FDA food contact regulations and is suitable for use in the packaging, handling, and transportation of foodstuffs. Regulatory compliance documents and the Safety Information Sheet (MSDS) are available upon request.

Treatment Indication

HF504 film is usually supplied with treatment on the outside surface **(O)** , meaning the aluminum side is outward. Alternative treatment configurations can be arranged upon agreement with a sales representative prior to order processing.

Technical Data Sheet

HF504

PROPERTIES			UNIT	TYPICAL VALUES					TEST METHOD
PHYSICAL	Thickness		Micron	15	18	20	25	30	ASTM F 2251
			Gauges	60	72	80	100	120	
	Grammage		g/m^2	13.7	16.4	18.2	22.8	27.3	*GPIM
			lb/ream	8.4	10.1	11.2	14.0	16.8	
	Yield		m^2/kg	73.3	61.1	55.0	44.0	36.6	
			in^2/lb	51,507	42,922	38,630	30,904	25,753	
	Coefficient of Friction (*UT/UT)			0.35					ASTM D 1894
	Treatment level (Treated Side)		dynes/cm	38					ASTM D 2578
OPTICAL	Optical Density		%	2.0					GPIM
MECHANICAL	Tensile Strength at Break	*MD	kg/mm^2	15					ASTM D 882
		*TD		28					
		MD	psi	21,335					
		TD		39,825					
	Elongation at Break	MD	%	180					
		TD		50					
	Modulus of Elasticity	MD	N/mm^2	1850					
		TD		3500					
		MD	psi	275,800					
		TD		511,900					
THERMAL	Thermal Shrinkage	MD	%	4					GPIM (120oC /248oF), 5 min, air
		TD		1					
	Heat Seal Range (UT/UT)		C° (°F)	105–140 (221–284)					GPIM
	Heat Seal Strength (UT/UT)		g/25mm	400					GPIM 130oC, 1bar, 1sec
			lb/in	0.90					GPIM 266oF, 14.5psi, 1 sec
BARRIER	Water Vapor Transmission Rate		$g/m^2/24h$	0.50					ASTM F 1249 38°C / 90% RH
			$g/100in^2/24h$	0.032					
	Oxygen Transmission Rate		$cc/m^2/24h$	80					ASTM D 3985 23°C / 0% RH
			$cc/in^2/24h$	5.16					

*GPIM – GulfPack Internal Method *MD – Machine Direction *TD – Transverse Direction *UT – Untreated side

Storage & Handling

Bi-axially oriented polypropylene (BOPP) films may age over time and can exhibit deterioration in certain properties if not stored under appropriate conditions. We strongly recommend storing the film in its original packaging at temperatures below 30°C.The film should be conditioned to the operating environment for at least 24 hours prior to processing. Customers are advised to follow the recommended storage conditions and use the products on a First-In, First-Out (FIFO) basis within 6 months from the date of production.

Converting recommendations

Online refreshment of the metallized surface using inline corona treatment is strongly recommended prior to processing. An appropriate primer should also be used when printing on the metallized surface to ensure proper ink adhesion.

Disclaimer

The values in this leaflet are typical and provided to the best of our knowledge, without warranty or guarantee. As application conditions are beyond our control, it is the customer's responsibility to ensure safe, lawful, and suitable use. Users must conduct their own testing to confirm product compatibility and performance.