Technical Data Sheet

LW100

BOPP Transparent film, Roll Fed Label, one side treated

Film Structure

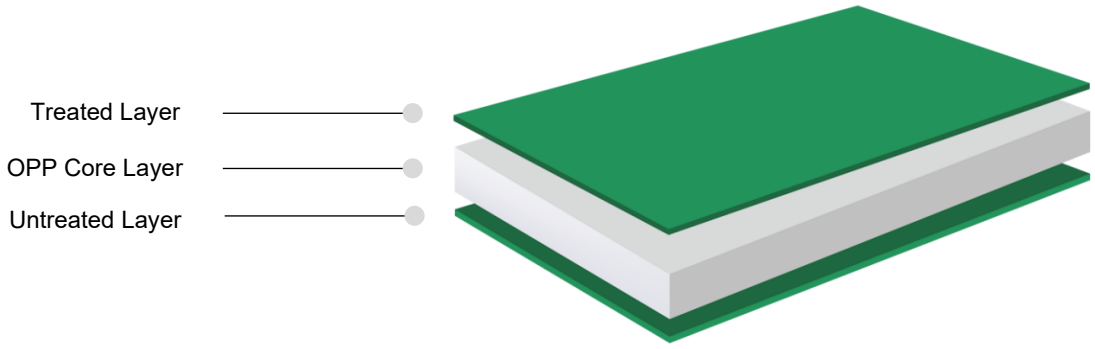

Key Features

- High transparency and glossy
- Good mechanical properties
- Treated side suitable for printing and coating
- Excellent adhesion with glue and inks
- Good machinability

Applications

- Labels for bottling products
- Rotogravure and flexographic (non-UV) printing

Why choose GulfPack?

Robustness
Excellent strength, stiffness and stability for Mono- layer process

High Optical Clarity
Exceptional clarity and gloss for standout label appeal

Controlled static
Low static for high- speed labelling process

Good Printability
Supports high-definition reproduction in rotogravure and flexo printing

Food Contact

LW100 film complies with applicable EC and FDA food contact regulations and is suitable for use in the packaging, handling, and transportation of foodstuffs. Regulatory compliance documents and the Safety Information Sheet (MSDS) are available upon request.

Treatment

LW100 film is usually supplied with treatment on the outside surface **(O)**; other treatment preference can be arranged upon agreement with a sales representative prior to order processing.

Technical Data Sheet

LW100

PROPERTIES			UNIT	TYPICAL VALUES									TEST METHOD
PHYSICAL	Thickness		Microns	12	15	18	20	30	33	35	38	40	ASTM F 2251
			Gauge	48	60	72	80	120	132	140	152	160	
	Grammage		g/m^2	11.0	13.65	16.38	18.2	27.30	30.03	31.90	34.60	36.40	*GPIM
			lbs/ream	6.8	8.43	10.10	11.18	16.8	18.5	19.6	21.2	22.4	
	Yield		m^2/kg	90.90	73.26	61.05	54.95	36.63	33.30	31.40	28.92	27.48	
			in^2/lb	64,515	51.565	43,000	38,630	25,800	23,500	22,100	20,400	19,400	
	Coefficient of Friction (*UT/UT)			0.35									ASTM D 1894
	Treatment level (Treated Side)		dynes/cm	38									ASTM D 2578
OPTICAL	Haze		%	1.5									ASTM D 1003
	Gloss (45°)			95									ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	kg/mm^2	15									ASTM D 882
		*TD		28									
		MD	psi	21,335									
		TD		39,825									
	Elongation at Break	MD	%	180									ASTM D 882
		TD		50									
	Modulus of Elasticity	MD	N/mm^2	2100									ASTM D 882
		TD		3800									
		MD	psi	298,620									
		TD		540,360									
THERMAL	Thermal Shrinkage	MD	%	4									GPIM (120ºC (248ºF), 5 min, air)
		TD		2									

* GPIM – GulfPack Internal Method *MD – Machine Direction *TD – Transverse Direction *UT – Untreated side

Storage & Handling

Bi-axially oriented polypropylene (BOPP) films may age over time and can exhibit deterioration in certain properties if not stored under appropriate conditions. We strongly recommend storing the film in its original packaging at temperatures below 30°C.The film should be conditioned to the operating environment for at least 24 hours prior to processing.
Customers are advised to follow the recommended storage conditions and use the products on a First-In, First-Out (FIFO) basis within 6 months from the date of production.

Disclaimer

The values in this leaflet are typical and provided to the best of our knowledge, without warranty or guarantee. As application conditions are beyond our control, it is the customer's responsibility to ensure safe, lawful, and suitable use. Users must conduct their own testing to confirm product compatibility and performance.