Technical Data Sheet

LW315

BOPP White Voided film, Roll Fed Label, one side treated

Film Structure

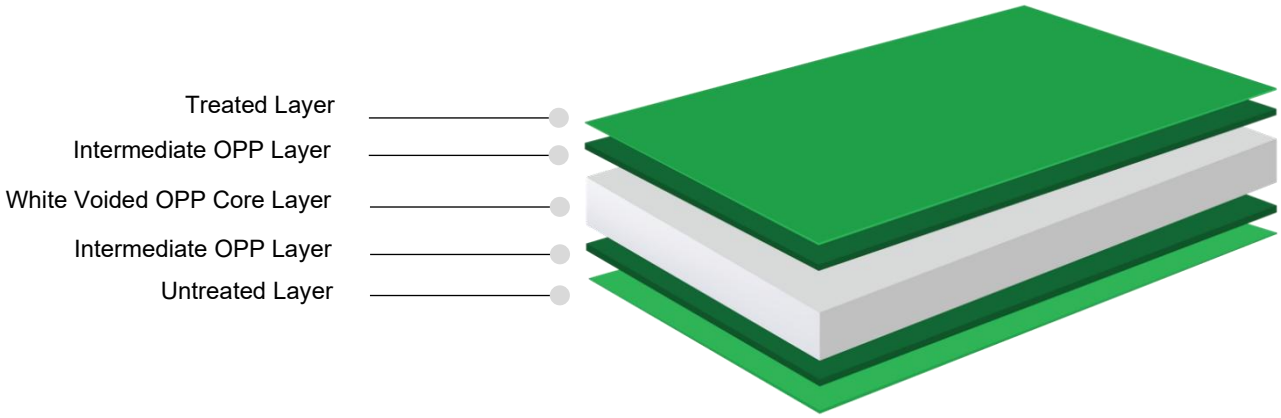

Key Features

- High yield
- Excellent opacity & Whiteness
- Excellent antistatic properties
- Excellent hot melt anchorage
- Excellent printability
- Good stiffness

Applications

- Roll Fed Label
- Rotogravure and flexographic printing

Why choose GulfPack?

Very High yield
More labels per square meter

Good stiffness
Rigid film for monolayer high-speed application

Better optics
White & Glossy print image

Controlled static
Designed for high-speed

Good Printability
Good reproduction of fine details

Food Contact

LW315 film complies with applicable EC and FDA food contact regulations and is suitable for use in the packaging, handling, and transportation of foodstuffs. Regulatory compliance documents and the Safety Information Sheet (MSDS) are available upon request.

Treatment Indication

LW315 film is usually supplied with treatment on the outside surface **(O)**; other treatment preference can be arranged upon agreement with a sales representative prior to order processing.

Technical Data Sheet

LW315

PROPERTIES			UNIT	TYPICALVALUES					TEST METHOD
PHYSICAL	Thickness		Microns	28	33	35	38	47	ASTM F 2251
			Gauge	112	132	140	152	188	
	Grammage		g/m^2	17.36	20.50	21.7	23.60	29.14	*GPIM
			lbs/ream	10.55	12.6	13.33	14.5	17.9	
	Yield		m^2/kg	57.60	48.80	46.08	42.40	34.30	
			in^2/lb	40,580	34,400	32,400	29,900	24,160	
	Density		g/cc	0.62					
	Coefficient of Friction (*UT/UT)			0.30					ASTM D 1894
	Treatment level (Treated Side)		dynes/cm	38					ASTM D 2578
OPTICAL	Opacity		%	80					ASTM D 589-97
	Gloss (45°)			90					ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	kg/mm^2	8					ASTM D 882
		*TD		14					
		MD	psi	11,378					
		TD		19,912					
	Elongation at Break	MD	%	140					ASTM D 882
		TD		40					
	Modulus of Elasticity	MD	N/mm^2	1300					ASTM D 882
		TD		2100					
		MD	psi	188,484					
		TD		304,475					
THERMAL	Thermal Shrinkage	MD	%	3.0					GPIM (120ºC(248ºF), 5 min, air)
		TD		1.0					

* GPIM – GulfPack Internal Method *MD – Machine Direction *TD – Transverse Direction *UT – Untreated side

Storage & Handling

Bi-axially oriented polypropylene (BOPP) films may age over time and can exhibit deterioration in certain properties if not stored under appropriate conditions. We strongly recommend storing the film in its original packaging at temperatures below 30°C.The film should be conditioned to the operating environment for at least 24 hours prior to processing.
Customers are advised to follow the recommended storage conditions and use the products on a First-In, First-Out (FIFO) basis within 6 months from the date of production.

Disclaimer

The values in this leaflet are typical and provided to the best of our knowledge, without warranty or guarantee. As application conditions are beyond our control, it is the customer's responsibility to ensure safe, lawful, and suitable use. Users must conduct their own testing to confirm product compatibility and performance.