# RayoForm™ ICU

## Technical Data Sheet

**ICU -** Clear, High Gloss Biaxially Oriented Polypropylene Film for In Mould and Cut and Stack Labelling.




### Features

- High gloss and transparency to allow the product to be seen
- High sheet feeding speed for sheet fed processes
- Anti-static
- Recyclable with polyolefin materials
- Balanced biaxial orientation
- Resistant to moisture, oils, grease, mild acids and bases.

### Printability

**RayoForm™ ICU** can be printed by flexographic, gravure, letterpress and screen processes. Its anti-static nature also makes it ideally suited to sheet fed litho processes. However, exact ink systems should be recommended by your supplier. Either surface of RayoForm™ ICU can be printed.

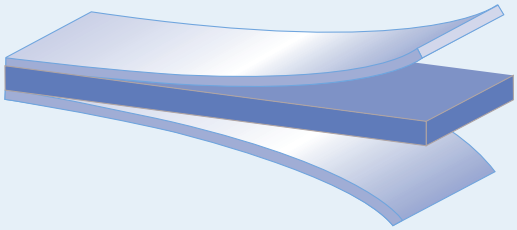


### Technical Properties (Typical Values)

| Property | Test Method | Test Conditions | Units | | ICU |
|---|---|---|---|---|---|
| Thickness | Innovia Films test | | micron | | 58 |
| Yield | Innovia Films test | | m²/kg<br>g/m² | | 18.9<br>52.9 |
| Optical:Gloss<br>Haze (wide angle) | ASTM D 2457<br>ASTM D 1003 | 45º<br>2.5º | % | | 85<br><2.0 |
| Tensile Strength | ASTM D 882 | Strain rate 50%/ min | MN/m² | MD<br>TD | 210<br>175 |
| Elongation at break | ASTM D 882 | Strain rate 50%/ min | % | MD<br>TD | 85<br>105 |
| Elasticity modulus (1% secant) | ASTM D 882 | Strain rate 10%/ min | MN/m² | MD<br>TD | 2500<br>2200 |
| Dimensional stability | Innovia Films Test | 60 secs at 130ºC | % | MD<br>TD | 3.0<br>1.0 |

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH unless otherwise stated.

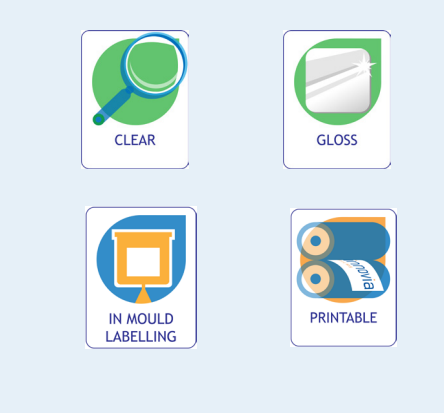

INNOVIA

*use our imagination...*

# RayoForm™ ICU

## Technical Data Sheet

## Applications

RayoForm™ ICU is a clear, biaxially oriented film for IML and other cut and stack labelling. Its superior optical properties make it ideally suited to injection in moulding labelling. The special polyolefin “adhesive” layer makes RayoForm™ ICU ideally suited for injection in mould labelling of polypropylene containers. Here its balanced orientation enables excellent die cutting of complex shapes and reduced container distortion after moulding.

## Reel Specifications
## Nominal Reel Diameters

| Film | Length / (metres) | | | | | |
|---|---|---|---|---|---|---|
| ICU58 | 625 | 1250 | 2500 | 3750 | 5000 | 7500 |
| Outside Diameter for 77mm core | 240mm | 330mm | 450mm | ns | ns | ns |
| Outside Diameter for 153mm core | ns | ns | 475mm | 570mm | 650mm | 785mm |

Alternative reel lengths/core sizes are available subject to negotiation.
ns= non-standard

## Film Storage and Handling

For the storage of RayoForm™ ICU it is recommended that dry conditions at temperatures below 30°C are employed to minimise any deterioration of surface discharge treatment level. RayoForm™ ICU is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

**Food Contact** - RayoForm™ ICU complies with the applicable EU legislation for most applications involving direct contact with food. Details are given on the Declaration of Compliance. Customers intending to use RayoForm™ ICU in a food contact application should request a copy of this document from Innovia Films.

**Health & Safety Guidelines** - For Health & Safety information, please refer to literature reference L190.

**Disclaimer:** Innovia Films or any of its affiliated companies (hereinafter ‘Innovia Films’) declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films’ best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client’s specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

**Regional Offices:**
Europe (UK) Tel +44 16973 42281
Americas (USA) Tel +1 877 822 3456
Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com
email: labels@innoviafilms.com
™Trademark of Innovia Films



INNOVIA

*use our imagination...*