RayoForm™ ICU47

Provisional Data Sheet

ICU - Clear, High Gloss Biaxially Oriented Polypropylene Film for In Mould and Cut and Stack Labelling.

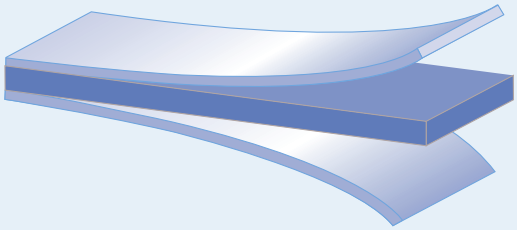

Features

- High gloss and transparency to allow the product to be seen
- High sheet feeding speed for sheet fed processes
- Anti-static
- Recyclable with polyolefin materials
- Balanced biaxial orientation
- Resistant to moisture, oils, grease, mild acids and bases.

Printability

RayoForm™ ICU47 can be printed by flexographic, gravure, letterpress and screen processes. Its anti-static nature also makes it ideally suited to sheet fed litho processes. However, exact ink systems should be recommended by your supplier. Either surface of RayoForm™ ICU can be printed.

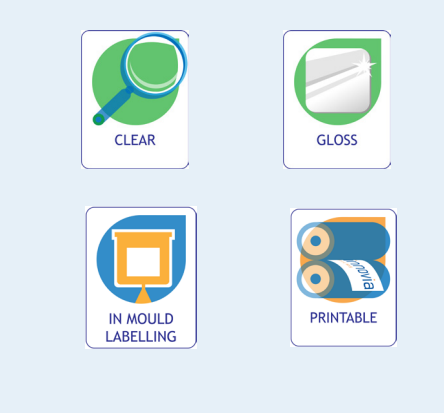

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units		ICU
Thickness	Innovia Films test		micron		47
Yield	Innovia Films test		m²/kg g/m²		23.5 42.6
Optical:Gloss Haze (wide angle)	ASTM D 2457 ASTM D 1003	45º 2.5º	%		85 <2.0
Tensile Strength	ASTM D 882	Strain rate 50%/ min	MN/m²	MD TD	210 175
Elongation at break	ASTM D 882	Strain rate 50%/ min	%	MD TD	85 105
Elasticity modulus (1% secant)	ASTM D 882	Strain rate 10%/ min	MN/m²	MD TD	2500 2200
Dimensional stability	Innovia Films Test	60 secs at 130ºC	%	MD TD	3.0 1.0

MD Machine Direction TD Transverse Direction

All properties are tested under standard laboratory conditions: 23 ± 2°C, 50 ± 5% RH unless otherwise stated.

INNOVIA

use our imagination...

RayoForm™ ICU47

Provisional Data Sheet

Applications

RayoForm™ ICU is a clear, biaxially oriented film for IML and other cut and stack labelling. Its superior optical properties make it ideally suited to injection in moulding labelling. The special polyolefin “adhesive” layer makes RayoForm™ ICU ideally suited for injection in mould labelling of polypropylene containers. Here its balanced orientation enables excellent die cutting of complex shapes and reduced container distortion after moulding.

Reel Specifications
Nominal Reel Diameters

Film	Length / (metres)					
ICU47	800	600	3200	4800	6400	9600
Outside Diameter for 77mm core	240mm	330mm	450mm	ns	ns	ns
Outside Diameter for 153mm core	ns	ns	475mm	570mm	650mm	785mm

Alternative reel lengths/core sizes are available subject to negotiation.
ns= non-standard

Film Storage and Handling

For the storage of RayoForm™ ICU it is recommended that dry conditions at temperatures below 30°C are employed to minimise any deterioration of surface discharge treatment level. RayoForm™ ICU is suitable for use for 6 months from the date of delivery and stocks should be used in rotation. Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact - RayoForm™ ICU complies with the applicable EU legislation for most applications involving direct contact with food. Details are given on the Declaration of Compliance. Customers intending to use RayoForm™ ICU in a food contact application should request a copy of this document from Innovia Films.

Health & Safety Guidelines - For Health & Safety information, please refer to literature reference L190.

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter ‘Innovia Films’) declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films’ best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client’s specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.

Regional Offices:
Asia-Pacific (Aus) Tel +61 3 9303 0600

www.innoviafilms.com
email: labels@innoviafilms.com
™Trademark of Innovia Films

INNOVIA

use our imagination...