iHBS515

Metallized High Barrier Film, Improved Heat Seal Strength

Gulf Pack
METALLIZED BOPP FILM

Gulf Pack iHBS515 is a high-barrier, metallized biaxially oriented polypropylene (BOPP) film; high sealing strength on one side and metallized on the other side.

Product Features:

- Excellent crease resistance in extrusion laminations
- Excellent moisture, oxygen and light barrier.
- High Sealing strength
- Excellent metal anchorage.
- Excellent hot tack properties.

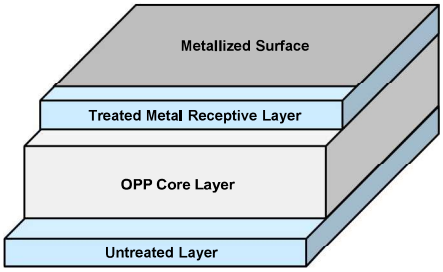

Applications:

- Inner sealing web of laminations used in gas-flushed packaging of(Snacks, Bakery, Confections and Cookies)
- Laminations with other GPIL OPP Films for fin-seal or lap-seal packaging
- Ideal for high moisture barrier requirements of reduced-fat food products
- Extrusion and adhesive laminations.

Properties			Unit	Typical values		Range of Variation	Method
PHYSICAL	Thickness		Microns	*20*	*30*	*± 5 % (*)*	ASTM D 374
			Gauge	*80*	*120*		
	Grammage		g/m^2	*18.20*	*27.30*	*± 5 % (*)*	*GPIM
			lbs/ream	*11.2*	*16.8*		
	Yield		m^2/kg	*54.95*	*36.63*	*± 5 % (*)*	
			in^2/lb	*38,700*	*25,800*		
OPTICAL	Optical Density		%	*2.5*		*± 10 %*	GPIM
MECHANICAL	Tensile Strength at Break	*MD	kg/mm^2	*15*		*≥13*	ASTM D 882
		*TD		*27*		*≥ 25*	
		MD	*psi*	*21,300*		*≥18,500*	
		TD		*38,400*		*≥3,5550*	
	Elongation at Break	MD	%	*170*		*≤ 215*	ASTM D 882
		TD		*50*		*≤ 65*	
THERMAL	Thermal Shrinkage	MD	%	*3.0*		*≤ 4.0*	GPIM (120°C (248°F) 5 min, air)
		TD		*1.0*		*≤ 2.0*	
	Heat Seal Range		°C (°F)	*105 – 140 (221 –284)*		*< 100 (212)*	GPIM
	Heat Seal Strength (Film/Film)		g/25mm	*900*		*≥ 850*	GPIM (130°C, 1bar, 1sec)
			lb./in	*1.9*		*≥ 0.60*	GPIM (266°F, 14.5psi, 1 sec)
BARRIER	Water Vapor Permeability (W.V.T.R.)		$g/m^2/24h$	*0.15*		*≤ 0.20*	ASTM F 1249 (38°C / 90% RH)
			g/100in2/24h	*0.01*		*≤ 0.013*	
	Oxygen Transmission Rate (O.T.R.)		cc/m2/24h	*15*		*≤ 20*	ASTM D 3985 (23°C / 0% RH)
			cc/in2/24h	*0.97*		*≤ 1.29*	

(*) - Single roll * GPIM – Gulf Pack Internal Method *MD – Machine Direction *TD – Transverse Direction

iHBS515

Metallized High Barrier Film, Improved Heat Seal Strength

Gulf Pack
METALLIZED BOPP FILM

Food contact:

Gulf Pack iHBS515 film comply with EU Regulation 10/2011/EC and USA FDA Code of Federal Regulations CFR21 section 177.1520 (c) 1.1 and are suitable for use in packaging, carrying and transporting foodstuffs.

Treatment surface Indication:

Gulf Pack iHBS515 film standard surface treatment location is on the outer side (O); other treatment preference can be arranged upon agreement with the sales representative before order processing.

Treatment retention of metallized film at the time of dispatch from the factory depends on the ambient conditions. So, the treatment level of metallized film cannot be guaranteed. Other film properties are guaranteed till 6 months from the date of production.

On-line refreshment of corona treatment is strongly recommended before processing the material.
An adequate primer is recommended when the metallized surface is to be printed.

Application, Storage and Handling:

Gulf Pack iHBS515 film should be allowed to reach operation room temperature for 24 hours before use.

Gulf Pack iHBS515 film does not require special storage conditions.

Bi-axially oriented polypropylene films age with time and will exhibit deterioration of some properties if not stored in a suitable environment at a temperature 30°C or below. We strongly advise our customers to use recommended storage conditions and consume products before 6 months from date of production in our plant.

The information contained in this technical leaflet illustrates typical values only and are to the best of our knowledge. Since the conditions under which our films may be used are beyond our control, such values are declared without warranty or guarantee.

Detailed advice regarding other specific applications of **Gulf Pack iHBS515** and other films in the Gulf Pack range is available upon request.